

DIGITAL SOLUTIONS
PRODUCT REFERENCES

CATALOGUE

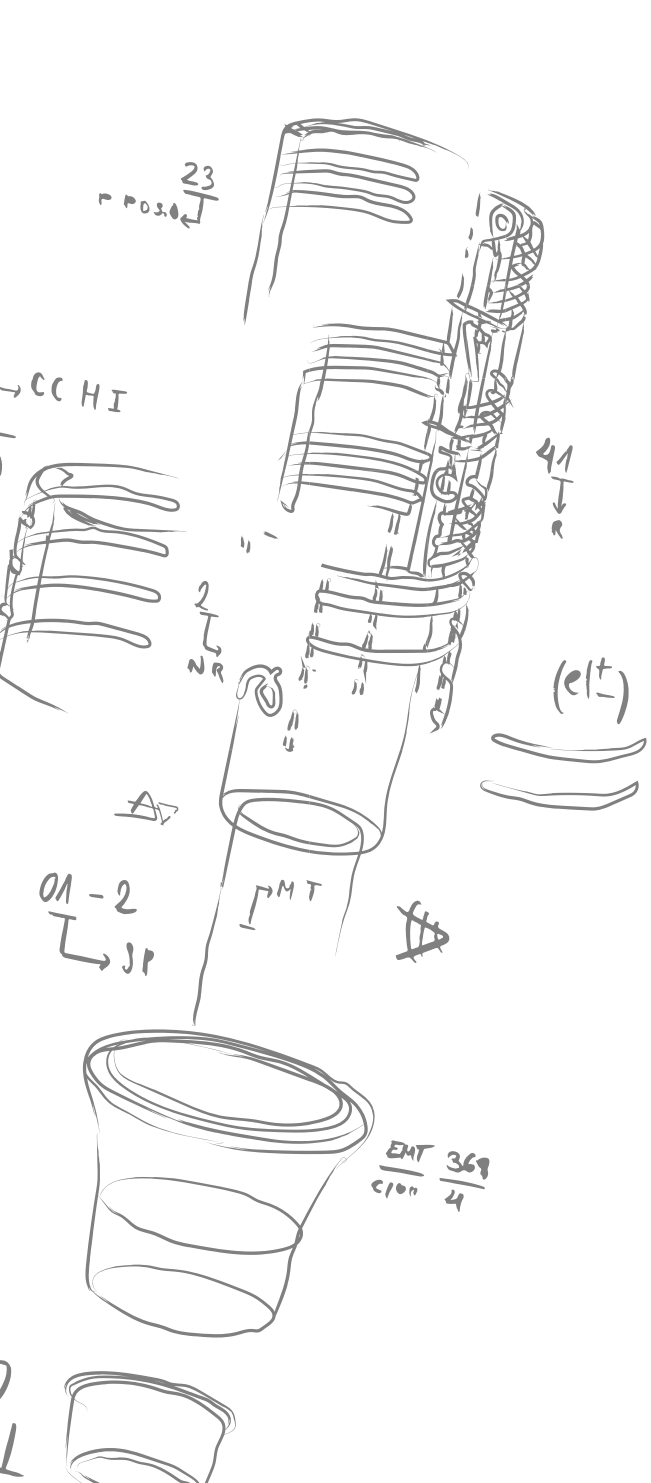

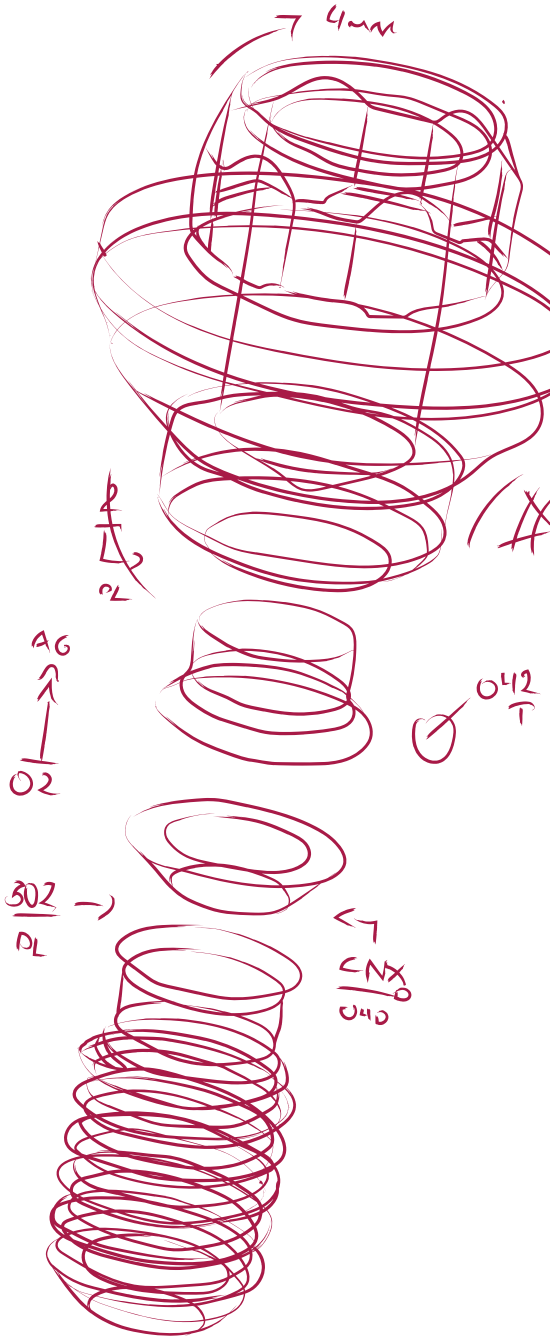

DYNAMIC ABUTMENT SOLUTIONS

DYNAMIC ABUTMENT **SOLUTIONS**

Virginia Woolf, 17
25005 · Lleida (Spain)

INTERNATIONAL +34 873 450 709
das@dynamicabutment.com

SPAIN +34 973 289 580
spain@dynamicabutment.com

Dynamic Abutment Solutions is the trademark of the manufacturer Talladium España S.L. The information included in this catalogue is exclusively addressed to professionals in dental sector.

All commercial trademarks mentioned herein are fully registered by their respective companies, and the images that appear are just to provide an orientation. Talladium reserves the right to modify this document without previous notice. Talladium is not responsible for the inadequate execution of these products if the warning indications corresponding to every reference are not contemplated.

Ask about the products available with CE legislation. Some of the products are not authorized for sale and distribution or do not have a sales license in some countries according to other legislations. Information: das@dynamicabutment.com.

INDEX

LIST OF COMPATIBILITIES AVAILABLE	5
COMPATIBILITIES AVAILABLE	9
COMPATIBILITIES AND REFERENCES	43
DAS LIBRARIES	332
MULTI-UNIT DAS LIBRARIES	333
DYNAMIC SCREWS TECHNICAL SPECIFICATIONS	334
STRAIGHT SCREWS TECHNICAL SPECIFICATIONS	336
SCREWDRIVERS AND STRAIGHT SCREWS	337
DYNAMIC MILLING TOOL SPECIFICATIONS	338
SCREWDRIVERS AND COMPLEMENTS	340
DAS MU SYSTEM COMPONENTS	341
INTERNAL DAS MU SYSTEM COMPONENTS	343

LIST OF COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

AB

ACE

ADIN

ALFA-GATE

ALPHABIO

ALPHA-DENT

ANCLADEN

ANKYLOS

ANTHOGYR

ARDS

ASTRA

AVINENT

B&W

BEGO

BIOCONCEPT

BIOGENESIS

BIOHORIZONS

BIOMET 3i

BIOLOK

BIONER

BIOTEC

BIOTEM

BREDENT MEDICAL

BTI

BTK

CAMLOG

CONEXÃO SISTEMA DE PRÓTESE

CORTEX

C-TECH

COWELLMEDI

DENTAL TECH

DENTAURUM

DENTEGRIS

DENTEM

DENTIS

DENTIUM

DIO IMPLANTS

DITRON

DMI DENTAL SUPPLY

DSP BIOMEDICAL

EASY IMPLANT

ECKERMANN

ELITE MEDICA

EUROTEKNIKA

F&B IMPLANT (FIT & BRILLIANT)

GALIMPLANT

GC TECH

GMI (ILERIMPLANT)

GT MEDICAL

HAHN IMPLANT (GLIDEWELL)

HIOSSEN

HI-TEC

IBS

IDO IMPLANTS

IHDE DENTAL (IMBIODENT)

IMPLANT DIRECT

IMPLANT GENESIS

IMPLANTSWISS

INTRA-LOCK

JDENTALCARE

KEYSTONE

KLOCKNER

KUWOTECH

LASAK

LEADER

MEDENTIKA

MEDENTIS

MEGAGEN

MICRODENT

MIS

MONOIMPLANT

MOZO-GRAU (TICARE)

MPI

NEOBIOTECH

NEODENT

NEOSS

NOBEL BIOCARE

NORIS MEDICAL

NORMON

NOVA IMPLANTS

OSSTEM IMPLANT

OSTEOPLUS

OXY

PALTOP

P-I BRANEMARK

PHIBO

POINT IMPLANT

PROCLINIC

PROTEG IMPLANTS

RADHEX

REFLECT

RITTER

ROOTT

SEWON MEDIX

SIC INVENT

SIGNO VINCES

SIN IMPLANTS

SOUTHERN IMPLANTS

STERI-OSS

STERNGOLD

STRAUMANN

SURCAM DENTAL

SYBRON IMPLANT SOLUTIONS

SYSTHEX

TBR

TITANIUM-FIX

TREE-OSS

TRI DENTAL IMPLANTS

TRINON

UFIT

VULKAN IMPLANTS

WARANTEC (ONEPLANT)

WIN

XIVE

YES IMPLANT

YOUSE IMPLANTS

ZIACOM

ZIMMER

MULTI-UNIT
DAS SYSTEM

DYNAMIC
DAS SYSTEM

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

AB	MODEL	IMPLANT	PLATFORM	CODE	
	I2	3.5/3.75/4.2/4.5/	STANDARD	**0040**	131
		5/6	STANDARD	**0040**	131
	I22	3.75/4.22	STANDARD	**0040**	131
	I5	3.5/3.75/4.2/4.5/	STANDARD	**0040**	131
		5/6/7/8	STANDARD	**0040**	131
	I55	3.75/4.2/4.5	STANDARD	**0040**	131
		5/6/7/8	STANDARD	**0040**	131
	I10	4.2/5	STANDARD	**0040**	131
	I15	6/7/8	STANDARD	**0040**	131
	MULTI UNIT D1-P64	Multi Unit D1-P64	UNIVERSAL	**0025**	103

ACE	MODEL	IMPLANT	PLATFORM	CODE	
	EXTERNAL HEX	3.3	NP 3.5	**0023**	99
		3.75/4	RP 4.1	**0024**	101
		4.75	WP 5	**0058**	163
	INFINITY TRI-CAM	3.5	3.5	**0026**	106
		4.3	4.3	**0027**	108
		5	5	**0028**	110
	INFINITY INTERNAL HEX	3.7/4.1	3.5	**0040**	131
		4.7/5.1	4.5	**0041**	136
	INFINITY OCTAGON	3.3	RP 4.8	**0037**	124
		4.1	RP 4.8	**0037**	124
		4.8	RP 4.8	**0037**	124
		4.8	WP 6.5	**0096**	201
	MULTI UNIT	Universal	UNIVERSAL	**0025**	103

ADIN	MODEL	IMPLANT	PLATFORM	CODE	
	SWELL	3.3	3.45	**0040**	131
		3.3	3.45	**0042**	131
		3.75/4.2	3.6	**0040**	131

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

ADIN	MODEL	IMPLANT	PLATFORM	CODE	
	SWELL	3.75/4.2	3.6	**0042**	131
		5	4	**0040**	131
		5	4	**0042**	131
		6	4.6	**0040**	131
		6	4.6	**0042**	131
	TOUAREG-S / TOUAREG-OS	3.5	3.45	**0040**	131
		3.5	3.45	**0042**	131
		3.75/4.2	3.6	**0040**	131
		3.75/4.2	3.6	**0042**	131
		5	4	**0040**	131
		5	4	**0042**	131
		6	5	**0040**	131
		6	5	**0042**	131
	TOUAREG CLOSEFIT	2.75	UNP	**0188**	279
		3	NP	**0145**	239
		3.5	RP	**0021**	93
		4.3/5	WP	**0022**	96
	TRIPLE	3.5/3.75/4.2/5/6	STANDARD	**0040**	131
		3.5/3.75/4.2/5/6	STANDARD	**0042**	131
	MULTI UNIT TMA	Universal	UNIVERSAL	**0025**	103

ALFA-GATE	MODEL	IMPLANT	PLATFORM	CODE	
	BIOACTIVE/POROUS/ TRIO/MAX	3.3/3.75/4.2/ 4.7/5.2/6	SP	**0040**	131
	CONICAL	3.5	NP	**0021**	93
		4.3/5	RP	**0022**	96

ALPHABIO	MODEL	IMPLANT	PLATFORM	CODE	
	INTERNAL HEX CONNECTION (IH) SPI	3.3/3.75/4.2/5/6	UNIVERSAL	**0040**	131
	INTERNAL HEX CONNECTION (IH) ICE	3.7/3.75/4.2/ 4.65/5.3	UNIVERSAL	**0040**	131

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

ALPHABIO	MODEL	IMPLANT	PLATFORM	CODE	
	INTERNAL HEX CONNECTION (IH) DFI	3.3/3.75/4.2/5	UNIVERSAL	**0040**	131
	INTERNAL HEX CONNECTION (IH) ATID	3.3/3.75/4.2/5/6	UNIVERSAL	**0040**	131
	INTERNAL HEX CONNECTION (IH) NEO	3.75/4.2/5	3.5	**0040**	131
	CONICAL HEX CONNECTION (CHC) NICE	3.2	NARROW	**0136**	236
	CONICAL HEX CONNECTION (CHC) NEO	3.2/3.5	NARROW	**0136**	236
	CONICAL STANDARD CONNECTION (CS)	3.75/4.2/5	STANDARD	**0169**	260
	MULTI UNIT ABUTMENT	-	UNIVERSAL	**0195**	285

ALPHA-DENT	MODEL	IMPLANT	PLATFORM	CODE	
	CLASSIC CONUS	3.3/3.75	3	**0265**	328
	ACTIVE CONUS	3.25/3.75	3	**0265**	328

ANCLADEN	MODEL	IMPLANT	PLATFORM	CODE	
	ANCLALOCK	3.75/4.25/5	3.5	**0040**	131

ANKLYOS	MODEL	IMPLANT	PLATFORM	CODE	
	ANKYLOS	3.5	3.5	**0075**	174
		4.5	4.5	**0075**	174
		5.5	5.5	**0075**	174
		7	7	**0075**	174
	BALANCE BASE NARROW	Universal	UNIVERSAL	**0183**	272

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

ANTHOGYR	MODEL	IMPLANT	PLATFORM	CODE	
	AXIOM BL REG / PX	3.4	3.4	**0161**	250
		4	4	**0149**	240
		4.6	4.6	**0149**	240
		5.2	5.2	**0162**	252
	ANTHOFIT HE	3.5/3.75/4	R (4.1)	**0024**	101
		5	L (5)	**0058**	163
	OSSFIT	3.5/4.2	4.8	**0074**	172
		3.5/4.2	4.8	**0037**	124
		5	6.5	**0096**	201
	MULTI UNIT	4.8	UNIVERSAL	**0163**	254

ARDS	MODEL	IMPLANT	PLATFORM	CODE	
	SMART	3.75/4.2/4.5	3.75	**0040**	131
	CLASSIC	3.3/3.75/4.2/5/6	3.75	**0040**	131
	PREMIUM	3.3/3.75/4.2/5/6	3.75	**0040**	131
	CIT	3.3/3.75/4.2/5/6	3.75	**0040**	131

ASTRA	MODEL	IMPLANT	PLATFORM	CODE	
	YELLOW	3	YELLOW (X-ESTRECHA)	**0109**	208
	AQUA	3.5/4	AQUA(ESTRECHA)	**0004**	52
	LILAC	4.5/5	LILAC (ANCHA)	**0005**	55
	UNIABUTMENT CONO 20°	Regular/Wide	REGULAR/WIDE	**0066**	171
	UNIABUTMENT CONO 45°	Regular/Wide	REGULAR/WIDE	**0067**	
	EVOLUTION/ PRIMETAPER	3	3.0	**0090**	194
		3.6	3.6	**0006**	57
		4.2	4.2	**0007**	60
		4.8	4.8	**0091**	196
		5.4	5.4	**0092**	199

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

ASTRA	MODEL	IMPLANT	PLATFORM	CODE	
	DS OMNITAPER EV	3	XS	**0090**	194
		3.4	S	**0006**	57
		3.8	M	**0007**	60
		4.5	L	**0091**	196
		5.5	XL	**0092**	199
	MULTIBASE ABUTMENT (SMARTFIX CONCEPT)	-	UNIVERSAL	**0258**	318

AVINENT	MODEL	IMPLANT	PLATFORM	CODE	
	HE/EC	3.3/3.5/4	3.5	**0023**	99
		3.3/3.8/4/4.2/ 4.8/4.5/5	4.1	**0024**	101
		4.8	5.1	**0061**	169
	HI/IC	3.1/3.5/4	3.5	**0040_B**	134
		3.3/3.8/4/4.2/ 4.8/4.5/5	4.1	**0040_B**	134
	TRANSEPITELIAL	-	REGULAR	**0025**	103

B&W	MODEL	IMPLANT	PLATFORM	CODE	
	HEXÁGONO EXTERNO	3.75/4	4.1	**0024**	101
		5	5	**0058**	163
	CÓNICO HEXAGONO INTERNO CIH	3.3/4	4	**0040**	131
		3.3/4	4	**0042**	131

BEGO	MODEL	IMPLANT	PLATFORM	CODE	
	RS/RSX	3.0	3.0	**0049**	152
	S/RI/RS/RSX	3.25/3.75	3.67	**0050**	153
		4.1	4.1	**0051**	155
		4.5	4.5	**0052**	157
		5.5	5.5	**0081**	179
	MINI	2.7/2.9/3.1	MINI	**0187**	277
	MULTIPLUS	-	UNIVERSAL	**0150**	242

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

BIOCONCEPT	MODEL	IMPLANT	PLATFORM	CODE	
	BC TISSUE LEVEL STANDARD	3.3/4.1/4.8	REGULAR	**0037**	124
	BC TISSUE LEVEL STANDARD PLUS	4.8	REGULAR	**0037**	124
	BC TISSUE LEVEL TAPERED EFFECT	4.8	REGULAR	**0037**	124
	BC BONE LEVEL	3.3	NARROW	**0033**	118
		4.1/4.8	REGULAR	**0035**	121
	BV TAPERED BONE LEVEL	3.5	NARROW	**0029**	112
		4/4.5/5	REGULAR	**0030**	115

BIOGENESIS	MODEL	IMPLANT	PLATFORM	CODE	
	3ICON	3.3	MINI (PINK)	**0023**	99
		3.75/4/4.3/4.5	REGULAR (BLUE)	**0024**	101
		5/5.5	WIDE (YELLOW)	**0058**	163
	ATICON	3.5/4/4.5/5	BLUE	**0005**	55
	ITICON	3.5/4.1/4.8	4.8	**0037**	124

BIOHORIZONS	MODEL	IMPLANT	PLATFORM	CODE	
	EXTERNAL	3.5	3.7 (YELLOW)	**0023**	99
	TAPERED INTERNAL	3/3.4	3 (GREY)	**0102**	205
		3.8	3.5 (YELLOW)	**0040**	131
		4.6	4.5 (GREEN)	**0041**	136
		5.8	5.7 (BLUE)	**0080**	177
	TAPERED PLUS	3.8	3 (GREY)	**0102**	205
		4.6	3.5 (YELLOW)	**0040**	131
		5.28	4.5 (GREEN)	**0041**	136
	MOUNT-FREE TAPERED INTERNAL	3/3.4	3 (GREY)	**0102**	205
		3.8	3.5 (YELLOW)	**0040**	131

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

BIOHORIZONS	MODEL	IMPLANT	PLATFORM	CODE	
	MOUNT-FREE TAPERED INTERNAL	4,6	4,5 (GREEN)	**0041**	136
		5,8	5,7 (BLUE)	**0080**	177
	TAPERED PRO	3,8	3 (GREY)	**0102**	205
		4,2/4,6	3,5 (YELLOW)	**0040**	131
		5,2	4,5 (GREEN)	**0041**	136
	TAPERED SHORT	4,6	3,5 (YELLOW)	**0040**	131
		5,8	4,5 (GREEN)	**0041**	136
	TAPERED PTG	4,2	3,5 (YELLOW)	**0040**	131
	TAPERED IM (INMEDIATE MOLAR)	7/8	5,7 (BLUE)	**0080**	177
	TAPERED TISSUE LEVEL	3/3,8	3,5 (YELLOW)	**0040**	131
		4,6	4,5 (GREEN)	**0041**	136
		5,8	5,7 (BLUE)	**0080**	177
	TAPERED PRO CONICAL	3,3/3,8	NARROW (GREY)	**0119**	214
		4,2/4,6/5,2	REGULAR (YELLOW)	**0120**	217
	MULTI UNIT	-	UNIVERSAL	**0025**	103

BIOMET 3i	MODEL	IMPLANT	PLATFORM	CODE	
	OSSEOTITE EXTERNAL HEX	3,25	3,4	**0003**	50
		3,75/4	4,1	**0024**	101
		5	5	**0058**	163
		6	6	**0179**	
	CERTAIN	3,25/4	3,4	**0001**	44
		4/5	4,1	**0002**	47
		5	5	**0057**	161
	LOW PROFILE	-	UNIVERSAL	**0025**	103

BIOLOK	MODEL	IMPLANT	PLATFORM	CODE	
	HEXÁGONO EXTERNO	3,45	3,45	**0003**	50

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

BIONER	MODEL	IMPLANT	PLATFORM	CODE	
	IKELT / BIKELT	3.3/3.75/4	4.1	**0024**	101
	IKELT	5	5	**0058**	163
	HIKELT	3.8	3.95	**0040**	131
		4.7	4.9	**0041**	136
	TOPDM	3.5	3.5	**0021**	93
		4	4	**0021**	93
		5	5	**0021**	93
	SHORT DM	4/5/6	UNIVERSAL	**0021**	93
	HIBIKELT	4/5	UNIVERSAL	**0021**	93
	TRANSEPITELIAL A-5M	Transepitelial A-5M	REGULAR	**0025**	103

BIOTEC	MODEL	IMPLANT	PLATFORM	CODE	
	SPR/CIM	3.3	3.3	**0040**	131
		3.75	3.75	**0040**	131
	SPR/SPTT/CIM	4.2	4.2	**0040**	131
		5	5	**0040**	131

BIOTEM	MODEL	IMPLANT	PLATFORM	CODE	
	AR FIXTURE	3.7/4/4.5	REGULAR	**0030**	115

BREDENT MEDICAL	MODEL	IMPLANT	PLATFORM	CODE	
	NARROW SKY	3.5	NP 3.5	**0110**	210
	BLUE SKY	3.5/4/4.5/5.5	4	**0111**	212
	BLUE SKY CLASSIC	3.5/4/4.5	4	**0111**	212
	COPA SKY	3.5/4/4.5/5/6	3.3	**0251**	314

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

BTI	MODEL	IMPLANT	PLATFORM	CODE	
	EXTERNA TINY	2.5/3.9/3/3.3/ 3.5/3.75	TINY 3.5	**0009**	65
	EXTERNA UNIVERSAL	3.75/4	UNIVERSAL 4.1	**0024**	101
	EXTERNA UNIVERSAL PLUS	4.5/5	UNIVERSAL PLUS 4.1	**0024**	101
	EXTERNA	4.5/5/5.5	ANCHA 5.5	**0060**	167
	INTERNA	3.3/3.5/3.75	3.5	**0257**	317
	INTERNA UNIVERSAL	3.3/3.5/3.75/ 4/4.25	UNIVERSAL 4.1	**0010**	67
	INTERNA UNIVERSAL PLUS	4.5/5/5.5	UNIVERSAL PLUS 4.1	**0010**	67
	INTERNA ANCHA	5.5/6/6.25	ANCHA 5.5	**0059**	165
	MULTI-IM	converter 4.1	UNIVERSAL 4.1	**0151**	243

BTK	MODEL	IMPLANT	PLATFORM	CODE	
	KLASSIC / KONIC	3.25	3.4 EN	**0003**	50
	KLASSIC / KONIC/LINE PLUS	3.25PL/3.75/4	4.1 ER	**0024**	101
	IS +/LINE PLUS IS+	3.3/3.7/4.1/4.8/6	DR	**0029**	112
	BT SAFE BL	3.3/3.7/4.1/4.8	KR	**0029**	112
	KLASSIC / KONIC	3.25/4	3.5 IR	**0040**	131
		3.25/4	3.5 IR	**0042**	131
	LINE PLUS IC+	3.25/3.75/4.25/5	LR	**0040**	131

CAMLOG	MODEL	IMPLANT	PLATFORM	CODE	
	CAMLOG SCREW-LINE/ PROGRESSIVE-LINE	3.3	3.3	**0087**	190
		3.8	3.8	**0011**	69
		4.3	4.3	**0012**	72

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

CAMLOG	MODEL	IMPLANT	PLATFORM	CODE	
	CAMLOG SCREW-LINE/ PROGRESSIVE-LINE	5	5	**0088**	192
		3.3	3.3	**0119**	214
		3.8	3.8	**0120**	217
		4.3	4.3	**0121**	220

CONEXÃO SISTEMA DE PRÓTESE	MODEL	IMPLANT	PLATFORM	CODE	
	NP 24° FLESH GOLD	3.5/3.75/4.3/5	UNIVERSAL	**0021**	127
	NP 24° FLASH	3.5/4.3/5	UNIVERSAL	**0021**	127
	NP 24° PTERYTRANS EX	3.5	UNIVERSAL	**0021**	127
	NP 24° SHORT® NP BLT	3.75/4.3	UNIVERSAL	**0021**	127
	NP 24° TORQ	3.5/3.75/4	UNIVERSAL	**0021**	127
	NP 24° EXPAND	3.75/4/5	UNIVERSAL	**0021**	127

CORTEX	MODEL	IMPLANT	PLATFORM	CODE	
	INTERNAL HEX DYNAMIX	3.3/3.8/4.2/5/6	3.75	**0040**	131
	INTERNAL HEX CLASSIX	3.3/3.8/4.2/5/6	3.75	**0040**	131
	INTERNAL HEX SATURN	3.8/4.2	3.5	**0040**	131
	CONICAL DYNAMIX	3	NP	**0109**	208
		3.3/3.8/4.2	RP	**0004**	52
		5/6	WP	**0005**	55
	CONICAL CLASSIX	3.3/3.8/4.2	RP	**0004**	52
		5/6	WP	**0005**	55
	CONICAL MAGIX	3.3/3.8/4.2	RP	**0004**	52
	MULTI UNIT	-	UNIVERSAL	**0025**	103

C-TECH	MODEL	IMPLANT	PLATFORM	CODE	
	EL ESTHETIC LINE	3.8/4.3/5.1	4	**0246**	309
	MULTI UNIT	-	UNIVERSAL	**0245**	308

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

COWELMEDI	MODEL	IMPLANT	PLATFORM	CODE	
	INNO - SUBMERGED TYPE	3.5/4/4.5/5/6	UNIVERSAL	**0030**	115
	INNO - EXTERNAL TYPE	5.0/6.0	5.1	**0061**	169
	MULTI S&A ABUTMENT Ø 4.5 MM	Multi S Abutment	UNIVERSAL	**0193**	283

DENTAL TECH	MODEL	IMPLANT	PLATFORM	CODE	
	IMPLOGIC	4.5	4.5 (BLUE)	**0041**	136

DENTAURUM	MODEL	IMPLANT	PLATFORM	CODE	
	TIOLOGIC	3.3	SMALL	**0130**	231
		3.7/4.2	MEDIUM	**0131**	232
		4.8/5.5	LARGE	**0132**	233

DENTEGRIS	MODEL	IMPLANT	PLATFORM	CODE	
	SLS-STRAIGHT	4.5	4.5	**0041_B**	139
	SINUS-LIFT	4.5	4.5	**0041_B**	139
	S&T IMPLANTS	4.5	4.5	**0041_B**	139

DENTEM	MODEL	IMPLANT	PLATFORM	CODE	
	-	-	REGULAR	**0030**	115

DENTIS	MODEL	IMPLANT	PLATFORM	CODE	
	ONEQ-SL	3	NARROW	**0014**	76
		3.9/4.2/4.7/5.2	REGULAR	**0030**	115
		6/7/8	WIDE	**0030**	115
	S-CLEAN TAPERED / TAPERED II	3.7	MINI	**0030**	115
		4.1/4.3	REGULAR	**0030**	115
		4.8	WIDE	**0030**	115

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

DENTIS	MODEL	IMPLANT	PLATFORM	CODE	
	S-CLEAN STRAIGHT	4,1/4,8	4,1/4,8	**0030**	115
	S-CLEAN SAVE	5,5/6	5,5/6	**0030**	115
	SQ-SL	3,5	NARROW	**0014**	76
		4/4,5/5	REGULAR	**0030**	115
		6/7/8	WIDE	**0030**	115
	E-CLEAN	3,5	MINI	**0023**	99
		4,1	REGULAR	**0024**	101
		5,1	WIDE	**0061**	169

DENTIUM	MODEL	IMPLANT	PLATFORM	CODE	
	NR LINE	3,1	3,2	**0190**	280
		3,1	3,6	**0190**	280
		3,6	3,6	**0191**	281
		4,3	4,3	**0191**	281
		5	5	**0191**	281
		6	6	**0191**	281
	MULTI UNIT NR LINE		5	**0192**	282
	SIMPLELINE II	3,8/4,3	4,8	**0074**	172
		3,8/4,3	4,8	**0037**	124
		4,3/4,8	6,5	**0096**	201
	SUPERLINE/SUPERLINE II/IMPLANTIUM	3,4	3,6	**0030**	115
		3,8	4	**0030**	115
		4,3	4,5	**0030**	115
		4,8	5	**0030**	115
		4,8	6	**0030**	115
	MULTI UNIT SUPERLINE AND IMPLANTIUM	-	4,5	**0193**	283

DIO IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	SM SYSTEM	3,8/4,1	NARROW	**0076**	
		4,5/5/5,3	REGULAR/WIDE	**0013**	75
	UF II NARROW	3/3,3	NARROW	**0014**	76

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

DIO IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	UF II	3,8/4/4,5/5/5,5	REGULAR	**0030**	114
	EXTERNAL	3,3/3,8	NARROW 3,5	**0023**	99
		3,75/4/4,5	REGULAR 4,1	**0024**	101
		5/5,3/5,5/6	WIDE 5,1	**0061**	169
	INTERNAL OCTA	-	4,8	**0074**	172
	MULTI UNIT	-	UNIVERSAL	**0247**	310

DITRON	MODEL	IMPLANT	PLATFORM	CODE	
	ULTIMATE MATRIX	3,75/4,2	3,75	**0040**	131
		5	4	**0040**	131
		6	4,6	**0040**	131
	MPI MATRIX	3,5	3,5	**0040**	131
		3,75	3,75	**0040**	131
		4,2	4,2	**0040**	131
		5	5	**0040**	131
		6	6	**0040**	131

DMI DENTAL SUPPLY	MODEL	IMPLANT	PLATFORM	CODE	
	DCI/DSI	3,3/3,5/3,75/ 4,2/5/6	3,75	**0040**	131

DSP BIOMEDICAL	MODEL	IMPLANT	PLATFORM	CODE	
	HEXÁGONO EXTERNO	3,75/4/5/ 3,5/3,8/4,3	4,1	**0024**	101

EASY IMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	MASTER C	3,5	3,5 (OCEAN)	**0004**	52
		4	4 (OCEAN)	**0004**	52
		4,5	4,5 (LILAS)	**0030**	115
		5	5 (LILAS)	**0030**	115

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

EASY IMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	MASTER S	3.3	3.3 (OCEAN)	**0004**	52
		3.75	3.75 (LILAS)	**0030**	115
		4.25	4.25 (LILAS)	**0030**	115
		4.75	4.75 (LILAS)	**0030**	115
	MASTER L	3.3	3.3 (LILAS)	**0030**	115
		3.75	3.75 (LILAS)	**0030**	115
		4.25	4.25 (LILAS)	**0030**	115
		4.75	4.75 (LILAS)	**0030**	115
	MINI	3	3	**0176**	268
	HEXCEL-S	3.3	3.3	**0003**	50
		3.75	4.1	**0024**	101
		4.25	4.1	**0024**	101
		4.75	5	**0058**	163
	MULTI UNIT CONICAL ABUTMENT	-	UNIVERSAL	**0025**	103

ECKERMANN	MODEL	IMPLANT	PLATFORM	CODE	
	ALL-SPIRAL	4	REGULAR	**0069**	
	DUPLO	4	REGULAR	**0070**	
	HEXAGON	3/3.5/4/4.5/5	4.1	**0024**	101
	WINNER	3/3.5/4	3.5	**0040_B**	134
		3/3.5/4	3.5	**0042**	131
		4/4.5/5	4.5	**0041_B**	139
		4/4.5/5	4.5	**0043**	

ELITE MEDICA	MODEL	IMPLANT	PLATFORM	CODE	
	CONEXIÓN EXTERNA	3.75	NARROW	**0023**	99
		4	REGULAR	**0024**	101
		5	WIDE	**0061**	169

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

EUROTEKNIKA	MODEL	IMPLANT	PLATFORM	CODE	
	NATURACTIS	3.5	3.4	**0004**	52
		4	3.8	**0004**	52
		4.5	4.3	**0004**	52
		5	4.8	**0004**	52
	UNEVA	3.6	4.1	**0024**	101
		4.1	4.1	**0024**	101
	UNEVA (PLATFORM SWITCHING)	4.8	4.1	**0024**	101
		6	4.1	**0024**	101
	NATEA	3.6/4.1/4.8	NARROW	**0004**	52
		3.6/4.1/4.8	REGULAR	**0004**	52
		6	WIDE	**0004**	52
	AESTHETICA	4.1	4.8	**0074**	172
		4.1	4.8	**0037**	124
		4.8	6.5	**0096**	201
	NATURALL	3.5	NARROW	**0004**	52
		4/4.5	REGULAR	**0004**	52
		5	WIDE	**0004**	52
	IBONE E/IBONE S	3.8/4.3/4.8	3.5	**0004**	52
		4.8/5.5/6.2	4.3	**0004**	52
	IBONE G	4.8/5.5	RP	**0037**	124
		5.5/6.2	WP	**0096**	201
	MULTI UNIT TETRA	Universal	UNIVERSAL	**0025**	103

F&B IMPLANT (FIT & BRILLIANT)	MODEL	IMPLANT	PLATFORM	CODE	
	FA SUBMERGED FIXTURE	3.9	NARROW	**0030**	115
		4.1/4.4	REGULAR	**0030**	115
		4.8	WIDE	**0030**	115
		5.3/5.8/6.3/6.8	ULTRA-WIDE	**0030**	115

GALIMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	CONEXIÓN EXTERNA	3.5/4	4	**0024**	101
		3.5	3.5	**0004**	52

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

GALIMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	CONEXIÓN EXTERNA	4	4	**0004**	52
		5	5	**0004**	52
	PILAR MULTI-POSICION RECTO / PILAR MULTI-POSICION ANGULADO	Universal	UNIVERSAL	**0025**	103

GC TECH	MODEL	IMPLANT	PLATFORM	CODE	
	AADVA STANDARD / TAPERED IMPLANTS	3.3	NARROW	**0196**	287
		4	REGULAR	**0197**	288
		5	WIDE	**0198**	289

GMI (ILERIMPLANT)	MODEL	IMPLANT	PLATFORM	CODE	
	AVANTGARD	3.75/4.25	RP	**0243**	307
	PHOENIX	3.3/3.75/4	STANDARD 4.1	**0024**	101
		5	WIDE 5.1	**0061**	169
	FRONTIER	3.3/3.75/4.25	RP 3.3	**0040_B**	134
		4.75/5.75	WP 4.3	**0041_B**	139
	UNIVERSAL	Universal	PS-RP 4.8	**0025**	103

GT MEDICAL	MODEL	IMPLANT	PLATFORM	CODE	
	BEST FIT HEXÁGONO INTERNO	3.7/4.1/4.3/4.8	WIDE	**0005**	55
		3.7/4.3/4.8	REGULAR	**0074**	172
		3.7/4.3/4.8	REGULAR	**0037**	124
	BEST FIT HEXÁGONO EXTERNO	3.5	NARROW	**0023**	98
		4.1	REGULAR	**0024**	101
		5.1	WIDE	**0061**	169

HAHN IMPLANT (GLIDEWELL)	MODEL	IMPLANT	PLATFORM	CODE	
	HAHN TAPERED IMPLANT	3	3	**0159**	246
		3.5/4.3	3.5/4.3	**0021**	93
		5	5	**0022**	96
		7	7	**0124**	223
	MULTI-UNIT ABUTMENT SYSTEM	Universal	UNIVERSAL	**0025**	103

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

HIOSSEN	MODEL	IMPLANT	PLATFORM	CODE	
	ETII SA / ETIII SA	3.5	MINI	**0029**	112
	ETII SA / ETIII SA / ETIV SA	4/4.5/5	REGULAR	**0030**	115
	ETIII BA	3.5	MINI	**0029**	112
		4/4.5/5	REGULAR	**0030**	115

HI-TEC	MODEL	IMPLANT	PLATFORM	CODE	
	TAPERED SELF THREAD	3.3/3.75	3.5	**0040**	131
		4.2/5	4.5	**0041**	136
	LOGIC PLUS	3.5	3.7	**0040**	131
		4.3	3.9	**0040**	131
		5/6	4.1	**0040**	131
	LOGIC / IMPLEX	3/3.5	3.5	**0021**	93
		3.5	3.9	**0021**	93
		4.3/5/6	3.9	**0022**	93

IBS	MODEL	IMPLANT	PLATFORM	CODE	
	MAGIC FC	4/4.5/5/5.5/ 6/6.5	3.8	**0030**	115
	N.R. FIX	3/3.5	3.8	**0030**	115

IDO IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	I Do Implant	3.8/4/4.5/5/ 5.5/6/7	UNIVERSAL	**0030**	115

IHDE DENTAL (IMBIODENT)	MODEL	IMPLANT	PLATFORM	CODE	
	BONE LEVEL PLUS	3.3	3.3	**0033**	118
		4.1	4.1	**0035**	121
		4.8	4.8	**0035**	121

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

IMPLANT DIRECT	MODEL	IMPLANT	PLATFORM	CODE	
	REPLUS / REPLANT / REACTIVE	3.5/3.7/4.2	3.5	**0026**	106
		4.3/4.7	4.3	**0027**	108
		5/5.7	5	**0028**	110
	LEGACY	3.7/4.2	3.5	**0040**	131
		4.7/5.2	4.5	**0041**	136
	SWISHPLANT / SWISHPLUS	4.1/4.8	4.8	**0074**	172
		4.1/4.8	4.8	**0037**	124
		4.8/5.7	6.5	**0096**	201
	SWISHACTIVE	3.3	3	**0021**	93
		4.1/4.8	3.4	**0022**	96
	INTERACTIVE	3.2/3.7	3	**0021**	93
		4.3/5	3.4	**0022**	96
	SIMPLY ICONIC	3.2/3.7/4.2	PURPLE 3.0	**0021**	93
		4.7/5.2/5.7	GOLD 3.4	**0022**	96
	MULTI UNIT ABUTMENT	-	5	**0158**	245

IMPLANT GENESIS	MODEL	IMPLANT	PLATFORM	CODE	
	AKTIV SYSTEM	3.5/3.75/4.2/5	STANDARD	**0040**	131

IMPLANTSWISS	MODEL	IMPLANT	PLATFORM	CODE	
	BONE LEVEL	3.3	3.3	**0004**	52
		3.7	3.7	**0030**	115
		4.3	4.3	**0030**	115
		4.8	4.8	**0030**	115
		5.5	5.5	**0030**	115
	MULTI UNIT ABUTMENT	Universal	4.8	**0025**	103

INTRA-LOCK	MODEL	IMPLANT	PLATFORM	CODE	
	UNIHEX	4	REGULAR	**0024**	101
		4.75	WIDE	**0024**	101
	INTRAHEX	3.75/4	3.5	**0040**	131
		4.75	4.5	**0041**	136

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

JDENTALCARE	MODEL	IMPLANT	PLATFORM	CODE	
	JDEVOLUTION/ JDEVOLUTION PLUS	3.7	3.7	**0040**	131
		4.3/5	4	**0040**	131
		6	5	**0040**	131
	JD PTERYGO	4	4	**0040**	131
	JD ICON/JD ICON F	3.9	3.9	**0022**	96
		4.3	4	**0022**	96
		5	4.7	**0022**	96
	JD ICON PLUS	3.7	3.7	**0015**	79
		4.3	4	**0015**	79
		5	4.8	**0015**	79
	JD ICON PLUS T	3.5	3.5	**0015**	79
		4	3.5	**0015**	79
		4.5	3.5	**0015**	79
	CONICAL ABUTMENT	-	UNIVERSAL	**0025**	103

KEYSTONE	MODEL	IMPLANT	PLATFORM	CODE	
	RESTORE	3.75/4	RD 4.1	**0024**	101
		5/6	WD 5	**0061**	169
	INTERNAL TILOBE PRIMACONNEX	3.3/3.5	3.5	**0044**	141
		4/4.1	4.1	**0045**	143
		5	5	**0046**	145
	INTERNAL TILOBE PRIMA PLUS	3.5	3.5	**0044**	141
		4.1	4.1	**0045**	143
		5/6	5	**0046**	145

KLOCKNER	MODEL	IMPLANT	PLATFORM	CODE	
	ESSENTIAL CONE	3.5/4/4.5	4.5	**0054**	159
		4.8	6	**0071**	
	ESSENTIAL CONE PILAR 25°	3.5/4/4.5	4.5	**0054**	159
	ESSENTIAL CONE OCTACONE 12°	3.5/4/4.5	4.5	**0054**	159

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

KLOCKNER	MODEL	IMPLANT	PLATFORM	CODE	
	KL	3.3	NARROW	**0023**	99
		3.7/4.2	REGULAR	**0024**	101
		4.7	WIDE	**0061**	169
	VEGA	3.5	NV	**0082**	181
		4/4.5	RV	**0083**	183
	VEGA+	3.6	NV	**0082**	181
		4.1/4.6	RV	**0083**	183
	MULTI UNIT PERMANENT	4.2	UNIVERSAL	**0173**	267

KUWOTECH	MODEL	IMPLANT	PLATFORM	CODE	
	KISPLANT	3.5	SMALL	**0030**	115
		4/4.5/5/5.5/6	REGULAR&WIDE	**0030**	115

LASAK	MODEL	IMPLANT	PLATFORM	CODE	
	BIONIQ	2.9	QN (AMARILLO)	**0166**	256
		3.5	QR (AZUL)	**0167**	258
		4	QR (AZUL)	**0167**	258
		5	QR (AZUL)	**0167**	258

LEADER	MODEL	IMPLANT	PLATFORM	CODE	
	TIXOS INTERNAL HEX	3.3	3.5	**0040**	131
		3.75	4	**0040**	131
		3.3/3.75	4.1	**0024**	101
		5	5	**0058**	163

MEDENTIKA	MODEL	IMPLANT	PLATFORM	CODE	
	MULTI UNIT	-	UNIVERSAL	**0025**	103

MEDENTIS	MODEL	IMPLANT	PLATFORM	CODE	
	PREMIUM / ACTIVE MASTER	3.3	3.3 (PINK)	**0249**	312
		3.75	3.75 (RED)	**0125**	225

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

MEDENTIS	MODEL	IMPLANT	PLATFORM	CODE	
	PREMIUM / ACTIVE MASTER	4,1	4,1 (GREEN)	**0125**	225
		4,8	4,8 (BLUE)	**0125**	225
	MULTI UNIT	-	UNIVERSAL	**0025**	103

MEGAGEN	MODEL	IMPLANT	PLATFORM	CODE	
	ANYRIDGE	3,5	SMALL	**0015**	79
		4/4,5	REGULAR	**0015**	79
		5/5,5	WIDE	**0015**	79
	ANYONE INTERNAL	3,5/4/4,5/5/6/7	GENERAL	**0030**	115
	ANYONE EXTERNAL	3,5	SMALL 3,5	**0023**	99
		4	REGULAR 4,1	**0024**	101
		4,5	REGULAR 4,5	**0024**	101
		5	WIDE 5	**0058**	163
		6	SUPERWIDE 5,5	**0058**	163
	CONE ABUTMENT	Universal	3,8	**0128**	228
		Universal	4,8	**0074**	172
	MINI NARROW RIDGE	3/3,4	MINI	**0014**	76
	EXFEEL	3,5	SMALL	**0037**	124
		4,1	REGULAR	**0037**	124
		4,8/5	WIDE	**0037**	124
	BLUE DIAMOND/BD CUFF/ANYRIDGE OCTA	3,3/3,7	NC	**0222**	297
		4,1/4,4/4,8/5,3/ 5,8/6,3	RC	**0223**	299
	MULTI UNIT N TYPE	Multi Unit N Type	UNIVERSAL	**0025**	103
	MULTI UNIT S TYPE	Multi Unit S Type	UNIVERSAL	**0264**	327

MICRODENT	MODEL	IMPLANT	PLATFORM	CODE	
	UNIVERSAL	2,8/3,25	3,5	**0003**	50
		3,3/3,5/3,75/4	4,1	**0024**	101
		4,2/5	5,1	**0058**	163
	SYSTEM	2,8/3,25	3,5	**0003**	50
	EKTOS	3,7/4,2	3,5	**0040_B**	134

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

MIS	MODEL	IMPLANT	PLATFORM	CODE	
	LANCE	3,75/4,2	STANDARD	**0024**	101
		5	WIDE	**0058**	163
	MULTI-UNIT	-	GENERAL	**0020**	91
	SEVEN	3,3	NARROW	**0019**	89
		3,75/4,2	STANDARD	**0040**	131
		5/6	WIDE	**0041**	136
	M4	3,3	NARROW	**0019**	89
		3,75/4,2	STANDARD	**0040**	131
		5/6	WIDE	**0041**	136
	C1	3,3	NARROW	**0016**	82
		3,75/4,2	STANDARD	**0017**	84
		5	WIDE	**0018**	87
	V3	3,9/4,3/5	STANDARD	**0017**	84

MONOIMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	MONOIMPLANT MULTI UNIT	3/3,7/4,1	4,8	**0025**	103

MOZO-GRAU (TICARE)	MODEL	IMPLANT	PLATFORM	CODE	
	MG OSSEOUS	3,3	3,4 MINI	**0003**	50
		3,4/3,75/4,25	4,1 STANDARD	**0024**	101
		5	5 MAXI	**0061**	169
	MG INHEX	-	CON 45°	**0067**	
		3,3	2,3 MINI	**0109**	208
		3,75/4,25	2,8 STANDARD	**0004**	52
		5	3,8 MAXI	**0005**	55

MPI	MODEL	IMPLANT	PLATFORM	CODE	
	CONEXIÓN EXTERNA HE PRIVILEGE	3,3	3,5	**0009**	65
		3,3/4	4,1	**0024**	101
		5	5	**0058**	163
	PRIVILEGE CM	3,5/4	REGULAR	**0004**	52
		5	WIDE	**0005**	55

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

MPI	MODEL	IMPLANT	PLATFORM	CODE	
	EXCELLENCE CM	3.5/4	REGULAR	**0004**	52
		5	WIDE	**0005**	55

NEOBIOTECH	MODEL	IMPLANT	PLATFORM	CODE	
	EB EXTERNAL SYSTEM	3.5	NARROW	**0023**	99
	IS IMPLANT SYSTEM	3.2	S-NARROW	**0029**	112
		3.5	NARROW	**0030**	115
		4	REGULAR	**0030**	115
		4.5	REGULAR	**0030**	115
		5	WIDE	**0030**	115
		-	4.8	**0025**	103

NEODENT	MODEL	IMPLANT	PLATFORM	CODE	
	HELIX GM/DRIVE GM/ TITAMAX GM	3.5/3.75/4/ 4.3/5/6	REGULAR	**0186**	274
	SMART HE	3.75/4	4.1	**0024**	101
	HELIX HE	3.75/4/4.3	4.1	**0024**	101
	MINI PILAR CM / MINI PILAR ANGULADO CM	Mini Pilar CM / Mini Pilar Angulado CM	UNIVERSAL	**0025**	103

NEOSS	MODEL	IMPLANT	PLATFORM	CODE	
	PROACTIVE STRAIGHT/ TAPERED/EDGE	3.25 Royal Blue	3.25	**0144**	
		3.5 Green	STANDARD	**0047**	147
		4 Yellow	STANDARD	**0047**	147
		4.5 Blue	STANDARD	**0048**	149
		5 Peach	STANDARD	**0048**	149
		5.5 Lilac	STANDARD	**0048**	149
	PROACTIVE WIDE	6	STANDARD	**0048**	149
	PROACTIVE SINUS	6.5	STANDARD	**0048**	149
	SHORT IMPLANT	3.5/4/4.5	STANDARD	**0047**	147
		5/5.5/6/6.5	STANDARD	**0048**	149

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

NOBEL BIOCARE	MODEL	IMPLANT	PLATFORM	CODE	
	BRANEMARK	3.3	NARROW	**0023**	99
		3.75/4	REGULAR	**0024**	101
		5/6	WIDE	**0061**	169
	REPLACE	3.5	NARROW	**0026**	106
		4.3	REGULAR	**0027**	108
		5	WIDE	**0028**	110
		6	PLATFORM 6	**0129**	229
	ACTIVE/REPLACE CONICAL CONNECTION	3	MINI 3.0	**0159**	246
		3.5	NARROW	**0021**	93
		4.3/5	REGULAR	**0022**	96
		5.5	WIDE	**0124**	223
	NOBELSPEEDY	3.3	NARROW	**0023**	99
		4/5	REGULAR	**0024**	101
		5/6	WIDE	**0061**	169

NOBEL BIOCARE	MODEL	IMPLANT	PLATFORM	CODE	
	NOBELPARALLEL	3.75	NARROW	**0021**	93
		4.3/5	REGULAR	**0022**	96
		5.5	WIDE	**0124**	223

NORIS MEDICAL	MODEL	IMPLANT	PLATFORM	CODE	
	TUFF	3.3/3.75/4.2/5/6	3.75	**0040**	131
	TUFF TT	3.3/3.75/4.2/5/6	3.75	**0040**	131
	ONIX	3.3/3.75/4.2/5/6	3.75	**0040**	131
	CORTICAL	4.0/5/6	3.75	**0040**	131
	PTERYCORE	4.2	3.75	**0040**	131
	PTERYFIT	4.2	3.75	**0040**	131

NORMON	MODEL	IMPLANT	PLATFORM	CODE	
	NORMOIMPLANT HE	3.25/3.75/4.25/ 4.75	4.1	**0024**	101
	NORMOIMPLANT HI	3.75/4.25/4.75	3.5	**0040_B**	134

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

NOVA IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	PSI/PCI	3.3/3.75/4.2/5/6	3.75	**0040_B**	134

OSSTEM IMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	TS	3	MINI 3.0	**0029**	112
		3.5	MINI 3.5	**0029**	112
		4/4.5/5/6/7	REGULAR	**0030**	115
	US	3.3/3.5	MINI 3.5	**0023**	99
		3.75/4/4.5	REGULAR 4.1	**0024**	101
		5/5.5	WIDE 5.1	**0061**	169
		5/5.5	WIDE PS 5	**0058**	162
	MULTI UNIT ABUTMENT/ESTHETIC LOW ABUTMENT	Universal	MINI/REGULAR	**0025**	103

OSTEOPLUS	MODEL	IMPLANT	PLATFORM	CODE	
	SHE	3.45	3.45	**0009**	65
		3.75 / 4	4	**0024**	101
	SHI	3.3 / 3.75 / 4.2	3.5	**0040**	131

OXY	MODEL	IMPLANT	PLATFORM	CODE	
	K1 LINE	3.5/4/4.5/5	REGULAR	**0015**	79
		5.5/6/6.5	WIDE	**0015**	79
	PSK LINE	3.5/4/4.5/5	REGULAR	**0015**	79
	MD LINE KONE	3.75/4.25/5	REGULAR	**0015**	79
	MD LINE EXT	3.75/4.25	STANDARD	**0024**	101
	FIXO	Universal	4.8	**0242**	305

PALTOP	MODEL	IMPLANT	PLATFORM	CODE	
	ADVANCED CLASSIC	3.25	NARROW (BLUE)	**0229**	302
		3.75/4.2/5	STANDARD	**0040_B**	134

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

PALTOP	MODEL	IMPLANT	PLATFORM	CODE	
	ADVANCED CLASSIC	3,75/4,2/5	STANDARD	**0042**	131
		6	WIDE (PURPLE)	**0041**	136
	ADVANCED +	3,25	NARROW (BLUE)	**0229**	302
		3,75/4,2/5	STANDARD	**0040_B**	134
		3,75/4,2/5	STANDARD	**0042**	131
		6	WIDE (PURPLE)	**0041**	136
	DYNAMIC	3,25	NARROW (BLUE)	**0229**	302
		3,75/4,2/5	STANDARD	**0040_B**	134
		3,75/4,2/5	STANDARD	**0042**	131
		6	WIDE (PURPLE)	**0041**	136
	PAI	3,25	NARROW (BLUE)	**0229**	302
		3,75/4,2/5	STANDARD	**0040_B**	134
		3,75/4,2/5	STANDARD	**0042**	131
		6	WIDE (PURPLE)	**0041**	136
	DIVA/ACTIVE	3,75/4,2/5	STANDARD	**0040_B**	134
		3,75/4,2/5	STANDARD	**0042**	131
	CONICAL ACTIVE	3,25/3,75/4,2/5	STANDARD	**0029/0182**	112
	UNIVERSAL MULTI-UNIT	Multi-Unit	UNIVERSAL	**0181**	270

P-I BRANEMARK	MODEL	IMPLANT	PLATFORM	CODE	
	MT	3.3	3,5 (RED)	**0178**	269
		3,75	4,1 (GREEN)	**0178**	269
		4,8	5,1 (YELLOW)	**0178**	269

PHIBO	MODEL	IMPLANT	PLATFORM	CODE	
	TSH/BNT SERIE 3	3,6	4	**0024**	101
	TSH/BNT SERIE 4	4,2	4	**0024**	101

POINT IMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	SM II SYSTEM UV IMPLANT	4/4,5/5	REGULAR	**0030**	115

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

PROCLINIC	MODEL	IMPLANT	PLATFORM	CODE	
	CILINDRICO EXTERNO	3.3	3.3 MINI	**0009**	65
	CILINDRICO EXTERNO/ CÓNICO EXTERNO	3.75/4.25/3.5/4	4.1 ESTANDAR	**0024**	101
		5	5 MAXI	**0058**	163
		3.3/3.75/4.25/5/ 3.5/4/5	3.5	**0040**	131
	SP OCTA	3.3/4.1/4.8	4.8	**0074**	172
		3.3/4.1/4.8	4.8	**0037**	124
		4.8	6.5	**0096**	201
	AQUA CM	3.5/4/5	2.82	**0004**	52

PROTEG IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	PR01	3.3/3.75/4.2/5/6	NARROW	**0265**	328

RADHEX	MODEL	IMPLANT	PLATFORM	CODE	
	PHE	3.5	3.5	**0023**	99
		4/4.5/5	4.1	**0024**	101
	PHI	3.75	3.5	**0040_B**	134
		4.5/5	4.5	**0041_B**	139

REFLECT	MODEL	IMPLANT	PLATFORM	CODE	
	RAPID	3.0	3.0	**0159**	246
		3.5	NP	**0021**	93
		4.3/5/5.5	RP	**0022**	96
	RECOVER	3.5	NP	**0021**	93
		4.3/5	RP	**0022**	96
	ASPIRE	3.5/4	AQUA (ESTRECHA)	**0004**	51
		5	LILAC (ANCHA)	**0005**	54
	TAPERED SCREW	3.5	3.5	**0040**	131
		4.1/4.7	4.5	**0041**	136

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

RITTER	MODEL	IMPLANT	PLATFORM	CODE	
	SB/LA/QSI	3.75/4.2/5/6	STANDARD	**0040_B**	134

ROOTT	MODEL	IMPLANT	PLATFORM	CODE	
	R	3.5/3.8/4.2/ 4.8/5.5	UNIVERSAL	**0236**	303

SEWON MEDIX	MODEL	IMPLANT	PLATFORM	CODE	
	IH2 SLA SYSTEM	3.5	MINI	**0029**	112
		3.5/4/4.5/5	REGULAR	**0030**	115
	IH2 RBM SYSTEM	3.5	MINI	**0029**	112
		3.5/4/4.5/5	REGULAR	**0030**	115
	IH SYSTEM	3.5/4/4.5/5	UNIVERSAL	**0025**	103

SIC INVENT	MODEL	IMPLANT	PLATFORM	CODE	
	HEXAGONAL SYSTEM SICACE	3.4/4	3.3	**0170**	263
		4.5/5	4.2	**0171**	265
	HEXAGONAL SYSTEM SICMAX	3.4/4.2	3.3	**0170**	263
		4.7/5.2	4.2	**0171**	265
	HEXAGONAL SYSTEM SICTAPERED	3.4/4.2	3.3	**0170**	263
		4.7/5.2	4.2	**0171**	265

SIGNO VINCES	MODEL	IMPLANT	PLATFORM	CODE	
	DUO	4.6	4.1	**0024**	101
	INTTEGRA	3.75/4	4.1	**0024**	101
	COMPACT	4.5	CM3.8	**0004**	51
	DUOCON	3.8	CM3.8	**0004**	51
		4.6/5.5	CM4.6	**0005**	54
	INFRA	3.3/3.8/4.6	CM	**0004**	51

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

SIN IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	HE	3.75	4.1	**0024**	101
	HI SW	3.8	3.8	**0039**	129
	TRYON	3.25/3.75/4	4.1	**0024**	101
	TRYON CO	4	4.1	**0024**	101
	REVOLUTION	3.25/3.75/4	4.1	**0024**	101
	STYLUS	4	4.1	**0024**	101
	EPIKUT/EPIKUT PLUS	4.5	4.5	**0024**	101
		5	5	**0058**	163
	MINI PILAR	Universal	UNIVERSAL	**0025**	103

SOUTHERN IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	TRI-NEX	3.5	3.5	**0026**	106
		4.3	4.3	**0027**	108
		5	5	**0028**	110
		6	6	**0129**	229
	IT CONNECTION	3.3/4/4.1/4.9/5	4.8	**0037**	124
		4.9/5/6	6.5	**0096**	201
	EXTERNAL HEX	3.25	3.4	**0003**	49
		3.75/4	4.1	**0024**	101
		4.7/5	5	**0058**	163
		5.7/6	6	**0058**	163
	DEEP CONICAL	3	2.45	**0109**	208
		3.5/4	2.95/3.1	**0004**	52
		5	4.1	**0005**	55
	INTERNAL HEX	3.75/4.2/5	UNIVERSAL	**0040**	131
	PROVATA	4/5/6	STANDARD	**0040**	131
	COMPACT CONICAL	4.8	4.8	**0025**	103

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

STERI-OSS	MODEL	IMPLANT	PLATFORM	CODE	
	HEX-LOC	3.25	3.3	**0023**	99

STERNGOLD	MODEL	IMPLANT	PLATFORM	CODE	
	STERN EX	3.75/4/5	4.1	**0024**	101

STRAUMANN	MODEL	IMPLANT	PLATFORM	CODE	
	TISSUE LEVEL	3.3	3.5	**0160**	248
		3.3/4.1/4.8	REGULAR 4.8	**0037**	124
		4.8	WIDE 6.5	**0096**	201
	SYNOCTA	-	REGULAR 4.8	**0074**	172
		-	WIDE 6.5	**0137**	238
	BONE LEVEL TAPERED SC	2.9	SC- 2.9	**0135**	234
	BONE LEVEL	3.3	NC- 3.3	**0033**	118
		4.1	RC-4.1	**0035**	121
		4.8	RC-4.8	**0035**	121
	SCREW-RETAINED	NC/RC Ø4.6	UNIVERSAL	**0101**	203
	BLX	3.5/3.75/4/4.5	RB (REGULAR BASE)	**0207**	292
		5/5.5/6.5	WB (WIDE BASE)	**0208**	295
	BLC	3.3/3.75	RB	**0207**	292
		4.5/5.5/6.5	WB	**0208**	295
	TLX / TLX S	3.75/4.5	NT	**0260**	321
		3.75/4.5	RT	**0261**	323
		5.5/6.5	WT	**0262**	325
	TLC	3.3	NT	**0260**	321
		3.3/3.75/4.5	RT	**0261**	323
		4.5/5.5/6.5	WT	**0262**	325

SURCAM DENTAL	MODEL	IMPLANT	PLATFORM	CODE	
	MULTI-UNIT	-	UNIVERSAL	**0181**	270

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

SYBRON IMPLANT SOLUTIONS	MODEL	IMPLANT	PLATFORM	CODE	
	ENDOPORE (INNOVA)	4,1	4,1	**0024**	101

SYSTHEX	MODEL	IMPLANT	PLATFORM	CODE	
	CLASSIC-CI / ESTETIC-CI	3,5/3,75/4	4,1	**0024**	101

TBR	MODEL	IMPLANT	PLATFORM	CODE	
	HEX-CONIC	3,5	NARROW	**0023**	99
		5	WIDE	**0058**	163
	CONNECT / INFINITY	3,5	3,5	**0266**	329
		4	4	**0267**	330
		5	5	**0268**	331
	BABY 8	4	4	**0267**	330
		5	5	**0268**	331

TITANIUM-FIX	MODEL	IMPLANT	PLATFORM	CODE	
	B-FIX	3,5/4	REGULAR	**0004**	51
		4,5/5	LARGA	**0005**	54

TREE-OSS	MODEL	IMPLANT	PLATFORM	CODE	
	SIMPLE	3,3/3,75/5	3,75 AMARILLO	**0040**	131
	RAPID/ANATOMIC	3,3	3,5 ROSA	**0023**	99
		3,75/4	4,1 AMARILLO	**0024**	101
		5	5,1 AZUL	**0061**	169
	ANATOMIC/HS	3,5	3,5 ROSA	**0026**	106
		4,3	4,3 AMARILLO	**0027**	108
		5	5 AZUL	**0028**	110
	MULTI UNIT	-	UNVERSAL	**0025**	103

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

TRI DENTAL IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	TRI-VENT	3.75/4.1/4.7	3.5	**0040**	131
		3.75/4.1/4.7	3.5	**0042**	131

TRINON	MODEL	IMPLANT	PLATFORM	CODE	
	Q2	3.5/3.75/4.5	4	**0024**	101
	QK	4	4.8	**0074**	172
		4	4.8	**0037**	124

UFIT	MODEL	IMPLANT	PLATFORM	CODE	
	GT2	3.5	MINI	**0004**	51
		4/4.5	REGULAR	**0005**	54
		5	WIDE	**0005**	54
		5.5/6/6.5/7	ULTRA-WIDE	**0005**	54
	NT2	3.5	MINI	**0004**	51
		4/4.5	REGULAR	**0005**	54
		5	WIDE	**0005**	54
		5.5/6/6.5/7	ULTRA-WIDE	**0005**	54

VULKAN IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	IN-HEX	3.3/3.75/4.2/5	3.75	**0040**	131

WARANTEC (ONEPLANT)	MODEL	IMPLANT	PLATFORM	CODE	
	IU IMPLANT SYSTEM	3.3/3.6	MINI	**0004**	51
		3.6	MINI	**0004**	51

WIN	MODEL	IMPLANT	PLATFORM	CODE	
	WIN	3.30/3.75/4.25/5	3.75	**0040_B**	134
		Universal	UNVERSAL	**0025**	103

COMPATIBILITIES AVAILABLE

DYNAMIC ABUTMENT SOLUTIONS

XIVE	MODEL	IMPLANT	PLATFORM	CODE	
	XIVE	3	3	**0084**	185
		3.4	3.4	**0038**	127
		3.8	3.8	**0039**	129
		4.5	4.5	**0085**	186
		5.5	5.5	**0086**	188

YES IMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	S-SYSTEM	3.3/3.5	NARROW	**0030**	115
		4/4.5	REGULAR	**0030**	115
		5/5.5	WIDE	**0030**	115

YOUSE IMPLANTS (Sweden & Martina Group)	MODEL	IMPLANT	PLATFORM	CODE	
	YOUSE-V/YOUSE-VL	3.3/3.7	NARROW	**0021**	93
		4.2/5	REGULAR	**0022**	96

ZIACOM	MODEL	IMPLANT	PLATFORM	CODE	
	OEX	3.75/4.25	RP 4.1	**0024**	101
	ZINIC	3.7/4/4.3	RP 3.5	**0040_B**	134
	ZINIC SHORTY	4.75	RP 3.5	**0040_B**	134
	GALAXY	3.4/3.7/4	RP 2.85	**0004**	51

ZIMMER	MODEL	IMPLANT	PLATFORM	CODE	
	SCREW-VENT	3.7/4.1	3.5	**0040**	131
		3.7/4.1	3.5	**0042**	131
		4.7	4.5	**0041**	136
		4.7	4.5	**0043**	
		6	5.7	**0080**	177
	TSX IMPLANT	3.1	2.9	**0178**	269
		3.7/4.1/4.7	3.5	**0040**	131
		3.7/4.1/4.7	3.5	**0042**	131

COMPATIBILITIES AVAILABLE

ZIMMER	MODEL	IMPLANT	PLATFORM	CODE	
	TSX IMPLANT	5.4/6	4.5	**0041**	136
	SWISS-PLUS	3.7/4.1/4.8	4.8	**0074**	172
		3.7/4.1/4.8	4.8	**0037**	124
	EZTETIC	3.1	2.9	**0178**	269
	TAPERED ABUTMENT	Universal	UNIVERSAL	**0205**	290

This printed version is probably outdated and may not include all products or compatibilities.

Scan and download the latest version of this catalogue

www.dynamicabutment.com


MULTI-UNIT
DAS SYSTEM

DYNAMIC
DAS SYSTEM

LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} = Direct to implant maximum angulation

COMPATIBLE WITH
0001

LIST OF COMPATIBILITIES **AVAILABLE**
BIOMET 3i

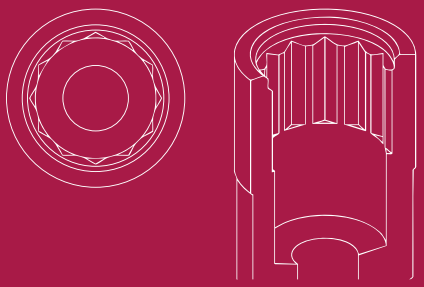

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	43°	29°	31.322.001.01-2	31.312.001.01-2
1,2	25°	22°	31.322.001.02-2	31.312.001.02-2
2	25°	-	31.322.001.03-2	31.312.001.03-2
3	20°	-	31.322.001.04-2	31.312.001.04-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,3	25°	20°	10°	31.322.001.21-2	31.312.001.21-2
2	25°	20°	10°	-	31.312.001.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.312.001.01-2	43.621.410.01-2
12	52.412.103.01-2	50.312.001.04-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.390.754.01-2
4	25°	33.490.754.01-2
6		33.690.754.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.612.001.01-2	34.612.001.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.001.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.084.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.003.01-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.001.01-2
2	42.302.001.02-2
3	42.302.001.03-2
4	42.302.001.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{DI} - Direct to implant maximum angulation

COMPATIBLE WITH

OOO2

LIST OF COMPATIBILITIES **AVAILABLE**

BIOMET 3i

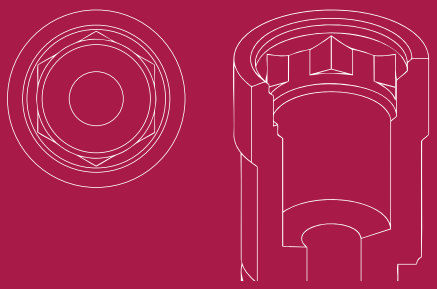

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	29°	31.323.002.01-2	31.313.002.01-2
1,2	25°	22°	31.323.002.02-2	31.313.002.02-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,3	25°	20°	10°	31.323.002.21-2	31.313.002.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2	50.313.002.01-2	43.621.410.01-2 43.624.410.01-2
10	52.410.101.01-2		
12	52.412.101.01-2		



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.805.01-2
4		33.490.805.01-2
6		33.690.805.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.613.002.01-2	34.613.002.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.002.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.084.01-2 41.320.044.01-2 41.320.050.01-2 (IMPLANT DIRECT)	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2

STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.003.01-2	Hex. 1.20	43.601.103.02-2





LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT


GH (mm)	NON ENGAGING
1	42.303.002.01-2
2	42.303.002.02-2
3	42.303.002.03-2
4	42.303.002.04-2

VIEW COMPONENTS



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
0003

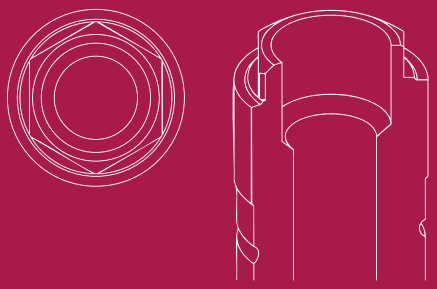

LIST OF COMPATIBILITIES **AVAILABLE**

BIOMET 3i - BIOLOK - BTK - EASY IMPLANT - MICRODENT - MOZO-GRAU (TICARE) - SOUTHERN IMPLANTS

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	30°	31.322.003.01-2	31.312.003.01-2
0,5	25°	30°	31.322.003.02-2	31.312.003.02-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1	30°	25°	15°	31.322.003.23-2	31.312.003.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.104.01-2	50.312.003.01-2	43.621.410.01-2
12	52.412.104.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.612.003.01-2	34.612.003.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.003.21-2	49.414.000.01-2	6	A	43.601.103.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.065.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.003.02-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
0004

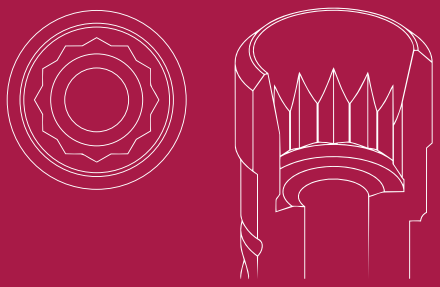

LIST OF COMPATIBILITIES **AVAILABLE**

ASTRA - CORTEX - EASY IMPLANTS - EUROTEKNIKA - GALIMPLANT - IMPLANTSWISS - MOZO-GRAU (TICARE) - MPI - PROCLINIC
REFLECT - SIGNO VINCES - SOUTHERN IMPLANTS - TITANIUM-FIX - UFIT - WARANTEC (ONEPLANT) - ZIACOM

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	45°	29°	31.323.004.01-2	31.313.004.01-2
2	30°	20°	31.323.004.02-2	31.313.004.02-2
3	25°	25°	31.323.004.03-2	31.313.004.03-2
4	20°	25°	31.323.004.04-2	31.313.004.04-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1	25°	20°	10°	31.323.004.21-2	31.313.004.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.313.004.01-2	43.621.410.01-2
12	52.412.103.01-2	50.313.004.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.004.02-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.390.754.01-2
4		33.490.754.01-2
6		33.690.754.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.613.004.01-2	34.613.004.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.004.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.316.076.01-2	41.316.118.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.02-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.004.01-2
2	42.303.004.02-2
3	42.303.004.03-2
4	42.303.004.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°


GH (mm)	ENGAGING
2.5/3.9	48.312.004.02-2
3.5/4.9	48.312.004.03-2
4.5/5.9	48.312.004.04-2

VIEW COMPONENTS



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OOO5

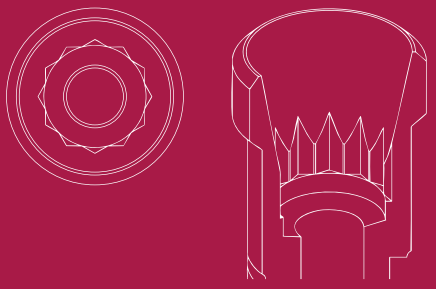

LIST OF COMPATIBILITIES **AVAILABLE**

ASTRA - BIOGENESIS - CORTEX - GT MEDICAL - MOZO-GRAU (TICARE) - MPI - REFLECT - SIGNO VINCES - SOUTHERN IMPLANTS TITANIUM-FIX - UFIT

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	38°	23°	31.324.005.01-2	31.314.005.01-2
2	25°	15°	31.324.005.02-2	31.314.005.02-2
3	20°	-	31.324.005.03-2	31.314.005.03-2
4	15°	-	31.324.005.04-2	31.314.005.04-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1	25°	20°	10°	31.324.005.21-2	31.314.005.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.102.01-2	50.314.005.01-2	43.621.410.01-2
12	52.412.102.01-2	50.314.005.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.958.01-2
4		33.490.958.01-2
6		33.690.958.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.614.005.01-2	34.614.005.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.005.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.320.090.01-2	41.320.137.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.005.03-2	Hex. 1.27	43.625.105.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
0006

LIST OF COMPATIBILITIES **AVAILABLE**

ASTRA

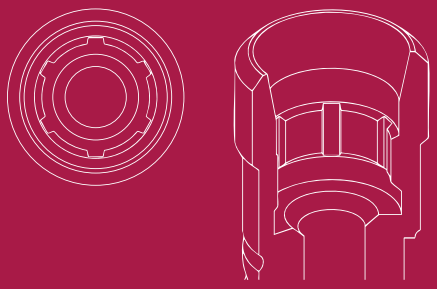

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,2	40°	20°	31.322.006.01-2	31.312.006.01-2
2	25°	12°	31.322.006.02-2	31.312.006.02-2
3	20°	30°	31.322.006.03-2	31.312.006.03-2
4	15°	30°	31.322.006.04-2	31.312.006.04-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1.2	30°	20°	15°	31.322.006.21-2	31.312.006.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.105.01-2	50.312.006.03-2 (IG=3mm)	43.621.410.01-2
12	52.412.105.01-2		43.624.410.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.006.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.330.734.01-2
4		33.430.734.01-2
6		33.630.734.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.612.006.01-2	34.612.006.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.006.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.316.072.01-2	41.316.115.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.01-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.006.01-2
2	42.302.006.02-2
3	42.302.006.03-2
4	42.302.006.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
2.5/3.9	48.312.006.02-2
3.5/4.9	48.312.006.03-2
4.5/5.9	48.312.006.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
0007

LIST OF COMPATIBILITIES **AVAILABLE**

ASTRA

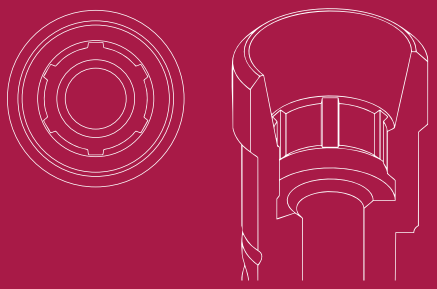

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1.5	38°	17°	31.323.007.01-2	31.313.007.01-2
2	25°	12°	31.323.007.02-2	31.313.007.02-2
3	25°	-	31.323.007.03-2	31.313.007.03-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1.5	25°	20°	10°	31.323.007.21-2	31.313.007.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2		
10	52.410.101.01-2	50.313.007.01-2	43.621.410.01-2
		50.313.007.03-2	43.624.410.01-2
12	52.412.101.01-2	(IG=3mm)	



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.007.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.350.775.01-2
4		33.450.775.01-2
6		33.650.775.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.613.007.01-2	34.613.007.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.007.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.074.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.005.02-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.007.01-2
2	42.303.007.02-2
3	42.303.007.03-2
4	42.303.007.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
1,5/2,9	48.312.007.01-2
2,5/3,9	48.312.007.02-2
3,5/4,9	48.312.007.03-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

OOO8

LIST OF COMPATIBILITIES **AVAILABLE**

ASTRA

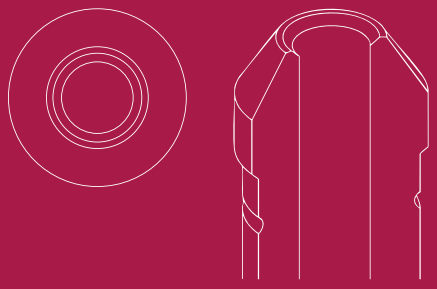

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	30°	31.323.008.01-2	-



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0.5	25°	20°	10°	31.323.008.21-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.113.01-2	50.313.008.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.413.008.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.370.716.01-2
4		33.470.716.01-2
6		33.670.716.01-2

ANALOG

DIGITAL ANALOG
34.613.008.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.008.31-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



CAPS	HEIGHT	TYPE
49.418.000.01-2	3,8	Regular
49.418.000.02-2	3,8	Wide
49.419.000.01-2	6	Regular
49.419.000.02-2	6	Wide
49.420.000.01-2	8	Regular
49.420.000.02-2	8	Wide

SCREWS

DYNAMIC SCREW	LENTH	SCREWDRIVER
41.318.045.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.005.01-2	Hex. 1.27	43.625.105.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
0009

LIST OF COMPATIBILITIES **AVAILABLE**

BTI - MPI - OSTEOPLUS - PROCLINIC

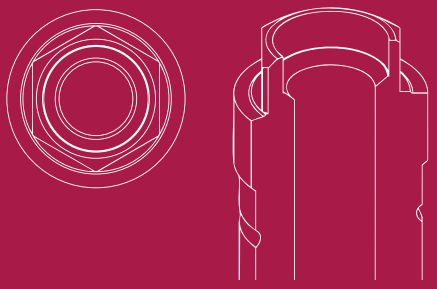

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	25°	31.322.009.01-2	31.312.009.01-2
0,5	25°	25°	31.322.009.02-2	31.312.009.02-2
1	25°	-	31.322.009.03-2	31.312.009.03-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.114.01-2	50.312.009.01-2	43.621.410.01-2
12	52.412.114.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.612.009.01-2	34.612.009.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.320.065.01-2	24	43.624.201.01-2
	32	43.632.201.01-2


STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.008.01-2	Hex. 1.20	43.625.108.01-2



COMPATIBLE WITH
OO10

LIST OF COMPATIBILITIES **AVAILABLE**

BTI

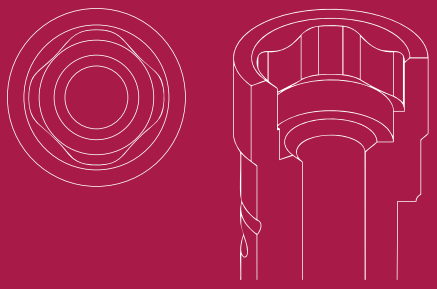

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	29°	31.323.010.01-2	31.313.010.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.115.01-2	50.313.010.01-2	43.621.410.01-2
12	52.412.115.01-2	50.313.010.04-2 (IG=3mm)	43.624.410.012



LAB SCANBODY
30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.613.010.01-2	34.613.010.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.065.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.003.01-2	Hex. 1.20	43.601.103.02-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.010.01-2
2	42.303.010.02-2
3	42.303.010.03-2
4	42.303.010.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
0011

LIST OF COMPATIBILITIES **AVAILABLE**

CAMLOG

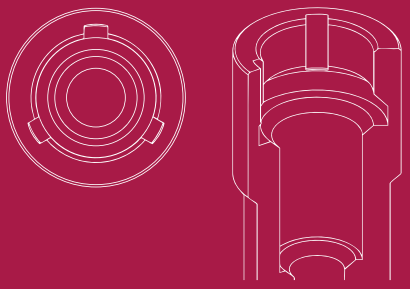

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	25°	29°	31.322.011.01-2	31.312.011.01-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,3	25°	25°	15°	-	31.312.011.21-2
2	25°	20°	15°	-	31.312.011.23-2
3	25°	20°	10°	-	31.312.011.24-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.108.01-2	50.312.011.01-2	43.621.410.01-2
12	52.412.108.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	20°	33.345.804.01-2	34.612.011.01-2
4		33.445.804.01-2	
6		33.645.804.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.011.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.094.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.04-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.011.01-2
2	42.302.011.02-2
3	42.302.011.03-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
OO12

LIST OF COMPATIBILITIES **AVAILABLE**

CAMLOG

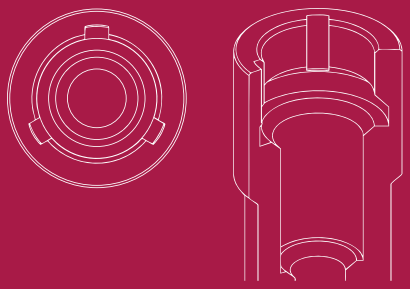

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	25°	30°	31.323.012.01-2	31.313.012.01-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,3	25°	25°	15°	-	31.313.012.21-2
2	25°	20°	15°	-	31.313.012.23-2
3	25°	20°	10°	-	31.313.012.24-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.109.01-2	50.313.012.01-2	43.621.410.01-2
12	52.412.109.01-2		43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	20°	33.345.804.01-2	34.613.012.01-2
4		33.445.804.01-2	
6		33.645.804.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.012.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.094.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.04-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.012.01-2
2	42.303.012.02-2
3	42.303.012.03-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
0013

LIST OF COMPATIBILITIES **AVAILABLE**

DIO IMPLANTS

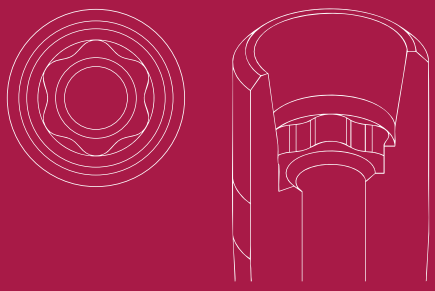

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,7	43°	23°	31.323.013.01-2	31.313.013.01-2



LAB SCANBODY
30.413.002.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.074.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.007.02-2	TORX T6	43.601.107.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
OO14

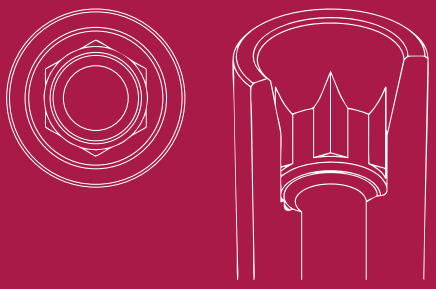

LIST OF COMPATIBILITIES **AVAILABLE**

DENTIS - DIO IMPLANT - MEGAGEN

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,2	41°	23°	31.322.014.01-2	31.312.014.01-2
2	25°	17°	31.322.014.02-2	31.312.014.02-2
3	20°	25°	-	31.312.014.03-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
3	25°	20°	15°	31.322.014.23-2	31.312.014.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.128.01-2	50.312.014.03-2 (IG=3mm)	43.621.415.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.014.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	25°	33.345.804.01-2	34.612.014.01-2
4		33.445.804.01-2	
6		33.645.804.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.014.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.314.067.01-2	41.314.105.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.003.04-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
2	42.302.014.02-2
3	42.302.014.03-2
4	42.302.014.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
3.5/4.9	48.312.014.03-2
4.5/5.9	48.312.014.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
OO15

LIST OF COMPATIBILITIES **AVAILABLE**

OXY - JDENTALCARE - MEGAGEN

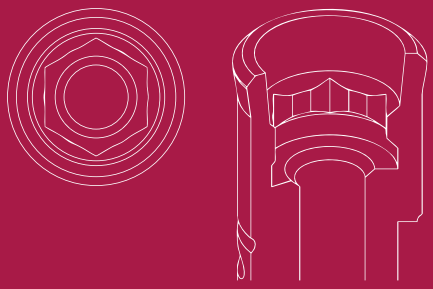

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,7	43°	23°	31.323.015.01-2	31.313.015.01-2
2,5	25°	15°	31.323.015.02-2	31.313.015.02-2
3	25°	-	31.323.015.03-2	31.313.015.03-2
4	20°	-	31.323.015.04-2	31.313.015.04-2
5	15°	-	31.323.015.05-2	31.313.015.05-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1	30°	25°	20°	31.323.015.27-2	31.313.015.27-2
1,7	30°	25°	10°	31.323.015.21-2	31.313.015.21-2
2,5	25°	20°	10°	31.323.015.22-2	31.313.015.22-2
3,5	25°	20°	10°	-	31.313.015.26-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.104.01-2	50.313.015.01-2	43.621.410.01-2
12	52.412.104.01-2	50.313.015.03-2 (IG=3mm)	43.624.410.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.015.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.390.805.01-2
4		33.490.805.01-2
6		33.690.805.01-2

ANALOG

DIGITAL ANALOG
34.613.015.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.015.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.075.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.003.02-2	Hex. 1.20	43.601.103.02-2

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.015.01-2
2	42.303.015.02-2
3	42.303.015.03-2
4	42.303.015.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
1,5/2,9	48.312.015.01-2
2,5/3,9	48.312.015.02-2
4,5/5,9	48.312.015.04-2

VIEW COMPONENTS



INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
2	62.303.015.02-2
3	62.303.015.03-2
4	62.303.015.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
OO16

LIST OF COMPATIBILITIES **AVAILABLE**

MIS

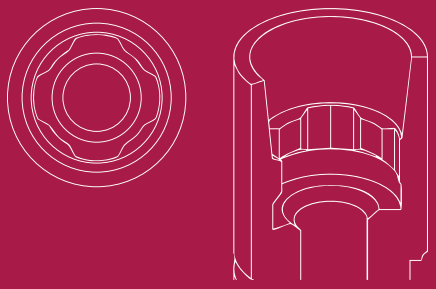

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,8	45°	28°	31.322.016.01-2	31.312.016.01-2
1,5	25°	25°	31.322.016.02-2	31.312.016.02-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1.5	25°	25°	15°	-	31.312.016.22-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.106.01-2		
10	52.410.106.01-2	50.312.016.01-2	43.621.410.01-2
		50.312.016.04-2	43.624.410.01-2
12	52.412.106.01-2	(IG=3mm)	



LAB SCANBODY
30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	25°	33.360.754.01-2	34.612.016.01-2
4		33.460.754.01-2	
6		33.660.754.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.016.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.071.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.05-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	ENGAGING
1	42.302.016.01-2
2	42.302.016.02-2
3	42.302.016.03-2
4	42.302.016.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	NON ENGAGING
2,5/3,9	48.312.016.02-2
3,5/4,9	48.312.016.03-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
0017

LIST OF COMPATIBILITIES **AVAILABLE**

MIS

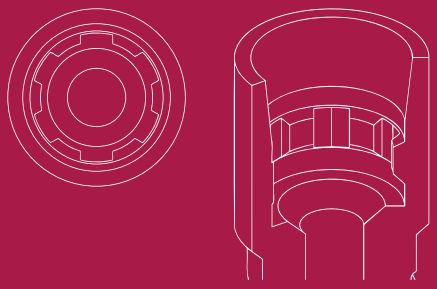

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,7	45°	24°	31.323.017.01-2	31.313.017.01-2
1,5	25°	15°	31.323.017.02-2	31.313.017.02-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,7	30°	25°	15°	31.323.017.21-2	31.313.017.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2	50.313.017.04-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
10	52.410.101.01-2		
12	52.412.101.01-2		



LAB SCANBODY
30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	30°	33.360.756.01-2	34.613.017.01-2
4		33.460.756.01-2	
6		33.660.756.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.017.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.317.073.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.317.005.01-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	ENGAGING
2	42.303.017.02-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	NON ENGAGING
2,5/3,9	48.312.017.02-2
3,5/4,9	48.312.017.03-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
OO18

LIST OF COMPATIBILITIES **AVAILABLE**

MIS

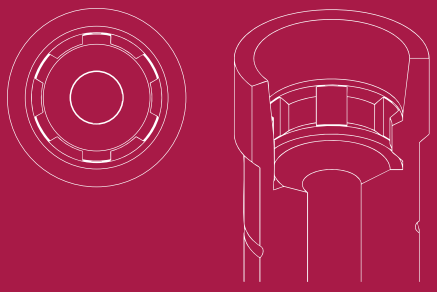

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,2	39°	18°	31.324.018.01-2	31.314.018.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.102.01-2	50.314.018.01-2	43.621.410.01-2
12	52.412.102.01-2		43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.360.756.01-2
4		33.460.756.01-2
6		33.660.756.01-2

ANALOG

DIGITAL ANALOG
34.614.018.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.317.073.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.317.005.01-2	Hex. 1.27	43.625.105.01-2




COMPATIBLE WITH

OO19

LIST OF COMPATIBILITIES **AVAILABLE**

MIS

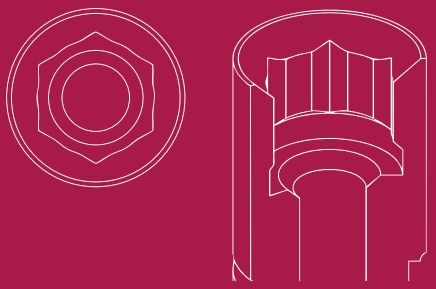

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,8	45°	30°	31.322.019.01-2	31.312.019.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.105.01-2	50.312.019.01-2	43.621.410.01-2
12	52.412.105.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.360.754.01-2
4		33.460.754.01-2
6		33.660.754.01-2

ANALOG

DIGITAL ANALOG
34.612.019.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.071.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.05-2	Hex. 1.27	43.625.105.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	ENGAGING
1	42.302.019.01-2

VIEW COMPONENTS



COMPATIBLE WITH
OO2O

LIST OF COMPATIBILITIES **AVAILABLE**

MIS



STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	45°	30°	31.323.020.01-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.112.01-2	50.313.020.01-2	43.620.411.01-2



LAB SCANBODY
30.413.005.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2

ANALOG

DIGITAL ANALOG
34.613.020.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.020.31-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



CAPS	HEIGHT	TYPE
49.418.000.01-2	3,8	Regular
49.418.000.02-2	3,8	Wide
49.419.000.01-2	6	Regular
49.419.000.02-2	6	Wide
49.420.000.01-2	8	Regular
49.420.000.02-2	8	Wide

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.044.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.06-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OO21

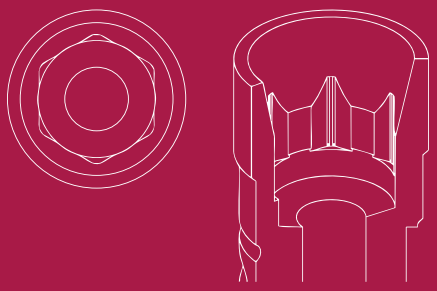

LIST OF COMPATIBILITIES **AVAILABLE**

ADIN - ALFA-GATE - BIONER - CONEXÃO SISTEMA DE PRÓTESE - HAHN IMPLANT (GLIDEWELL) - HI-TEC IMPLANT DIRECT - NOBEL BIOCARE - REFLECT - YOUSE IMPLANTS (SWEDEN & MARTINA GROUP)

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,5	43°	24°	31.322.021.01-2	31.312.021.01-2
2	25°	20°	31.322.021.02-2	31.312.021.02-2
3	20°	30°	31.322.021.03-2	31.312.021.03-2
4	15°	30°	31.322.021.04-2	31.312.021.04-2
5	15°	20°	31.322.021.05-2	31.312.021.05-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1,5	25°	20°	10°	31.322.021.21-2	31.312.021.21-2
3	25°	20°	15°	31.322.021.23-2	31.312.021.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.312.021.03-2 (IG=3mm)	43.621.410.01-2
12	52.412.103.01-2		43.624.410.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.021.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.335.754.01-2
4		33.435.754.01-2
6		33.635.754.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.612.021.01-2	34.612.021.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.021.21-2	49.414.000.01-2	6	A	43.625.108.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.316.073.01-2	41.316.108.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.008.02-2	UNIGRIP	43.625.108.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.021.01-2
2	42.302.021.02-2
3	42.302.021.03-2
4	42.302.021.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	NON ENGAGING
1,5/2,9	48.312.021.01-2
2,5/3,9	48.312.021.02-2
4,5/5,9	48.312.021.04-2

VIEW COMPONENTS

ANGULATED MULTI-UNIT 28°

GH (mm)	NON ENGAGING
3,5/5,4	48.612.021.03-2
4,5/6,4	48.612.021.04-2

VIEW COMPONENTS



INTERNAL MULTI-UNIT


GH (mm)	ENGAGING
2	62.302.021.02-2
3	62.302.021.03-2
4	62.302.021.04-2

VIEW COMPONENTS



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
OO22

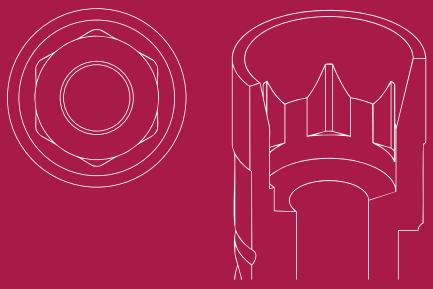

LIST OF COMPATIBILITIES **AVAILABLE**

ADIN - ALFA-GATE - HAHN IMPLANT (GLIDEWELL) - HI-TEC - IMPLANT DIRECT - JDENTALCARE - NOBEL BIOCARE REFLECT - YOUSE IMPLANTS (SWEDEN & MARTINA GROUP)

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,3	40°	19°	31.323.022.01-2	31.313.022.01-2
2	25°	14°	31.323.022.02-2	31.313.022.02-2
3	20°	30°	31.323.022.03-2	31.313.022.03-2
4	15°	30°	31.323.022.04-2	31.313.022.04-2
5	15°	20°	31.323.022.05-2	31.313.022.05-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1,3	30°	25°	10°	31.323.022.21-2	31.313.022.21-2
3	20°	20°	10°	31.323.022.23-2	31.313.022.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2		
10	52.410.101.01-2	50.313.022.01-2	43.621.410.01-2
12	52.412.101.01-2	50.313.022.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.022.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.335.758.01-2
4		33.435.758.01-2
6		33.635.758.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.613.022.01-2	34.613.022.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.022.21-2	49.414.000.01-2	6	A	43.625.108.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.320.075.01-2	41.320.117.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.008.02-2	UNIGRIP	43.625.108.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.022.01-2
2	42.303.022.02-2
3	42.303.022.03-2
4	42.303.022.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	NON ENGAGING
1,5/2,9	48.312.022.01-2
2,5/3,9	48.312.022.02-2

VIEW COMPONENTS

ANGULATED MULTI-UNIT 28°

GH (mm)	NON ENGAGING
3,5/5,4	48.612.022.03-2
4,5/6,4	48.612.022.04-2

VIEW COMPONENTS



INTERNAL MULTI-UNIT


GH (mm)	ENGAGING
2	62.303.022.02-2
3	62.303.022.03-2
4	62.303.022.04-2

VIEW COMPONENTS



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{d} - Direct to implant maximum angulation

COMPATIBLE WITH
OO23

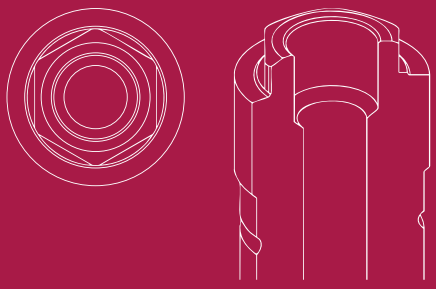

LIST OF COMPATIBILITIES **AVAILABLE**

ACE - AVINENT - BIOGENESIS - BIOHORIZONS - DENTIS - DIO IMPLANTS - ELITE MEDICA - GT MEDICAL - KLOCKNER MEGAGEN - NEOBIOTECH - NOBEL BIOCARE - OSSTEM IMPLANT - RADHEX - STERI-OSS - TBR - TREE-OSS

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	30°	31.322.023.01-2	31.312.023.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.312.023.01-2	43.621.410.01-2
12	52.412.103.01-2		43.624.410.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.023.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.390.805.01-2
4		33.490.805.01-2
6		33.690.805.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.612.023.01-2	34.612.023.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.059.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.008.01-2	UNIGRIP	43.625.108.01-2



COMPATIBLE WITH
OO24

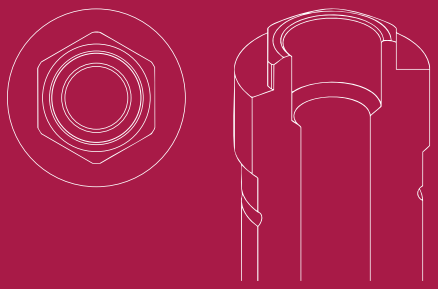

LIST OF COMPATIBILITIES **AVAILABLE**

ACE - ANTHOGYR - AVINENT - BIOGENESIS - B&W - BIOMET 3i - BIONER - BTI - BTK - DENTIS - DIO IMPLANTS - EASY IMPLANT - ECKERMANN
ELITE MEDICA - DSP BIOMEDICAL - EUROTEKNIKA - GALIMPLANT - GMI (ILERIMPLANT) - GT MEDICAL - INTRA-LOCK - KEYSTONE - KLOCKNER - LEADER - MEGAGEN
MICRODENT - MIS - MOZO-GRAU (TICARE) - MPI - NEODENT - NOBEL BIOCARE - NORMON - OSSTEM IMPLANT - OSTEOPLUS - OXY - PHIBO - PROCLINIC
RADHEX - SIGNO VINCES - SIN IMPLANTS - SOUTHERN IMPLANTS SOLUTIONS - STERNGOLD - SYTHEX - TREE-OSS - TRINON - ZIACOM

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	30°	31.323.024.01-2	31.313.024.01-2
0,5	30°	30°	31.323.024.02-2	31.313.024.02-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,3	30°	25°	10°	31.323.024.21-2	31.313.024.21-2
0,5	30°	25°	10°	31.323.024.22-2	31.313.024.22-2
1	30°	25°	10°	31.323.024.23-2	31.313.024.23-2
2	30°	25°	10°	31.323.024.24-2	31.313.024.24-2
3	25°	20°	15°	31.323.024.25-2	31.313.024.25-2
4	25°	20°	15°	31.323.024.26-2	31.313.024.26-2



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.024.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.613.024.01-2	34.613.024.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.024.21-2	49.414.000.01-2	6	A	43.625.108.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.060.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.008.01-2	UNIGRIP	43.625.108.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
2	42.303.024.02-2
3	42.303.024.03-2


VIEW COMPONENTS



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

OO25

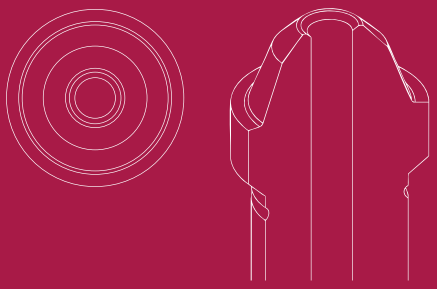

LIST OF COMPATIBILITIES **AVAILABLE**

AB - ACE - ADIN - AVINENT - BIOHORIZONS - BIOMET 3i - BIONER - CORTEX - DENTIS - EASY IMPLANT - EUROTEKNIKA - GALIMPLANT - GMI (ILERIMPLANT)
HAHN IMPLANT (GLIDEWELL) - IMPLANTSWISS - JDENTALCARE - MEDENTIS - MEDENTIKA - MEGAGEN - MONOIMPLANT - NEOBIOTECH
NEODENT - NOBEL BIOCARE - OSSTEM IMPLANT - SEWON MEDIX - SIN IMPLANTS - SOUTHERN IMPLANTS - TREE-OSS - WIN

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	30°	31.323.025.01-2	-



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,3	30°	25°	10°	31.323.025.21-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.112.01-2	50.313.025.02-2	43.620.411.01-2
10	52.410.111.01-2	50.313.025.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY	MINI SCANBODY	SCANALOG
30.413.005.01-2	53.413.025.01-2	23.413.025.01-2 23.313.025.01-2 (Titanium)



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.613.025.01-2	34.613.025.01-2



SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.025.31-2	49.414.000.01-2	6	A	43.625.108.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	

CAPS	HEIGHT	TYPE
49.418.000.01-2	3,8	Regular
49.418.000.02-2	3,8	Wide
49.419.000.01-2	6	Regular
49.419.000.02-2	6	Wide
49.420.000.01-2	8	Regular
49.420.000.02-2	8	Wide



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS


DYNAMIC SCREW	DYNAMIC SCREW Ø2,6	LENGTH	SCREWDRIVER
41.314.039.01-2	41.314.050.31-2 (Temporary or Zirconio Direct MU)	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.008.01-2	UNIGRIP	43.625.108.01-2



COMPATIBLE WITH
OO26

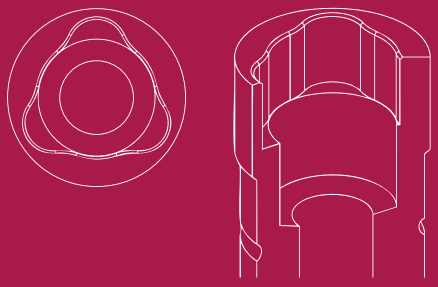

LIST OF COMPATIBILITIES **AVAILABLE**

ACE - IMPLANT DIRECT - NOBEL BIOCARE - SOUTHERN IMPLANTS - TREE-OSS

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	29°	31.322.026.01-2	31.312.026.01-2
1,2	25°	22°	31.322.026.02-2	31.312.026.02-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,5	25°	20°	10°	31.322.026.21-2	31.312.026.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.108.01-2	50.312.026.04-2 (IG=3mm)	43.621.410.01-2
12	52.412.108.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.390.805.01-2
4		33.490.805.01-2
6		33.690.805.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.612.026.01-2	34.612.026.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.026.21-2	49.414.000.01-2	6	A	43.625.108.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.075.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.008.01-2	UNIGRIP	43.625.108.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OO27

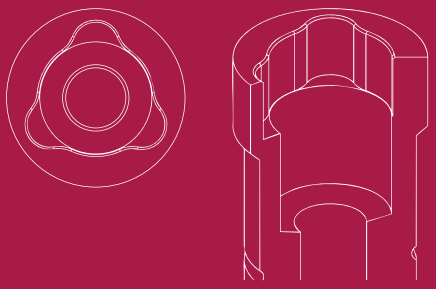

LIST OF COMPATIBILITIES **AVAILABLE**

ACE - IMPLANT DIRECT - NOBEL BIOCARE - SOUTHERN IMPLANTS - TREE-OSS

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	35°	29°	31.323.027.01-2	31.313.027.01-2
1,2	25°	22°	31.323.027.02-2	31.313.027.02-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,3	25°	20°	10°	31.323.027.21-2	31.313.027.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.109.01-2	50.313.027.01-2	43.621.410.01-2
12	52.412.109.01-2		43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.958.01-2
4		33.490.958.01-2
6		33.690.958.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.613.027.01-2	34.613.027.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.027.21-2	49.414.000.01-2	6	A	43.625.108.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.090.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.008.03-2	UNIGRIP	43.625.108.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OO28

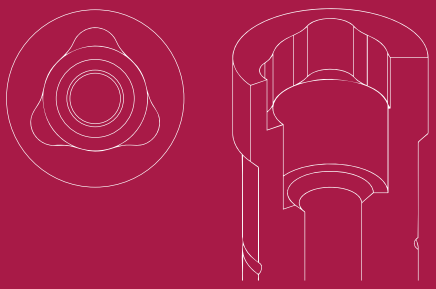

LIST OF COMPATIBILITIES **AVAILABLE**

ACE - IMPLANT DIRECT - NOBEL BIOCARE - SOUTHERN IMPLANTS - TREE-OSS

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	35°	30°	31.324.028.01-2	31.314.028.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.109.01-2	50.314.028.01-2	43.621.410.01-2
12	52.412.109.01-2		43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.958.01-2
4		33.490.958.01-2
6		33.690.958.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.614.028.01-2	34.614.028.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.028.21-2	49.414.000.01-2	6	A	43.625.108.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.090.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.008.03-2	UNIGRIP	43.625.108.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OO29

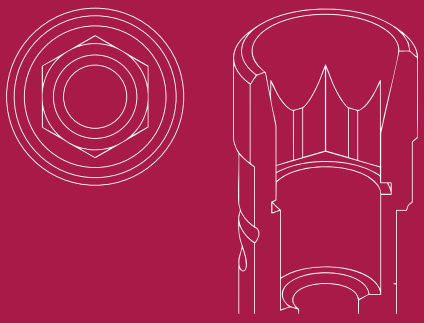

LIST OF COMPATIBILITIES **AVAILABLE**

BIOCONCEPT - BTK - HIOSSEN - NEOBIOTECH - OSSTEM IMPLANT - SEWON MEDIX

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,2	30°	23°	31.322.029.01-2	31.312.029.01-2
2	25°	15°	31.322.029.02-2	31.312.029.02-2
3	20°	25°	31.322.029.03-2	31.312.029.03-2
4	15°	25°	31.322.029.04-2	31.312.029.04-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1,2	25°	20°	20°	31.322.029.21-2	31.312.029.21-2
2	25°	20°	15°	-	31.312.029.22-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.312.029.01-2	43.621.410.01-2
12	52.412.103.01-2	50.312.029.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.029.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	20°	33.345.804.01-2	34.613.029.01-2
4		33.445.804.01-2	
6		33.645.804.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.029.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.316.094.01-2	41.316.132.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.003.02-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.029.01-2
2	42.302.029.02-2
3	42.302.029.03-2
4	42.302.029.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	NON ENGAGING
2,5/3,9	48.312.029.02-2
3,5/4,9	48.312.029.03-2
4,5/5,9	48.312.029.04-2

VIEW COMPONENTS



INTERNAL MULTI-UNIT


GH (mm)	ENGAGING
2	62.302.029.02-2
4	62.302.029.04-2

VIEW COMPONENTS



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
0030

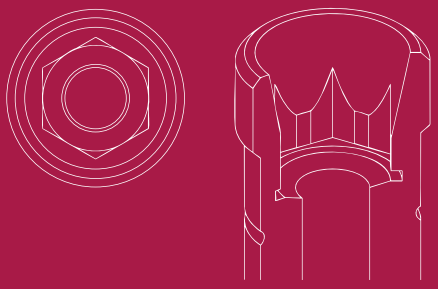

LIST OF COMPATIBILITIES **AVAILABLE**

BIOCONCEPT - BIOTEM - COWELLMEDI - DENTEM - DENTIS - DENTIUM - DIO IMPLANTS - EASY IMPLANT
F&B IMPLANT (FIT & BRILLIANT) - HIOSSEN - IBS - IDO IMPLANTS - IMPLANTSWISS - KUWOTECH - MEGAGEN
NEOBIOTECH - OSSTEM IMPLANT - POINT IMPLANT - SEWON MEDIX - STARK IMPLANTS - YES IMPLANT

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,1	42°	25°	31.323.030.01-2	31.313.030.01-2
2	25°	15°	31.323.030.02-2	31.313.030.02-2
3	20°	30°	31.323.030.03-2	31.313.030.03-2
4	15°	30°	31.323.030.04-2	31.313.030.04-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1,1	25°	20°	10°	31.323.030.21-2	31.313.030.21-2
2	25°	20°	15°	31.323.030.22-2	31.313.030.22-2
3	25°	20°	10°	31.323.030.23-2	31.313.030.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2		
10	52.410.101.01-2	50.313.030.01-2	43.621.410.01-2
		50.313.030.03-2 (IG=3mm)	43.624.410.01-2
12	52.412.101.01-2		



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.030.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S = Standard maximum angulation α_C = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	30°	33.345.808.01-2	34.613.030.01-2
4		33.445.808.01-2	
6		33.645.808.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.030.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.320.079.01-2	41.320.125.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.003.04-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S = Standard maximum angulation α_C = Standard maximum angulation α_{di} = Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.030.01-2
2	42.303.030.02-2
3	42.303.030.03-2
4	42.303.030.04-2
5	42.303.030.05-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
1,5/2,9	48.312.030.01-2
2,5/3,9	48.312.030.02-2
3,5/4,9	48.312.030.03-2
4,5/5,9	48.312.030.04-2

VIEW COMPONENTS



INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
2	62.303.030.02-2
3	62.303.030.03-2
4	62.303.030.04-2

VIEW COMPONENTS





LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OO33

LIST OF COMPATIBILITIES **AVAILABLE**

BIOCONCEPT - IHDE DENTAL (IMBIODENT) - STRAUMANN





STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,3	38°	18°	31.322.033.01-2	31.312.033.01-2
2	20°	14°	31.322.033.02-2	31.312.033.02-2
3	15°	25°	31.322.033.03-2	31.312.033.03-2
4	15°	25°	31.322.033.04-2	31.312.033.04-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1,3	25°	20°	10°	31.322.033.21-2	31.312.033.21-2
3	20°	15°	10°	31.322.033.23-2	31.312.033.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.106.01-2		
10	52.410.106.01-2	50.312.033.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
12	52.412.106.01-2		



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.033.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3	25°	33.315.804.01-2	22.612.033.01-2	34.612.033.01-2
4		33.415.804.01-2		
6		33.615.804.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.033.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.316.078.01-2	41.316.124.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.01-2	TORX T6	43.601.107.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.033.01-2
2	42.302.033.02-2
3	42.302.033.03-2
4	42.302.033.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
2,5/3,9	48.312.033.02-2
3,5/4,9	48.312.033.03-2
4,5/5,9	48.312.033.04-2

VIEW COMPONENTS



INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
4	62.302.033.04-2

VIEW COMPONENTS





LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OO35

LIST OF COMPATIBILITIES **AVAILABLE**

BIOCONCEPT - IHDE DENTAL (IMBIODENT) - STRAUMANN





STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,1	39°	18°	31.323.035.01-2	31.313.035.01-2
2	20°	14°	31.323.035.02-2	31.313.035.02-2
3	15°	30°	31.323.035.03-2	31.313.035.03-2
4	15°	30°	31.323.035.04-2	31.313.035.04-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=5mm	α_S CH=5mm	NON ENGAGING	ENGAGING
1,1	25°	20°	10°	31.323.035.21-2	31.313.035.21-2
3	20°	15°	10°	31.323.035.23-2	31.313.035.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.107.01-2	50.313.035.01-2	43.621.410.01-2
12	52.412.107.01-2	50.313.035.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.035.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.315.804.01-2
4		33.415.804.01-2
6		33.615.804.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.613.035.01-2	34.613.035.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.035.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.316.078.01-2	41.316.124.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.01-2	TORX T6	43.601.107.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.035.01-2
2	42.303.035.02-2
3	42.303.035.03-2
4	42.303.035.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°


GH (mm)	ENGAGING
2,5/3,9	48.312.035.02-2
3,5/4,9	48.312.035.03-2

VIEW COMPONENTS



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S = Standard maximum angulation α_C = Standard maximum angulation α_{II} = Direct to implant maximum angulation

COMPATIBLE WITH
0037

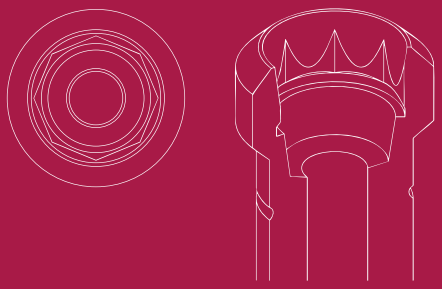

LIST OF COMPATIBILITIES **AVAILABLE**

ACE - ANTHOGYR - BIOCONCEPT - BIOGENESIS - DENTIS - DENTIUM - EUROTEKNIKA - GT MEDICAL - IMPLANT DIRECT MEGAGEN - PROCLINIC - SOUTHERN IMPLANTS - STRAUMANN - TRINON - ZIMMER

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	45°	25°	31.323.037.01-2	31.313.037.01-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,6	30°	25°	15°	31.323.037.21-2	31.313.037.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.110.01-2	50.313.037.04-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
10	52.410.110.01-2		
12	52.412.110.01-2		



LAB SCANBODY	SCANALOG
30.413.004.01-2	23.413.037.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.315.708.01-2
4		33.415.708.01-2
6		33.615.708.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.613.037.01-2	34.613.037.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.037.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.067.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.007.01-2	TORX T6	43.601.107.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.037.01-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
OO38

LIST OF COMPATIBILITIES **AVAILABLE**

XIVE

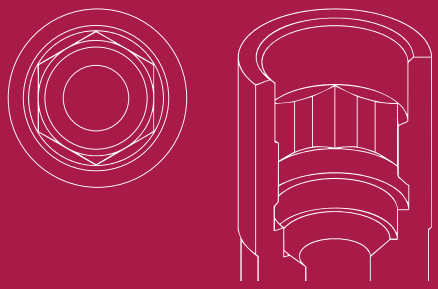

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,7	45°	29°	31.322.038.01-2	31.312.038.01-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,7	30°	25°	10°	31.322.038.21-2	31.312.038.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.312.038.01-2	43.621.410.01-2
12	52.412.103.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.345.804.01-2
4		33.445.804.01-2
6		33.645.804.01-2

ANALOG

DIGITAL ANALOG
34.612.038.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.081.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.004.02-2	Hex. 1.25	43.601.104.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
0039

LIST OF COMPATIBILITIES **AVAILABLE**

SIN IMPLANTS - XIVE

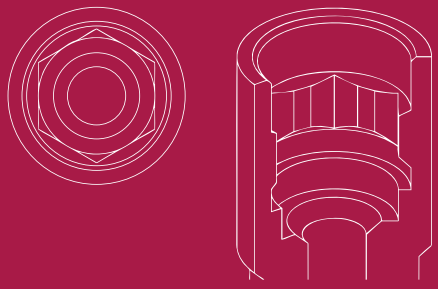

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,7	45°	29°	31.323.039.01-2	31.313.039.01-2
2	25°	-	31.323.039.03-2	31.313.039.03-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,7	30°	25°	10°	31.323.039.21-2	31.313.039.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.114.01-2	50.313.039.01-2	43.621.410.01-2
12	52.412.114.01-2		43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.345.856.01-2
4	25°	33.445.856.01-2
6		33.645.856.01-2

ANALOG

DIGITAL ANALOG
34.613.039.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.081.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.004.02-2	Hex. 1.25	43.601.104.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT


GH (mm)	NON ENGAGING
1	42.303.039.01-2

VIEW COMPONENTS



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OO4O

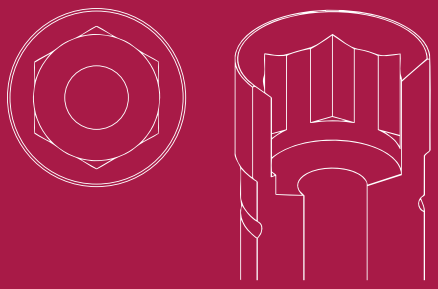

LIST OF COMPATIBILITIES **AVAILABLE**

AB - ACE -ADIN - ALFA-GATE - ALPHABIO - ANCLADEN - ARDS - BIOHORIZONS - BIONER - BIOTEC - BTK - B&W - CORTEX - DITRON
DMI DENTAL SUPPLY - HI-TEC - IMPLANT DIRECT - IMPLANT GENESIS - INTRA-LOCK - JDENTALCARE - LEADER - MIS - NORIS MEDICAL
OSTEOPLUS - PROCLINIC - REFLECT - SOUTHERN IMPLANTS - TREE-OSS - TRI DENTAL IMPLANTS - VULKAN IMPLANTS - ZIMMER

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	45°	30°	31.322.040.01-2	31.312.040.01-2 31.312.042.01-2 (Friction Fit)
1,5	25°	25°	31.322.040.02-2	31.312.040.02-2
3	20°	30°	31.322.040.03-2	31.312.040.03-2
4	15°	30°	31.322.040.04-2	31.312.040.04-2
5	10°	23°	31.322.040.05-2	31.312.040.05-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,6	30°	25°	20°	31.322.040.21-2	31.312.040.21-2
1	30°	25°	20°	31.322.040.29-2	31.312.040.29-2
2	25°	20°	15°	-	31.312.040.28-2
3	25°	20°	15°	31.322.040.23-2	31.312.040.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2	50.312.040.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
10	52.410.101.01-2		
12	52.412.101.01-2		



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.040.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.370.716.01-2
4	25°	33.470.716.01-2
6		33.670.716.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.612.040.01-2	34.612.040.01-2



SCANBODY OP

SCANBODY	PEEK	HEIGHT	TYPE	SCREWDRIVER
54.315.040.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.317.071.01-2	41.317.106.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

STRAIGHT SCREW	TYPE	SCREWDRIVER
40.317.004.01-2	Hex. 1.27	43.601.104.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.040.01-2
2	42.302.040.02-2
3	42.302.040.03-2
4	42.302.040.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
2.5/3.9	48.312.040.02-2
3.5/4.9	48.312.040.03-2
4.5/5.9	48.312.040.04-2

VIEW COMPONENTS



INTERNAL MULTI-UNIT


GH (mm)	NON ENGAGING
4	62.302.040.04-2

VIEW COMPONENTS



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
OO4OB

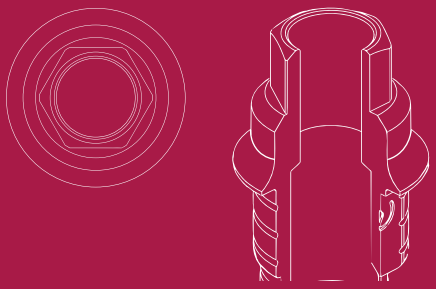

LIST OF COMPATIBILITIES **AVAILABLE**

AVINENT - ECKERMANN - GMI (ILERIMPLANT) - MICRODENT - NORMON - NOVA IMPLANTS - PALTOP - RADHEX - RITTER WIN - ZIACOM

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	45°	30°	31.322.040.01-2	31.312.040.01-2 31.312.042.01-2 (Friction Fit)
1,5	25°	25°	31.322.040.02-2	31.312.040.02-2
3	20°	30°	31.322.040.03-2	31.312.040.03-2
4	15°	30°	31.322.040.04-2	31.312.040.04-2
5	10°	23°	31.322.040.05-2	31.312.040.05-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,6	30°	25°	20°	31.322.040.21-2	31.312.040.21-2
1	30°	25°	20°	31.322.040.29-2	31.312.040.29-2
2	25°	20°	15°	-	31.312.040.28-2
3	25°	20°	15°	31.322.040.23-2	31.312.040.23-2



LAB SCANBODY
30.412.001.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.318.071.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



COMPATIBLE WITH
0041

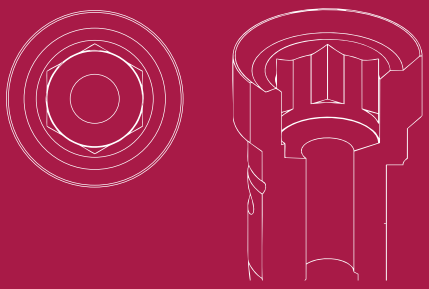

LIST OF COMPATIBILITIES **AVAILABLE**

ACE - BIOHORIZONS - BIONER - DENTAL TECH - HI-TEC - IMPLANT DIRECT - INTRA-LOCK - MISS - PALTOP - REFLECT ZIMMER

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,4	45°	30°	31.323.041.01-2	31.323.041.02-2 31.313.043.01-2 (Friction Fit)
1,5	30°	25°	31.323.041.02-2	31.313.041.02-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,4	30°	20°	10°	31.323.041.21-2	31.313.041.21-2
1,5	30°	25°	15°	31.323.041.22-2	31.313.041.22-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.102.01-2	50.313.041.01-2	43.621.410.01-2
12	52.412.102.01-2	50.313.041.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.041.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.370.716.01-2
4		33.470.716.01-2
6		33.670.716.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.613.041.01-2	34.613.041.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.041.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.317.071.01-2	41.317.106.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.317.004.01-2	Hex. 1.27	43.601.104.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT


STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.041.01-2

VIEW COMPONENTS



COMPATIBLE WITH
OO41B

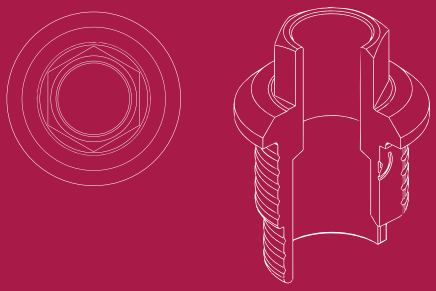

LIST OF COMPATIBILITIES **AVAILABLE**

ECKERMANN - DENTEGRIS - GMI (ILERIMPLANT) - RADHEX

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,4	45°	30°	31.323.041.01-2	31.313.041.01-2
1,5	30°	25°	31.323.041.02-2	31.313.041.02-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,4	30°	20°	10°	31.323.041.21-2	31.313.041.21-2
1,5	30°	25°	15°	31.323.041.22-2	31.313.041.22-2



LAB SCANBODY
30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.370.716.01-2
4		33.470.716.01-2
6		33.670.716.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS


DYNAMIC SCREW	LENTH	SCREWDRIVER
	18	43.618.201.01-2
41.318.071.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



COMPATIBLE WITH
OO44

LIST OF COMPATIBILITIES **AVAILABLE**

KEYSTONE

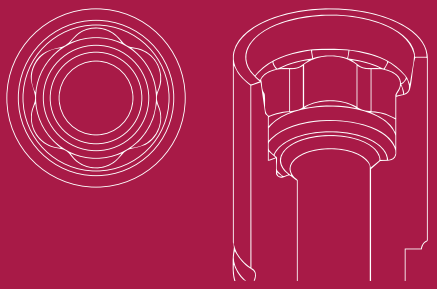

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	42°	23°	31.322.044.01-2	31.312.044.01-2
2	25°	-	31.322.044.02-2	31.312.044.02-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1	25°	20°	10°	31.322.044.21-2	31.312.044.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.105.01-2	50.312.044.01-2	43.621.410.01-2
12	52.412.105.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.390.716.01-2	34.612.044.01-2
4	25°	33.490.716.01-2	
6		33.690.716.01-2	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.318.065.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.003.01-2	Hex. 1.20	43.601.103.02-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OO45

LIST OF COMPATIBILITIES **AVAILABLE**

KEYSTONE

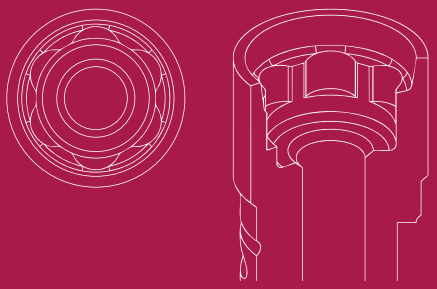

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	43°	22°	31.323.045.01-2	31.313.045.01-2
2	25°	-	31.323.045.02-2	31.313.045.02-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1	25°	20°	10°	31.323.045.21-2	31.313.045.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.118.01-2	50.313.045.01-2	43.621.410.01-2
12	52.412.118.01-2		43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.390.716.01-2	34.613.045.01-2
4	30°	33.490.716.01-2	
6		33.690.716.01-2	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.318.065.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.003.01-2	Hex. 1.20	43.601.103.02-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OO46

LIST OF COMPATIBILITIES **AVAILABLE**

KEYSTONE

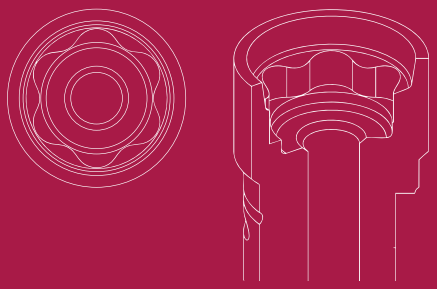

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	42°	21°	31.324.046.01-2	31.314.046.01-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1	30°	20°	10°	31.324.046.21-2	31.314.046.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.125.01-2	50.314.046.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2

ANALOG

DIGITAL ANALOG
34.614.046.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.318.065.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.003.01-2	Hex. 1.20	43.601.103.02-2



COMPATIBLE WITH
OO47

LIST OF COMPATIBILITIES **AVAILABLE**

NEOSS

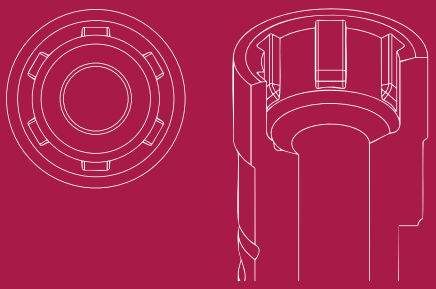

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	45°	30°	31.322.047.01-2	31.312.047.01-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,6	30°	25°	20°	-	31.312.047.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
9	52.409.123.01-2	50.312.047.01-2	43.621.410.01-2 43.624.410.01-2
10	52.410.123.01-2		
12	52.412.123.01-2		



LAB SCANBODY
30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	25°	33.390.716.01-2	34.612.047.01-2
4		33.490.716.01-2	
6		33.690.716.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.047.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.074.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.007.02-2	TORX T6	43.601.107.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

OO48

LIST OF COMPATIBILITIES **AVAILABLE**

NEOSS

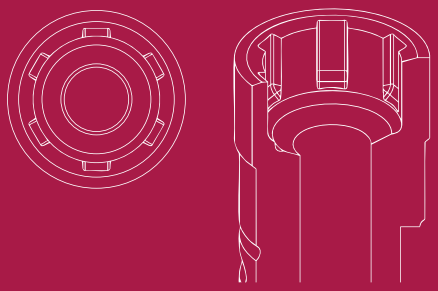

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	45°	30°	31.323.048.01-2	31.313.048.01-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,6	30°	25°	20°	31.323.048.21-2	31.313.048.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
9	52.409.123.01-2	50.312.047.01-2	43.621.410.01-2 43.624.410.01-2
10	52.410.123.01-2		
12	52.412.123.01-2		



LAB SCANBODY
30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.390.716.01-2	34.612.047.01-2
4	30°	33.490.716.01-2	
6		33.690.716.01-2	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.320.074.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.007.02-2	TORX T6	43.601.107.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
0049

LIST OF COMPATIBILITIES **AVAILABLE**

BEGO

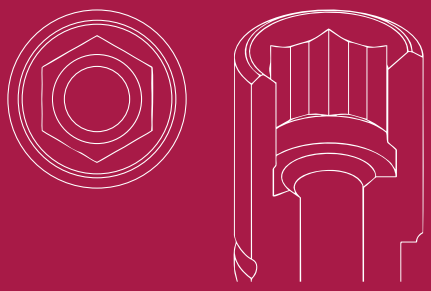

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	45°	30°	31.321.049.01-2	31.311.049.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.116.01-2	50.311.049.01-2	43.621.410.01-2
12	52.412.116.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.325.472.01-2*
4		33.425.472.01-2*
6		33.625.472.01-2*

ANALOG

DIGITAL ANALOG
34.611.049.01-2



* Only for titanium and soft materials

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.314.064.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.004.01-2	Hex. 1.25	43.601.104.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OO5O

LIST OF COMPATIBILITIES **AVAILABLE**

BEGO

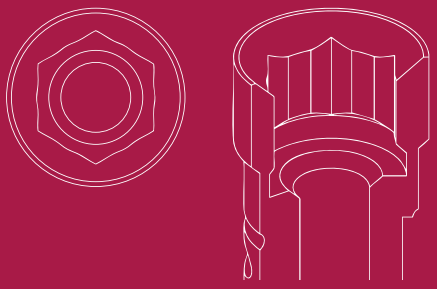

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	27°	31.323.051.01-2	31.313.051.01-2
2	25°	-	31.323.051.03-2	31.313.051.03-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
2	25°	20°	15°	31.323.051.23-2	31.313.051.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.312.050.04-2 (IG=3mm)	43.621.410.01-2
12	52.412.117.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	25°	33.335.676.01-2	34.612.050.01-2
4		33.435.676.01-2	
6		33.635.676.01-2	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.064.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.004.03-2	Hex. 1.25	43.601.104.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.050.01-2
2	42.302.050.02-2


VIEW COMPONENTS



COMPATIBLE WITH
OO51

LIST OF COMPATIBILITIES **AVAILABLE**

BEGO

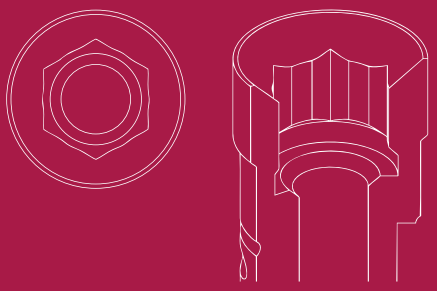

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	25°	31.323.051.01-2	31.313.051.01-2
2	25°	-	31.323.051.03-2	31.313.051.03-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
2	25°	20°	15°	31.323.051.23-2	31.313.051.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.118.01-2	50.313.051.01-2	43.621.410.01-2
12	52.412.118.01-2	50.313.051.04-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.335.676.01-2
4		33.435.676.01-2
6		33.635.676.01-2

ANALOG

DIGITAL ANALOG
34.613.051.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.064.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.004.03-2	Hex. 1.25	43.601.104.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OO52

LIST OF COMPATIBILITIES **AVAILABLE**

BEGO

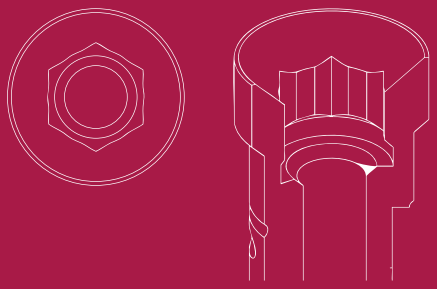

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	27°	31.324.052.01-2	31.314.052.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.102.01-2	50.314.052.04-2 (IG=3mm)	43.621.410.01-2
12	52.412.102.01-2		43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.335.676.01-2
4		33.435.676.01-2
6		33.635.676.01-2

ANALOG

DIGITAL ANALOG
34.614.052.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.318.064.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.004.03-2	Hex. 1.25	43.601.104.01-2



COMPATIBLE WITH
OO54

LIST OF COMPATIBILITIES **AVAILABLE**

KLOCKNER

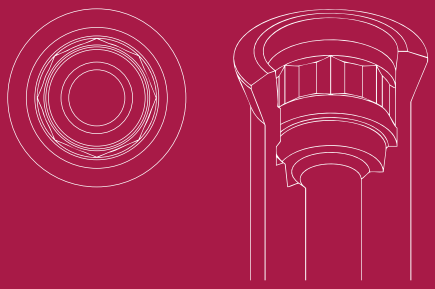

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	45°	25°	31.323.054.01-2	31.313.054.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.119.01-2	50.314.054.01-2	43.621.410.01-2
12	52.412.119.01-2		43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.345.856.01-2
4		33.445.856.01-2
6		33.645.856.01-2

ANALOG

DIGITAL ANALOG
34.614.054.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.067.01-2 41.318.051.02-2 (OCTACONE 12° & PILAR 25°)	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW
40.318.012.01-2



COMPATIBLE WITH
OO57

LIST OF COMPATIBILITIES **AVAILABLE**

BIOMET 3i

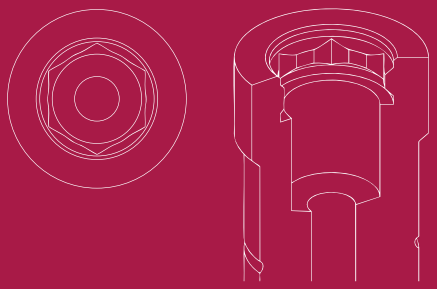

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	27°	31.324.057.01-2	31.314.057.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2	50.314.057.01-2	43.621.410.01-2 43.624.410.01-2
10	52.410.101.01-2		
12	52.412.101.01-2		



LAB SCANBODY
30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.805.01-2
4		33.490.805.01-2
6		33.690.805.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.614.057.01-2	34.614.057.01 -2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.084.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.003.01-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

OO58

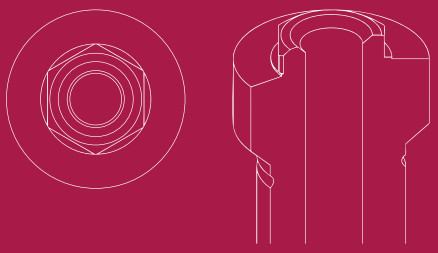

LIST OF COMPATIBILITIES **AVAILABLE**

ACE - ANTHOGYR - B&W - BIOGENESIS - BIOMET 3i - BIONER - EASY IMPLANT - LEADER - MEGAGEN - MICRODENT
MIS - MPI - OSSTEM IMPLANT - PROCLINIC - SIN IMPLANTS - SOUTHERN IMPLANTS - TBR

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	30°	31.324.058.01-2	31.314.058.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.118.01-2	50.314.058.01-2	43.621.410.01-2
12	52.412.118.01-2		43.624.410.01-2



LAB SCANBODY
30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.614.058.01-2	34.614.058.01 -2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.320.047.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.003.02-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OO59

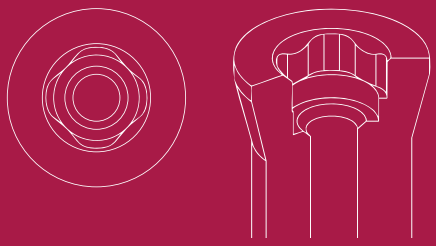

LIST OF COMPATIBILITIES **AVAILABLE**

BTI

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,7	45°	27°	31.324.059.01-2	31.314.059.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.115.01-2	50.313.010.01-2	43.621.410.01-2
12	52.412.115.01-2	50.313.010.04-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY
30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2

ANALOG

ANALOG
22.614.059.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S = Standard maximum angulation α_C = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.065.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.003.01-2	Hex. 1.20	43.601.103.02-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
0060

LIST OF COMPATIBILITIES **AVAILABLE**

BTI

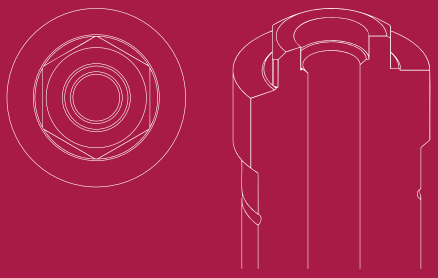

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	30°	31.324.060.01-2	31.314.060.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.122.01-2	50.314.060.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY
30.415.007.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.614.060.01-2	34.614.060.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.060.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.003.02-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OO61

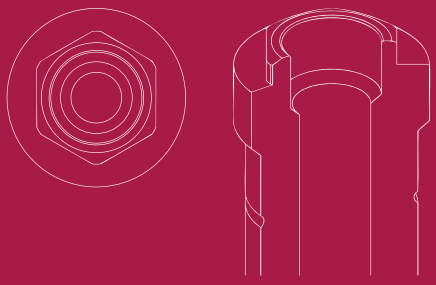

LIST OF COMPATIBILITIES **AVAILABLE**

AVINENT - COWELLMEDI - DENTIS - DIO IMPLANTS - ELITE MEDICA - GMI (ILERIMPLANT) - GT MEDICAL - KEYSTONE KLOCKNER - MOZO-GRAU (TICARE) - NOBEL BIOCARE - OSSTEM IMPLANT - TREE-OSS

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	45°	30°	31.324.061.01-2	31.314.061.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.125.01-2	50.314.061.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY
30.415.007.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.958.01-2
4		33.490.958.01-2
6		33.690.958.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.614.061.01-2	34.614.061.01 -2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.325.067.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.325.008.01-2	UNIGRIP	43.625.108.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

OO66

LIST OF COMPATIBILITIES **AVAILABLE**

ASTRA

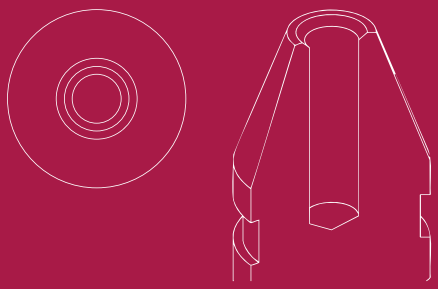

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	45°	30°	31.323.066.01-2	-



LAB SCANBODY
30.412.001.01-2



ANALOG

ANALOG
22.613.066.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.039.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.008.01-2	UNIGRIP	43.625.108.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
OO74



LIST OF COMPATIBILITIES **AVAILABLE**

ANTHOGYR - DENTIUM - DENTIS - DIO IMPLANTS - EUROTEKNIKA - GT MEDICAL - IMPLANT DIRECT - MEGAGEN - PROCLINIC - STRAUMANN - TRINON - ZIMMER

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	45°	30°	31.323.074.01-2	31.313.074.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.110.01-2	50.313.074.01-2	43.621.410.01-2 43.624.410.01-2
10	52.410.110.01-2		
12	52.412.110.01-2		



LAB SCANBODY	SCANALOG
30.415.007.01-2	23.413.074.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.330.708.01-2
4		33.430.708.01-2
6		33.630.708.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.613.074.01-2	34.613.074.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.074.31-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



CAPS	HEIGHT	TYPE
49.418.000.01-2	3,8	Regular
49.418.000.02-2	3,8	Wide
49.419.000.01-2	6	Regular
49.419.000.02-2	6	Wide
49.420.000.01-2	8	Regular
49.420.000.02-2	8	Wide

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.044.01-2 41.320.050.01-2 (IMPLANT DIRECT)	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.007.04-2	TORX T6	43.601.107.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
OO75

LIST OF COMPATIBILITIES **AVAILABLE**

ANKLYOS

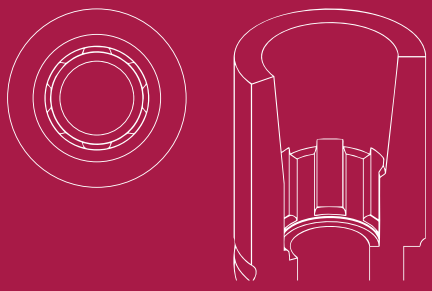

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	42°	24°	31.322.075.01-2	-
2	20°	15°	31.322.075.02-2	31.312.075.02-2
3	20°	-	31.322.075.03-2	31.312.075.03-2
4	15°	-	31.322.075.04-2	31.312.075.04-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1	30°	20°	15°	31.322.075.21-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.105.01-2	50.312.075.03-2 (IG=3mm)	43.621.410.01-2
12	52.412.105.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.330.734.01-2
4		33.430.734.01-2
6		33.630.734.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.612.075.01-2	34.612.075.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE
54.315.075.21-2	49.414.000.01-2	6	A
	49.415.000.01-2	9	A
	49.416.000.01-2	13	A
	49.414.000.02-2	6	B
	49.415.000.02-2	9	B
	49.416.000.02-2	13	B
	49.414.000.03-2	6	C
	49.415.000.03-2	9	C
	49.416.000.03-2	13	C
	49.416.000.04-2	13	D
	49.416.000.05-2	13	E



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.077.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW
40.318.013.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	ENGAGING
2	42.302.075.02-2
3	42.302.075.03-2
4	42.302.075.04-2

VIEW COMPONENTS



INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
3	62.302.075.03-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

OO8O

LIST OF COMPATIBILITIES **AVAILABLE**

BIOHORIZONS - ZIMMER

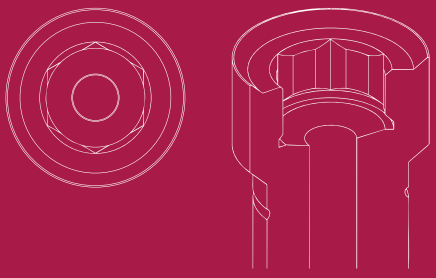

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,4	45°	30°	31.324.080.01-2	31.314.080.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.124.01-2	50.314.080.01-2	43.621.410.01-2
12	52.412.124.01-2		43.624.410.01-2



LAB SCANBODY
30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.370.716.01-2
4		33.470.716.01-2
6		33.670.716.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.614.080.01-2	34.614.080.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.080.21-2	49.414.000.01-2	6	A	43.601.104.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2		C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.317.071.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.317.004.01-2	Hex. 1.27	43.601.104.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{id} - Direct to implant maximum angulation

COMPATIBLE WITH
OO81

LIST OF COMPATIBILITIES **AVAILABLE**

BEGO

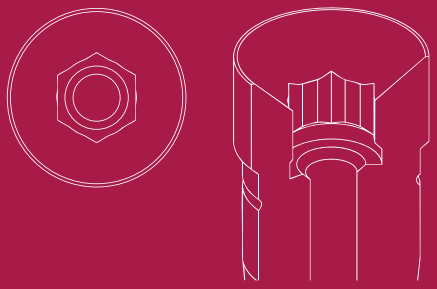

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,4	41°	18°	31.325.081.01-2	31.315.081.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.126.01-2	50.315.081.01-2	43.621.410.01-2
12	52.412.126.01-2		43.624.410.01-2



LAB SCANBODY
30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.335.676.01-2
4		33.435.676.01-2
6		33.635.676.01-2

ANALOG

DIGITAL ANALOG
34.615.081.01 -2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.318.064.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.004.03-2	Hex. 1.25	43.601.104.01-2



COMPATIBLE WITH
OO82

LIST OF COMPATIBILITIES **AVAILABLE**

KLOCKNER

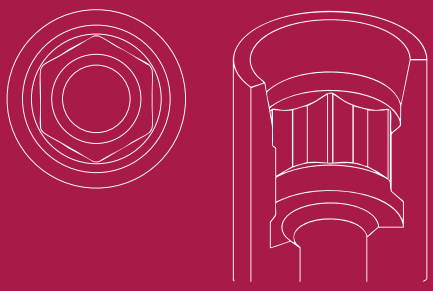

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,2	45°	25°	31.322.082.01-2	31.312.082.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.105.01-2	50.312.082.01-2	43.621.410.01-2
12	52.412.105.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.345.804.01-2
4		33.445.804.01-2
6		33.645.804.01-2

ANALOG

DIGITAL ANALOG
34.612.082.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.074.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW
40.316.012.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.082.01-2
2	42.302.082.02-2
3	42.302.082.03-2
4	42.302.082.04-2


VIEW COMPONENTS



COMPATIBLE WITH
OO83

LIST OF COMPATIBILITIES **AVAILABLE**

KLOCKNER

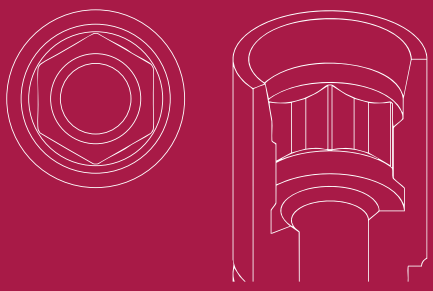

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,2	45°	25°	31.323.083.01-2	31.313.083.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.313.083.01-2	43.621.410.01-2
12	52.412.103.01-2		43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.345.856.01-2
4		33.445.856.01-2
6		33.645.856.01-2

ANALOG

DIGITAL ANALOG
34.613.083.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.076.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW
40.318.012.02-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.083.01-2
2	42.303.083.02-2
3	42.303.083.03-2
4	42.303.083.04-2

VIEW COMPONENTS




COMPATIBLE WITH

OO84

LIST OF COMPATIBILITIES **AVAILABLE**

XIVE

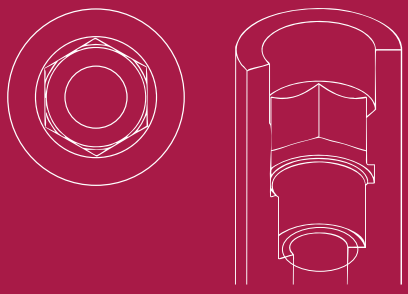

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	40°	-	31.321.084.01-2	31.311.084.01-2



LAB SCANBODY
30.410.006.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.076.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.003.03-2	Hex. 1.20	43.601.103.02-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
OO85

LIST OF COMPATIBILITIES **AVAILABLE**

XIVE

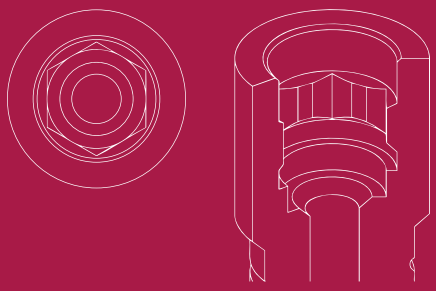

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	30°	31.324.085.01-2	31.314.085.01-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,3	30°	25°	20°	-	31.314.085.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.314.085.01-2	43.621.410.01-2
12	52.412.117.01-2		43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.345.856.01-2	34.614.085.01-2
4	25°	33.445.856.01-2	
6		33.645.856.01-2	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.081.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.004.02-2	Hex. 1.25	43.601.104.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

OO86

LIST OF COMPATIBILITIES **AVAILABLE**

XIVE

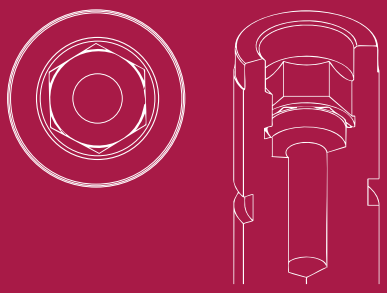

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	45°	-	31.325.086.01-2	31.315.086.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.314.085.01-2	43.621.410.01-2
12	52.412.117.01-2		43.624.410.01-2



LAB SCANBODY
30.415.007.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.345.856.01-2
4		33.445.856.01-2
6		33.645.856.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.081.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.004.02-2	Hex. 1.25	43.601.104.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

OO87

LIST OF COMPATIBILITIES **AVAILABLE**

CAMLOG

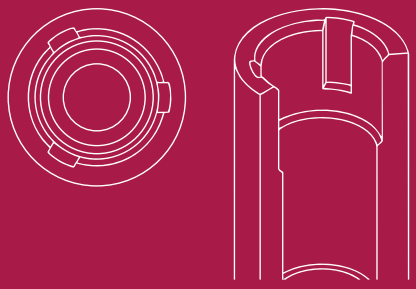

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	25°	-	31.321.087.01-2	31.311.087.01-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,3	20°	20°	15°	-	31.311.087.21-2
2	25°	20°	15°	-	31.311.087.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.132.01-2	50.311.087.04-2 (IG=3mm)	43.621.415.01-2
12	52.412.132.01-2		



LAB SCANBODY
30.410.006.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.087.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.094.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.04-2	Hex. 1.27	43.625.105.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

OO88

LIST OF COMPATIBILITIES **AVAILABLE**

CAMLOG

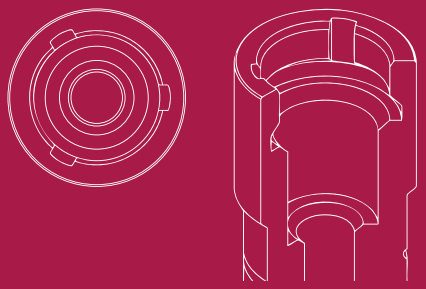

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	25°	-	31.324.088.01-2	31.314.088.01-2



LAB SCANBODY
30.414.003.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.088.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.320.094.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.005.04-2	Hex. 1.27	43.625.105.01-2




COMPATIBLE WITH

OO9O

LIST OF COMPATIBILITIES **AVAILABLE**

ASTRA

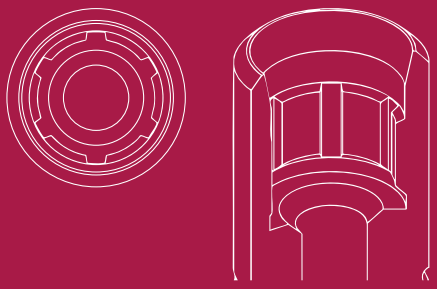

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	45°	24°	31.321.090.01-2	31.311.090.01-2
2	25°	-	31.321.090.02-2	31.311.090.02-2
3	20°	-	31.321.090.03-2	31.311.090.03-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1	30°	25°	15°	-	31.311.090.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.128.01-2	50.311.090.03-2 (IG=3mm)	43.621.415.01-2



LAB SCANBODY
30.410.006.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.325.472.01-2*	34.611.090.01-2
4	25°	33.425.472.01-2*	
6		33.625.472.01-2*	



*Only for R
*Only for titanium and soft materials

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.090.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.074.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.005.01-2	Hex. 1.27	43.625.105.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

OO91

LIST OF COMPATIBILITIES **AVAILABLE**

ASTRA

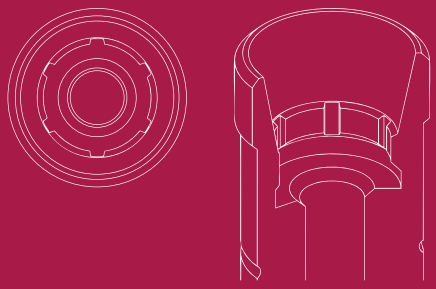

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,2	38°	18°	31.324.091.01-2	31.314.091.01-2
2	25°	-	31.324.091.02-2	31.314.091.02-2
3	20°	25°	31.324.091.03-2	31.314.091.03-2
4	15°	25°	31.324.091.04-2	31.314.091.04-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1,2	30°	25°	15°	-	31.314.091.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.102.01-2	50.314.091.03-2 (IG=3mm)	43.621.410.01-2
12	52.412.102.01-2		43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.958.01-2
4		33.490.958.01-2
6		33.690.958.01-2

ANALOG

DIGITAL ANALOG
34.614.091.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.091.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.320.074.01-2 41.320.082.01-2 (IMPLANT DIRECT)	41.320.129.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.005.01-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	ENGAGING
1	42.303.091.01-2
2	42.303.091.02-2
3	42.303.091.03-2
4	42.303.091.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

OO92

LIST OF COMPATIBILITIES **AVAILABLE**

ASTRA

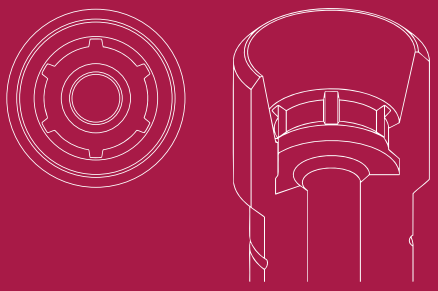

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	45°	25°	31.325.092.01-2	31.315.092.01-2
2	25°	-	31.325.092.02-2	31.315.092.02-2
3	20°	-	31.325.092.03-2	31.315.092.03-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1	30°	25°	15°	-	31.315.092.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.129.01-2	50.315.092.01-2 50.315.092.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY
30.415.007.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	30°	33.390.958.01-2	34.615.092.01-2
4		33.490.958.01-2	
6		33.690.958.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.092.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.320.074.01-2	41.320.129.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.005.01-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

OO96

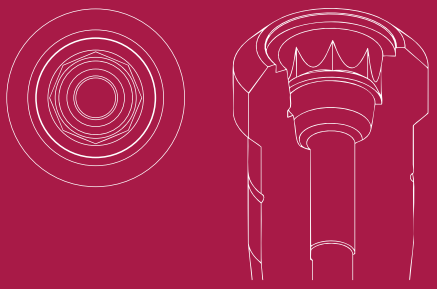

LIST OF COMPATIBILITIES **AVAILABLE**

ACE - ANTHOGYR - DENTIUM - EUROTEKNIKA - IMPLANT DIRECT - PROCLINIC - SOUTHERN IMPLANTS - STRAUMANN

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	45°	30°	31.324.096.01-2	31.314.096.01-2



LAB SCANBODY	SCANALOG
30.414.008.01-2	23.414.096.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.315.708.01-2
4		33.415.708.01-2
6		33.615.708.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.614.096.01-2	34.614.096.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.096.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.067.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.007.01-2	TORX T6	43.601.107.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
0101

LIST OF COMPATIBILITIES **AVAILABLE**

STRAUMANN

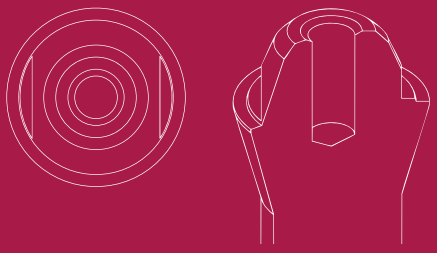

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	30°	31.323.101.01-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
9	52.409.133.01-2	50.313.101.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY	MINI SCANBODY	SCANALOG
30.413.005.01-2	53.413.101.01-2	23.413.101.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.335.676.01-2
4		33.435.676.01-2
6		33.635.676.01-2

ANALOG

DIGITAL ANALOG
34.613.101.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.101.31-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



CAPS	HEIGHT	TYPE
49.418.000.01-2	3,8	Regular
49.418.000.02-2	3,8	Wide
49.419.000.01-2	6	Regular
49.419.000.02-2	6	Wide
49.420.000.01-2	8	Regular
49.420.000.02-2	8	Wide

SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.314.043.01-2	41.314.050.31-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.007.01-2	TORX T6	43.601.107.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
0102

LIST OF COMPATIBILITIES **AVAILABLE**

BIOHORIZONS

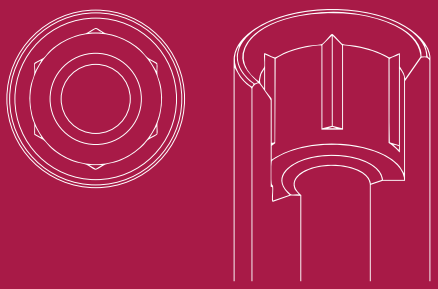

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,8	38°	18°	31.322.102.01-2	31.312.102.01-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1	30°	25°	20°	31.322.102.29-2	31.312.102.29-2
1,8	25°	15°	10°	31.322.102.21-2	31.312.102.21-2
3	20°	20°	15°	31.322.102.23-2	31.312.102.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.128.01-2	50.312.102.03-2 (IG=3mm)	43.621.415.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.102.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	25°	33.345.856.01-2	34.612.102.01-2
4		33.445.856.01-2	
6		33.645.856.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.102.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.317.065.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.317.005.02-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.102.01-2
2	42.302.102.02-2
3	42.302.102.03-2
4	42.302.102.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°


GH (mm)	ENGAGING
2,5/3,9	48.312.102.02-2

VIEW COMPONENTS



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
0109

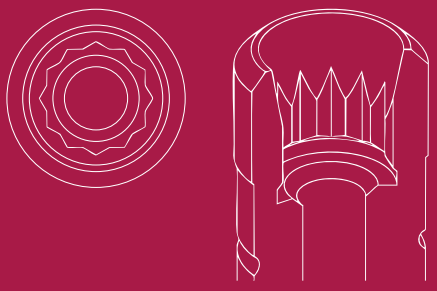

LIST OF COMPATIBILITIES **AVAILABLE**

ASTRA - CORTEX - MOZO-GRAU (TICARE) - SOUTHERN IMPLANTS

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,2	45°	29°	31.322.109.01-2	31.312.109.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.128.01-2	50.312.109.01-2	43.621.415.01-2



LAB SCANBODY
30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.360.754.01-2*
4		33.460.754.01-2*
6		33.660.754.01-2*

*Only for R

ANALOG

DIGITAL ANALOG	ANALOG
34.612.109.01-2	22.612.109.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.314.070.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.005.02-2	Hex. 1.27	43.625.105.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
0110

LIST OF COMPATIBILITIES **AVAILABLE**

BREDENT MEDICAL

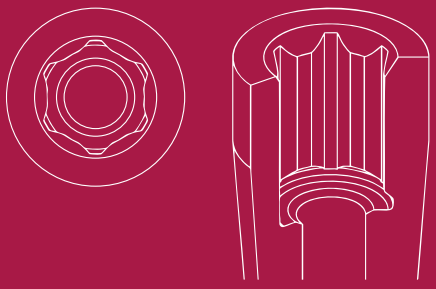

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,4	45°	30°	31.320.110.01-2	31.310.110.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.310.110.04-2 (IG=3mm)	43.621.410.01-2
12	52.412.117.01-2		43.624.410.01-2



LAB SCANBODY
30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	20°	33.360.756.01-2*
4		33.460.756.01-2*
6		33.660.756.01-2*

ANALOG

DIGITAL ANALOG
34.610.110.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S = Standard maximum angulation α_C = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.318.083.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.007.01-2	TORX T6	43.601.107.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O111

LIST OF COMPATIBILITIES **AVAILABLE**

BREDENT MEDICAL

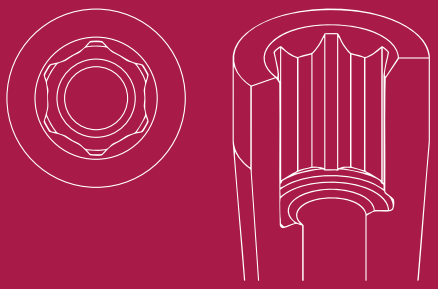

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,4	45°	30°	31.323.111.01-2	31.313.111.01-2
2,5	25°	-	-	31.313.111.03-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.310.110.04-2 (IG=3mm)	43.621.410.01-2
12	52.412.117.01-2		43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	20°	33.360.756.01-2
4		33.460.756.01-2
6		33.660.756.01-2

ANALOG

DIGITAL ANALOG
34.610.110.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.083.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.003.06-2	TORX T6	43.601.107.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.111.01-2
2	42.303.111.02-2
3	42.303.111.03-2
4	42.303.111.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O119

LIST OF COMPATIBILITIES **AVAILABLE**

BIOHORIZONS - CAMLOG

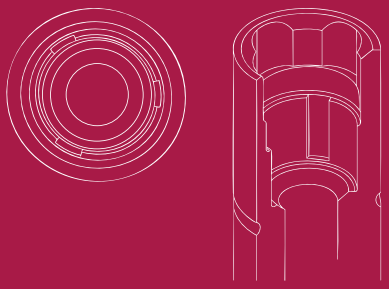

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	35°	-	31.321.119.01-2	31.311.119.01-2
2	30°	-	31.321.119.02-2	31.311.119.02-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.132.01-2	50.311.119.03-2 (IG=3mm)	43.621.415.01-2
12	52.412.132.01-2		



LAB SCANBODY
30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.360.756.01-2
4		33.460.756.01-2
6		33.660.756.01-2

ANALOG

DIGITAL ANALOG
34.611.119.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.119.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.080.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.07-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.301.119.01-2
2	42.301.119.02-2
3	42.301.119.03-2
4	42.301.119.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°


GH (mm)	ENGAGING
3,5/4,9	48.312.119.03-2

VIEW COMPONENTS



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
0120

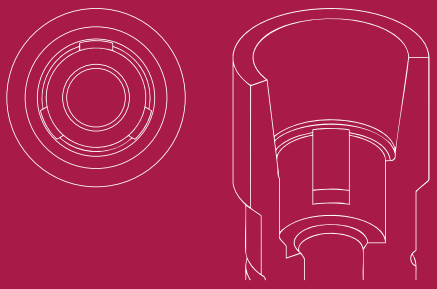

LIST OF COMPATIBILITIES **AVAILABLE**

BIOHORIZONS - CAMLOG

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	45°	25°	31.323.121.01-2	31.313.121.01-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
2	25°	20°	15°	-	31.313.121.22-2
3	25°	20°	10°	-	31.313.121.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.108.01-2	50.312.120.03-2 (IG=3mm)	43.621.410.01-2
12	52.412.108.01-2		43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	20°	33.360.754.01-2	34.612.120.01-2
4		33.460.754.01-2	
6		33.660.754.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.121.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.080.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.07-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.121.01-2
2	42.303.121.02-2
3	42.303.121.03-2
4	42.303.121.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
2,5/3,9	48.312.120.02-2
3,5/4,9	48.312.120.03-2

VIEW COMPONENTS



INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
2	62.303.121.02-2
4	62.303.121.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
O121

LIST OF COMPATIBILITIES **AVAILABLE**

CAMLOG

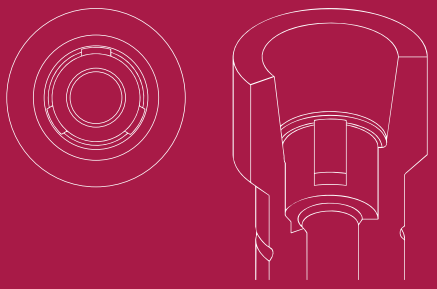

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	45°	25°	31.323.121.01-2	31.313.121.01-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
2	25°	20°	15°	-	31.313.121.22-2
3	25°	20°	10°	-	31.313.121.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.109.01-2	50.313.121.01-2	43.621.410.01-2
12	52.412.109.01-2	50.313.121.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	20°	33.360.754.01-2	34.613.121.01-2
4		33.460.754.01-2	
6		33.660.754.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.121.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.080.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.07-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.121.01-2
2	42.303.121.02-2
3	42.303.121.03-2
4	42.303.121.04-2

VIEW COMPONENTS



INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
2	62.303.121.02-2
4	62.303.121.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
O124

LIST OF COMPATIBILITIES **AVAILABLE**

HAHN IMPLANT (GLIDEWELL) - NOBEL BIOCARE

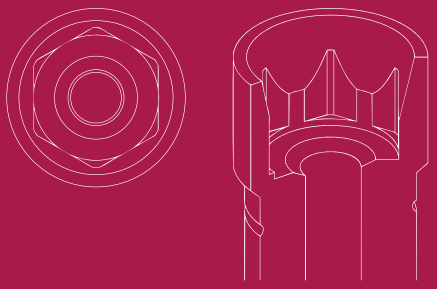

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,4	42°	19°	31.324.124.01-2	31.314.124.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.125.01-2	50.314.124.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY
30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.335.758.01-2
4		33.435.758.01-2
6		33.635.758.01-2

ANALOG

DIGITAL ANALOG
34.614.124.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.124.21-2	49.414.000.01-2	6	A	43.625.108.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.075.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.008.02-2	UNIGRIP	43.625.108.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S = Standard maximum angulation α_C = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH

Ø125

LIST OF COMPATIBILITIES **AVAILABLE**

MEDENTIS

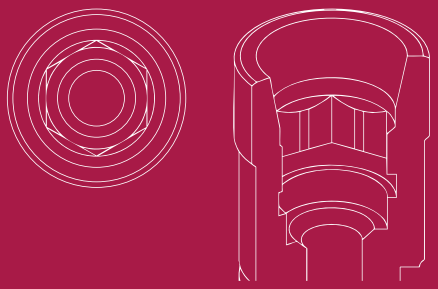

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,1	42°	20°	31.323.125.01-2	31.313.125.01-2
2	25°	15°	31.323.125.02-2	31.313.125.02-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1,1	30°	25°	15°	31.323.125.21-2	31.313.125.21-2
3	20°	15°	10°	-	31.313.125.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.313.125.01-2	43.621.410.01-2
12	52.412.117.01-2		43.624.410.01-2



LAB SCANBODY
30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	25°	33.315.804.01-2	34.613.125.01-2
4		33.415.804.01-2	
6		33.615.804.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.125.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.316.078.01-2	41.316.124.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.01-2	TORX T6	43.601.107.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.125.01-2
2	42.303.125.02-2
3	42.303.125.03-2
4	42.303.125.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
1,5/2,9	48.312.125.01-2
2,5/3,9	48.312.125.02-2
3,5/4,9	48.312.125.03-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

Ø128

LIST OF COMPATIBILITIES **AVAILABLE**

MEGAGEN

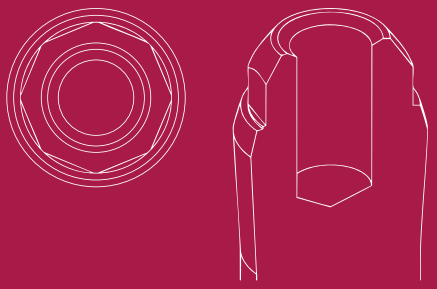

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
2,5	45°	30°	31.322.128.01-2	-



LAB SCANBODY
30.413.002.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.044.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.003.05-2	Hex. 1.20	43.601.103.02-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O129

LIST OF COMPATIBILITIES **AVAILABLE**

NOBEL BIOCARE - SOUTHERN IMPLANTS

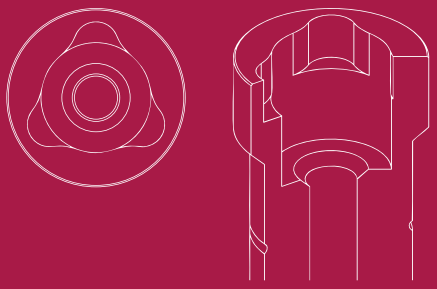

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	35°	30°	31.325.129.01-2	31.315.129.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.130.01-2	50.315.129.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY
30.415.007.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.958.01-2
4		33.490.958.01-2
6		33.690.958.01-2

ANALOG

DIGITAL ANALOG	ANALOG
34.615.129.01-2	22.615.129.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.320.090.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.008.03-2	UNIGRIP	43.625.108.01-2



COMPATIBLE WITH
0130

LIST OF COMPATIBILITIES **AVAILABLE**

DENTAURUM

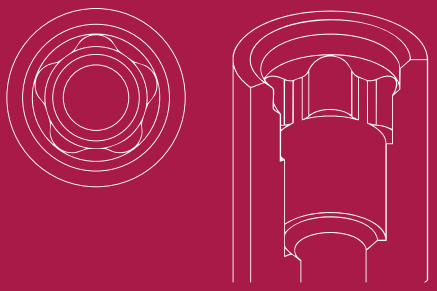

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	30°	29°	31.322.130.01-2	31.312.130.01-2



LAB SCANBODY
30.412.001.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.081.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.08-2	Hex. 1.27	43.625.105.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

0131

LIST OF COMPATIBILITIES **AVAILABLE**

DENTAURUM

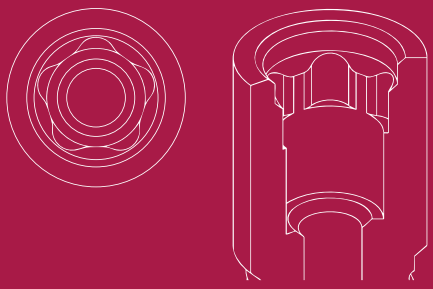

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	29°	31.323.131.01-2	31.313.131.01-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,5	30°	20°	15°	31.323.131.21-2	31.313.131.21-2



LAB SCANBODY
30.413.002.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.081.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.08-2	Hex. 1.27	43.625.105.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

Ø132

LIST OF COMPATIBILITIES **AVAILABLE**

DENTAURUM

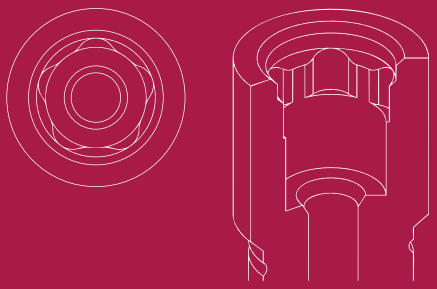

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	28°	31.324.132.01-2	31.314.132.01-2



LAB SCANBODY
30.414.003.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.081.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.08-2	Hex. 1.27	43.625.105.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O135

LIST OF COMPATIBILITIES **AVAILABLE**

STRAUMANN

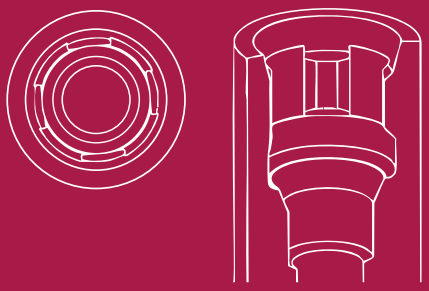

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	45°	30°	31.320.135.01-2	31.310.135.01-2



LAB SCANBODY
30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.315.804.01-2
4		33.415.804.01-2
6		33.615.804.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.135.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.080.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.007.02-2	TORX T6	43.601.107.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
O136

LIST OF COMPATIBILITIES **AVAILABLE**

ALPHABIO

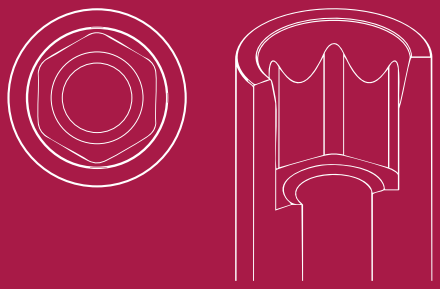

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,7	45°	30°	31.320.136.01-2	31.310.136.01-2
1,5	25°	20°	31.320.136.02-2	31.310.136.02-2
3	20°	-	31.320.136.04-2	31.310.136.04-2
4	20°	-	31.320.136.05-2	31.310.136.05-2
5	15°	-	31.320.136.06-2	31.310.136.06-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.128.01-2	50.310.136.01-2 50.310.136.04-2 (IG=3mm)	43.621.415.01-2



LAB SCANBODY
30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.360.754-01-2
4		33.460.754.01-2
6		33.660.754.01-2

ANALOG

DIGITAL ANALOG
34.610.136.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.071.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.004.03-2	Hex. 1.25	43.601.104.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.300.136.01-2
2	42.300.136.02-2
3	42.300.136.03-2
4	42.300.136.04-2


VIEW COMPONENTS



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O137

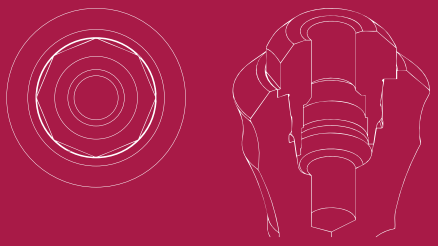

LIST OF COMPATIBILITIES **AVAILABLE**

STRAUMANN

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	45°	30°	31.324.137.01-2	31.314.137.01-2



LAB SCANBODY
30.414.008.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.044.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.007.04-2	TORX T6	43.601.107.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O145

LIST OF COMPATIBILITIES **AVAILABLE**

ADIN

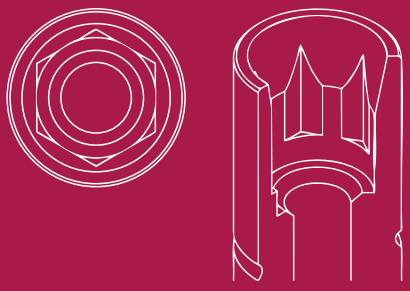

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,5	45°	-	31.320.145.01-2	31.310.145.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY
10	52.410.128.01-2



LAB SCANBODY
30.410.006.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.315.078.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.005.01-2	Hex. 1.27	43.601.105.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O149

LIST OF COMPATIBILITIES **AVAILABLE**

ANTHOGYR

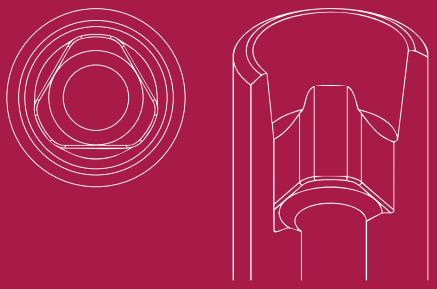

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,5	45°	29°	31.323.149.01-2	31.313.149.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.132.01-2	50.310.161.01-2	43.621.415.01-2
12	52.412.132.01-2		



LAB SCANBODY
30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.320.704-01-2*
4		33.420.704.01-2*
6		33.620.704.01-2*

*Only for R

ANALOG

DIGITAL ANALOG
34.610.161.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.079.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW
40.316.014.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.161.01-2
2	42.302.161.02-2
3	42.302.161.03-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	NON ENGAGING
3/4.4	48.312.161.05-2

VIEW COMPONENTS




COMPATIBLE WITH

0150

LIST OF COMPATIBILITIES **AVAILABLE**

BEGO

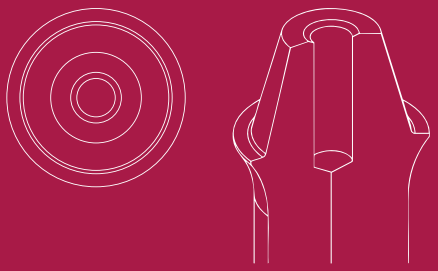

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	-	31.323.150.01-2	-



LAB SCANBODY
30.413.005.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.046.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O151

LIST OF COMPATIBILITIES **AVAILABLE**

BTI

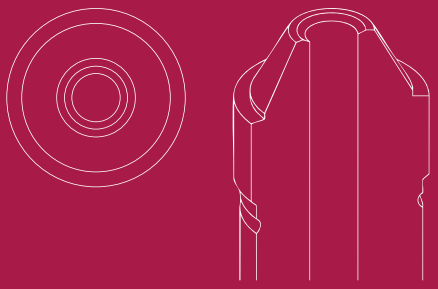

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	30°	31.323.151.01-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
9	52.409.123.01-2	50.313.151.01-2	43.621.410.01-2 43.624.410.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2

ANALOG

DIGITAL ANALOG
34.613.151.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.039.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.008.01-2	UNIGRIP	43.625.108.01-2

COMPATIBLE WITH

O158

LIST OF COMPATIBILITIES **AVAILABLE**

IMPLANT DIRECT

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.158.31-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	

CAPS	HEIGHT	TYPE
49.418.000.01-2	3,8	Regular
49.418.000.02-2	3,8	Wide
49.419.000.01-2	6	Regular
49.419.000.02-2	6	Wide
49.420.000.01-2	8	Regular
49.420.000.02-2	8	Wide



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.317.040.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{DI} - Direct to implant maximum angulation

COMPATIBLE WITH

O159

LIST OF COMPATIBILITIES **AVAILABLE**

HAHN IMPLANT (GLIDEWELL) - NOBEL BIOCARE - REFLECT

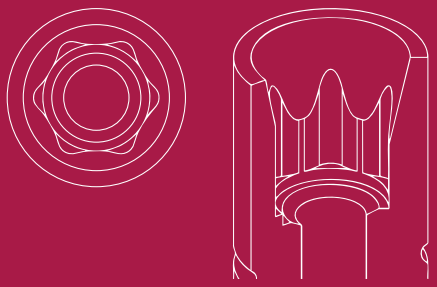

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,5	41°	17°	31.320.159.01-2	31.310.159.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.128.01-2	50.310.159.01-2	43.621.415.01-2



LAB SCANBODY
30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.335.754.01-2*
4	25°	33.435.754.01-2*
6		33.635.754.01-2*

*Only for R

ANALOG

DIGITAL ANALOG	ANALOG
34.610.159.01-2	22.610.159.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.067.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.008.02-2	UNIGRIP	43.625.108.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.300.159.01-2
2	42.300.159.02-2
3	42.300.159.03-2
4	42.300.159.04-2

VIEW COMPONENTS




COMPATIBLE WITH

0160

LIST OF COMPATIBILITIES **AVAILABLE**

STRAUMANN

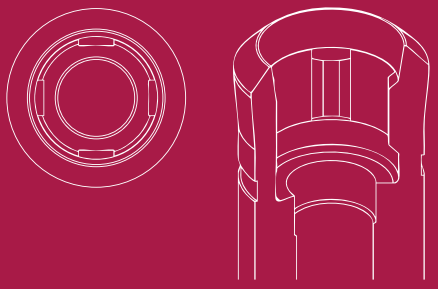

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	30°	31.320.160.01-2	31.310.160.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.131.01-2	50.310.160.01-2	43.621.415.01-2



LAB SCANBODY	SCANALOG
30.410.006.01-2	23.410.160.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.315.804.01-2
4	25°	33.415.804.01-2
6		33.615.804.01-2

ANALOG

DIGITAL ANALOG	ANALOG
34.610.160.01-2	22.610.160.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.078.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.01-2	TORX T6	43.601.107.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O161

LIST OF COMPATIBILITIES **AVAILABLE**

ANTHOGYR

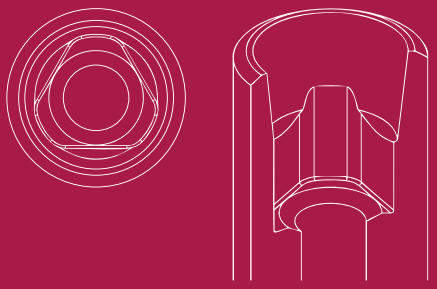

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,5	45°	25°	31.320.161.01-2	31.310.161.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.132.01-2	50.310.161.01-2	43.621.415.01-2
12	52.412.132.01-2		



LAB SCANBODY
30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.320.704.01-2*
4		33.420.704.01-2*
6		33.620.704.01-2*

*Only for R

ANALOG

DIGITAL ANALOG
34.610.161.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.079.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW
40.316.014.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.161.01-2
2	42.302.161.02-2
3	42.302.161.03-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	NON ENGAGING
3/4.4	48.312.161.05-2

VIEW COMPONENTS




COMPATIBLE WITH

O162

LIST OF COMPATIBILITIES **AVAILABLE**

ANTHOGYR

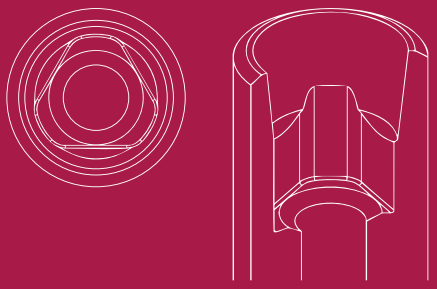

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,5	45°	24°	31.324.162.01-2	31.314.162.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.132.01-2	50.310.161.01-2	43.621.415.01-2
12	52.412.132.01-2		



LAB SCANBODY
30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.320.704.01-2*
4		33.420.704.01-2*
6		33.620.704.01-2*

*Only for R

ANALOG

DIGITAL ANALOG
34.610.161.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.079.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW
40.316.014.01-2



COMPATIBLE WITH
O163

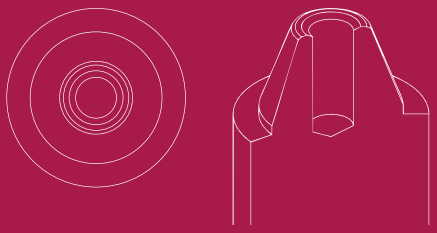

LIST OF COMPATIBILITIES **AVAILABLE**

ANTHOGYR

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	30°	31.323.163.01-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.112.01-2	50.313.163.01-2	43.620.411.01-2



LAB SCANBODY
30.413.005.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2

ANALOG

DIGITAL ANALOG
34.613.163.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.314.039.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW
40.314.014.01-2




COMPATIBLE WITH

O166

LIST OF COMPATIBILITIES **AVAILABLE**

LASAK

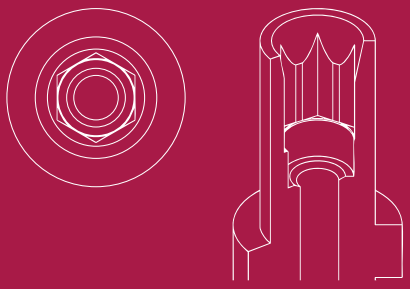

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,9	45°	30°	31.320.166.01-2	31.310.166.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.128.01-2	50.310.166.03-2 (IG=3mm)	43.621.415.01-2



LAB SCANBODY
30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.335.754.01-2
4		33.435.754.01-2
6		33.635.754.01-2

ANALOG

DIGITAL ANALOG
34.610.166.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.314.084.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



COMPATIBLE WITH
O167

LIST OF COMPATIBILITIES **AVAILABLE**

LASAK

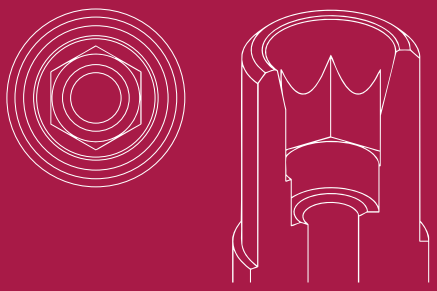

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,9	43°	30°	31.322.167.01-2	31.312.167.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.313.167.03-2 (IG=3mm)	43.621.410.01-2
12	52.412.117.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	20°	33.330.734.01-2
4		33.430.734.01-2
6		33.630.734.01-2

ANALOG

DIGITAL ANALOG
34.613.167.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.084.02-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.004.01-2	Hex. 1.25	43.601.104.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
O169

LIST OF COMPATIBILITIES **AVAILABLE**

ALPHABIO

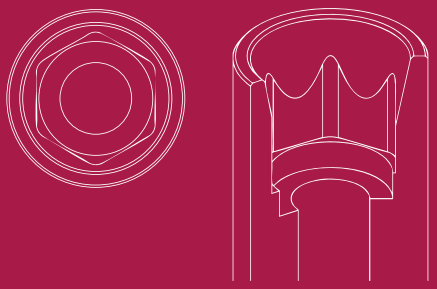

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	45°	29°	31.322.169.01-2	31.312.169.01-2
1,5	25°	15°	31.322.169.02-2	31.312.169.02-2
3	20°	-	31.322.169.04-2	31.312.169.04-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1,5	30°	25°	15°	31.322.169.22-2	31.312.169.22-2
3	25°	20°	15°	31.322.169.24-2	31.312.169.24-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.312.169.01-2	43.621.410.01-2
12	52.412.117.01-2	50.312.169.04-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	25°	33.330.734.01-2	34.612.169.01-2
4		33.430.734.01-2	
6		33.630.734.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.169.21-2	49.414.000.01-2	6	A	43.601.104.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.317.070.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.169.01-2
2	42.302.169.02-2
3	42.302.169.03-2
4	42.302.169.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
1,5/2,9	48.312.169.01-2
2,5/3,9	48.312.169.02-2
3,5/4,9	48.312.169.03-2

VIEW COMPONENTS



INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
3	62.302.169.03-2
4	62.302.169.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
0170

LIST OF COMPATIBILITIES **AVAILABLE**

SIC INVENT

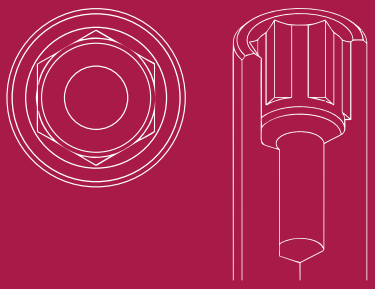

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	38°	-	31.322.170.01-2	31.312.170.01-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,3	30°	20°	15°	31.322.170.21-2	31.312.170.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY
10	52.410.104.01-2
12	52.412.104.01-2



LAB SCANBODY
30.410.006.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.170.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.079.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

0171

LIST OF COMPATIBILITIES **AVAILABLE**

SIC INVENT

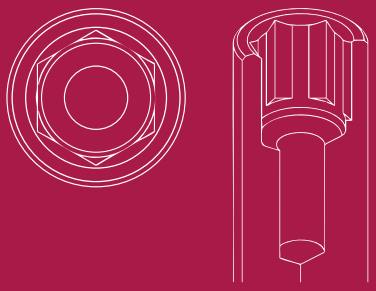

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	35°	-	31.323.171.01-2	31.313.171.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY
10	52.410.117.01-2
12	52.412.117.01-2



LAB SCANBODY
30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.390.716.01-2
4	25°	33.490.716.01-2
6		33.690.716.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.170.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.079.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O173

LIST OF COMPATIBILITIES **AVAILABLE**

KLOCKNER

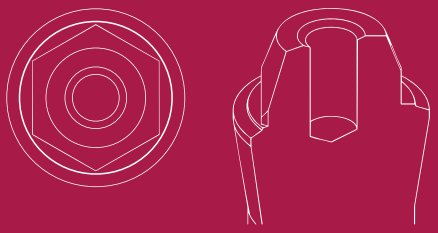

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	30°	31.323.173.01-2	-



LAB SCANBODY
30.413.005.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.040.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW
40.314.012.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
O176

LIST OF COMPATIBILITIES **AVAILABLE**

EASY IMPLANT

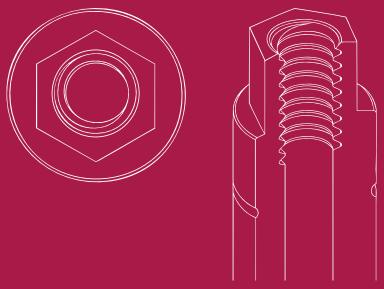

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	35°	-	-	31.310.176.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.138.01-2	50.310.176.01-2	43.621.415.01-2



LAB SCANBODY
30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	35°	33.360.756.01-2
4		33.460.756.01-2
6		33.660.756.01-2

ANALOG

DIGITAL ANALOG
34.610.176.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.044.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

Ø178

LIST OF COMPATIBILITIES **AVAILABLE**

P-I BRANEMARK - ZIMMER

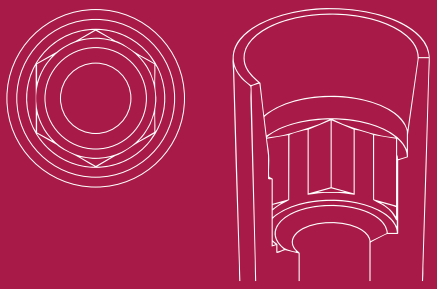

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,5	45°	-	31.320.178.01-2	31.310.178.01-2



LAB SCANBODY
30.410.006.01-2



ANALOG

DIGITAL ANALOG
34.610.178.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.080.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



MULTI-UNIT

INTERNAL MULTI-UNIT

GH (mm)	NON ENGAGING
3	62.300.178.03-2
4	62.300.178.04-2


VIEW COMPONENTS



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O181

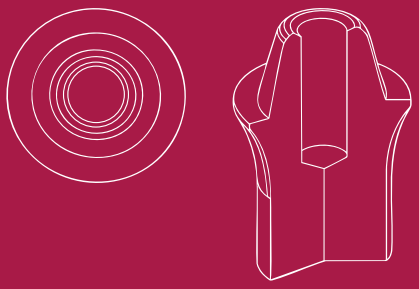

LIST OF COMPATIBILITIES **AVAILABLE**

PALTOP - SURCAM DENTAL

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,4	45°	-	31.322.181.01-2	-



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,4	30°	30°	20°	31.322.181.21-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.112.01-2	50.312.181.01-2	43.620.411.01-2



LAB SCANBODY	SCANALOG
30.413.005.01-2	23.412.181.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.360.756.01-2
4		33.460.756.01-2
6		33.660.756.01-2

ANALOG

DIGITAL ANALOG
34.612.181.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.181.31-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	

CAPS	HEIGHT	TYPE
49.418.000.01-2	3,8	Regular
49.418.000.02-2	3,8	Wide
49.419.000.01-2	6	Regular
49.419.000.02-2	6	Wide
49.420.000.01-2	8	Regular
49.420.000.02-2	8	Wide



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.043.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O183

LIST OF COMPATIBILITIES **AVAILABLE**

ANKLYOS

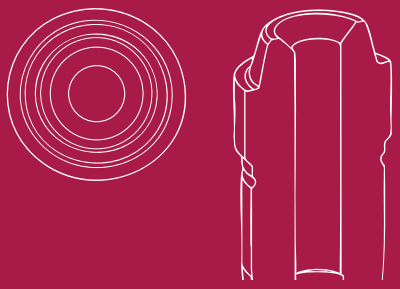

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	-	31.322.183.01-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.136.01-2	50.312.183.01-2	43.620.411.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.330.734.01-2
4		33.430.734.01-2
6		33.630.734.01-2

ANALOG

DIGITAL ANALOG
34.612.183.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE
54.322.183.31-2	49.414.000.01-2	6	A
	49.415.000.01-2	9	A
	49.416.000.01-2	13	A
	49.414.000.02-2	6	B
	49.415.000.02-2	9	B
	49.416.000.02-2	13	B
	49.414.000.03-2	6	C
	49.415.000.03-2	9	C
	49.416.000.03-2	13	C
	49.416.000.04-2	13	D
	49.416.000.05-2	13	E



CAPS	HEIGHT	TYPE
49.418.000.01-2	3,8	Regular
49.418.000.02-2	3,8	Wide
49.419.000.01-2	6	Regular
49.419.000.02-2	6	Wide
49.420.000.01-2	8	Regular
49.420.000.02-2	8	Wide

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.048.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O186

LIST OF COMPATIBILITIES **AVAILABLE**

NEODENT

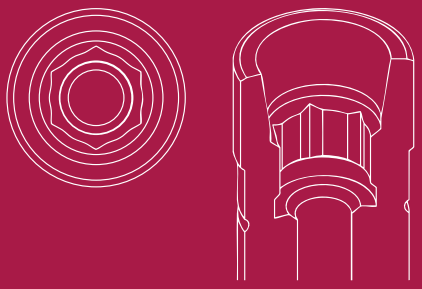

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,2	40°	30°	31.323.186.01-2	31.313.186.01-2
2,5	20°	18°	31.323.186.02-2	31.313.186.02-2
3,5	15°	-	31.323.186.03-2	31.313.186.03-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1,2	30°	25°	15°	31.323.186.21-2	31.313.186.21-2
2,5	30°	25°	15°	31.323.186.22-2	31.313.186.22-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2	50.313.186.04-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
10	52.410.101.01-2		
12	52.412.101.01-2		



LAB SCANBODY
30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	25°	33.330.734.01-2	34.613.186.01-2
4		33.430.734.01-2	
6		33.630.734.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE
54.315.186.21-2	49.414.000.01-2	6	A
	49.415.000.01-2	9	A
	49.416.000.01-2	13	A
	49.414.000.02-2	6	B
	49.415.000.02-2	9	B
	49.416.000.02-2	13	B
	49.414.000.03-2	6	C
	49.415.000.03-2	9	C
	49.416.000.03-2	13	C
	49.416.000.04-2	13	D
	49.416.000.05-2	13	E



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.084.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW
40.316.008.04-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.186.01-2
2	42.303.186.02-2
3	42.303.186.03-2
4	42.303.186.04-2
5	42.303.186.05-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
1,5/2,9	48.312.186.01-2
2,5/3,9	48.312.186.02-2
3,5/4,9	48.312.186.03-2

VIEW COMPONENTS



INTERNAL MULTI-UNIT

GH (mm)	NON ENGAGING
2	62.303.186.02-2
3	62.303.186.03-2
4	62.303.186.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O187

LIST OF COMPATIBILITIES **AVAILABLE**

BEGO

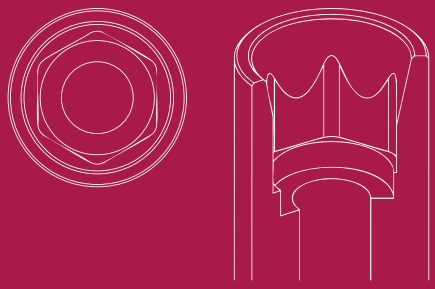

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	25°	31.322.009.01-2	31.312.009.01-2
0,5	25°	25°	31.322.009.02-2	31.312.009.02-2
1	25°	-	31.322.009.03-2	31.312.009.03-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.114.01-2	50.312.187.01-2	43.621.410.01-2 43.624.410.01-2
12	52.412.114.01-2		



LAB SCANBODY
30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2

ANALOG

DIGITAL ANALOG
34.612.187.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.059.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




COMPATIBLE WITH

O188

LIST OF COMPATIBILITIES **AVAILABLE**

ADIN

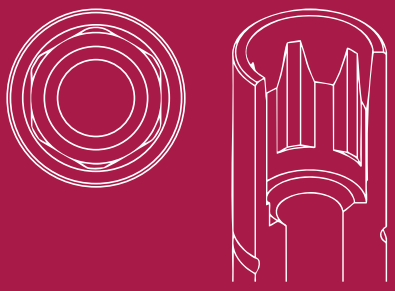

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,5	45°	-	31.320.188.01-2	31.310.188.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY
10	52.410.128.01-2



LAB SCANBODY
30.410.006.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.315.078.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S = Standard maximum angulation α_C = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH
0190



LIST OF COMPATIBILITIES **AVAILABLE**

DENTIUM

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,8	45°	-	31.320.190.01-2	31.310.190.01-2



LAB SCANBODY
30.410.006.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.084.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

0191

LIST OF COMPATIBILITIES **AVAILABLE**

DENTIUM



STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,8	45°	-	31.322.191.01-2	31.312.191.01-2



LAB SCANBODY
30.412.001.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.084.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.003.01-2	Hex. 1.20	43.601.103.02-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O192

LIST OF COMPATIBILITIES **AVAILABLE**

DENTIUM

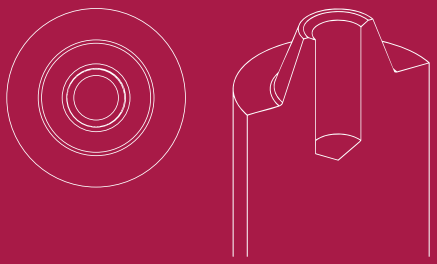

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	-	31.323.192.01-2	-



LAB SCANBODY
30.413.005.01-2



SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.048.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O193

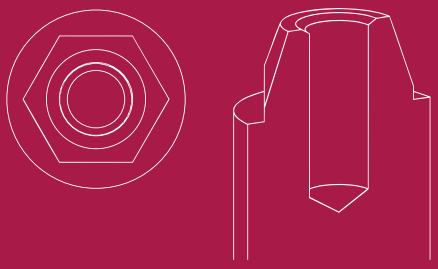

LIST OF COMPATIBILITIES **AVAILABLE**

COWELLMEDI - DENTIUM

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	-	31.323.193.01-2	-



LAB SCANBODY
30.413.005.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	0°	33.345.856.01-2
4		33.445.856.01-2
6		33.645.856.01-2

ANALOG

DIGITAL ANALOG
34.613.193.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.193.31-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



CAPS	HEIGHT	TYPE
49.418.000.01-2	3,8	Regular
49.418.000.02-2	3,8	Wide
49.419.000.01-2	6	Regular
49.419.000.02-2	6	Wide
49.420.000.01-2	8	Regular
49.420.000.02-2	8	Wide

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.051.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.005.01-2	-	43.601.105.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

Ø195

LIST OF COMPATIBILITIES **AVAILABLE**

ALPHABIO

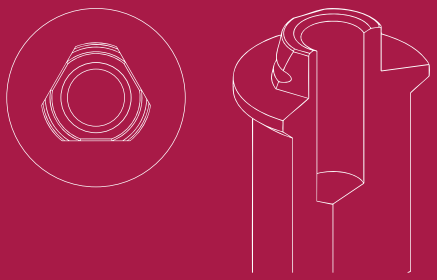

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	-	31.323.195.01-2	-



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,5	30°	25°	25°	31.323.195.21-2	-



LAB SCANBODY
30.413.005.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.195.31-2	49.414.000.01-2	6	A	43.601.104.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	

CAPS	HEIGHT	TYPE
49.418.000.01-2	3,8	Regular
49.418.000.02-2	3,8	Wide
49.419.000.01-2	6	Regular
49.419.000.02-2	6	Wide
49.420.000.01-2	8	Regular
49.420.000.02-2	8	Wide



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.317.041.01-2	41.317.052.36-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

0196

LIST OF COMPATIBILITIES **AVAILABLE**

GC TECH

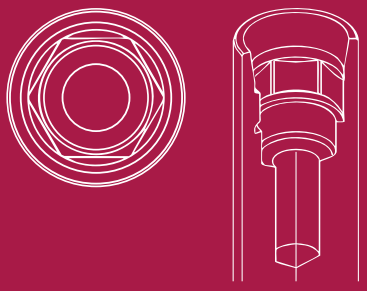

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,2	40°	-	31.320.196.01-2	31.310.196.01-2
2	25°	-	31.320.196.02-2	31.310.196.02-2
3	25°	-	31.320.196.03-2	31.310.196.03-2



LAB SCANBODY
30.410.006.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.086.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O197

LIST OF COMPATIBILITIES **AVAILABLE**

GC TECH

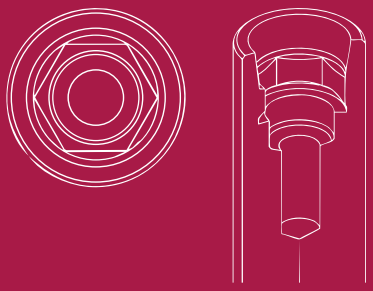

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,2	35°	25°	31.322.197.01-2	31.312.197.01-2
2	20°	25°	31.322.197.02-2	31.312.197.02-2
3	20°	-	31.322.197.03-2	31.312.197.03-2



LAB SCANBODY
30.412.001.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.086.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O198

LIST OF COMPATIBILITIES **AVAILABLE**

GC TECH

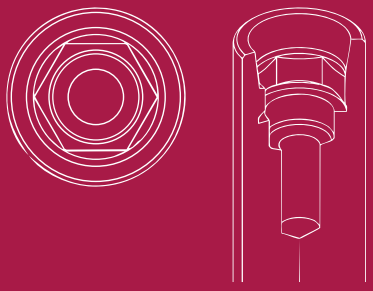

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,2	40°	-	31.324.198.01-2	31.314.198.01-2



LAB SCANBODY
30.414.003.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.086.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
0205

LIST OF COMPATIBILITIES **AVAILABLE**

ZIMMER

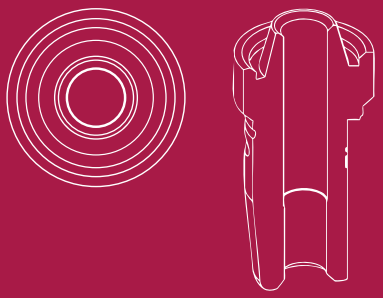

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	-	31.322.205.01-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.112.01-2	50.312.205.01-2	43.620.411.01-2



LAB SCANBODY
30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.390.716.01-2
4		33.490.716.01-2
6		33.690.716.01-2

ANALOG

DIGITAL ANALOG
34.612.205.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.205.31-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	

CAPS	HEIGHT	TYPE
49.418.000.01-2	3,8	Regular
49.418.000.02-2	3,8	Wide
49.419.000.01-2	6	Regular
49.419.000.02-2	6	Wide
49.420.000.01-2	8	Regular
49.420.000.02-2	8	Wide



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.317.040.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
0207

LIST OF COMPATIBILITIES **AVAILABLE**

STRAUMANN

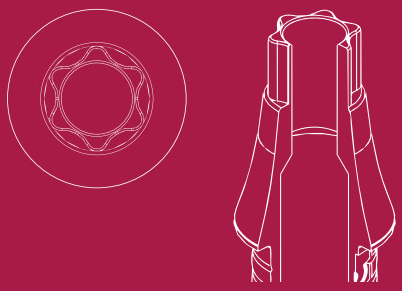

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,5	35°	15°	31.320.207.01-2	31.310.207.01-2
3	20°	-	31.320.207.03-2	31.310.207.03-2
4	15°	-	31.320.207.04-2	31.310.207.04-2



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
1,5	25°	20°	15°	31.320.207.21-2	31.310.207.21-2
3	20°	15°	10°	31.320.207.23-2	31.310.207.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.310.207.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
12	52.412.103.01-2		



LAB SCANBODY
30.410.006.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	30°	33.345.856.01-2*	34.610.207.01-2
4		33.445.856.01-2*	
6		33.645.856.01-2*	

*Only for R



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.207.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.066.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.03-2	TORX T6	43.601.107.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.207.01-2
2	42.302.207.02-2
3	42.302.207.03-2
4	42.302.207.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
2,5/3,9	48.312.207.02-2
3,5/4,9	48.312.207.03-2
4,5/5,9	48.312.207.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O2O8

LIST OF COMPATIBILITIES **AVAILABLE**

STRAUMANN

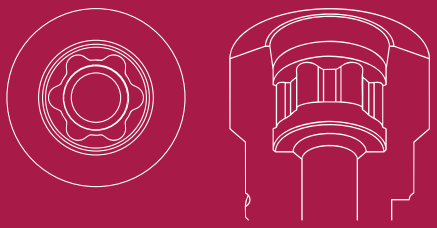

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,5	45°	20°	31.324.208.01-2	31.314.208.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.310.207.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
12	52.412.103.01-2		



LAB SCANBODY
30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.345.856.01-2*
4		33.445.856.01-2*
6		33.645.856.01-2*

*Only for R

ANALOG

DIGITAL ANALOG
34.614.208.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.207.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.066.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.03-2	TORX T6	43.601.107.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.207.01-2
2	42.302.207.02-2
3	42.302.207.03-2
4	42.302.207.04-2

VIEW COMPONENTS



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
2,5/3,9	48.312.207.02-2
3,5/4,9	48.312.207.03-2
4,5/5,9	48.312.207.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O222

LIST OF COMPATIBILITIES **AVAILABLE**

MEGAGEN

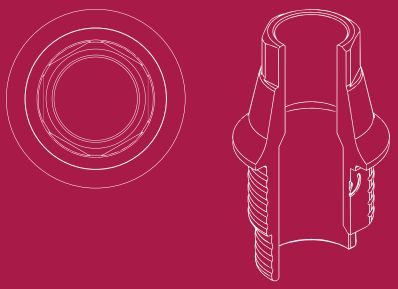

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	30°	-	31.320.222.01-2	31.310.222.01-2
2	25°	-	31.320.222.02-2	31.310.222.02-2
3	20°	-	31.320.222.03-2	31.310.222.03-2



LAB SCANBODY
30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.315.604.01-2
4	25°	33.415.604.01-2
6		33.615.604.01-2

ANALOG

DIGITAL ANALOG
34.610.222.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.222.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.078.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O223

LIST OF COMPATIBILITIES **AVAILABLE**

MEGAGEN

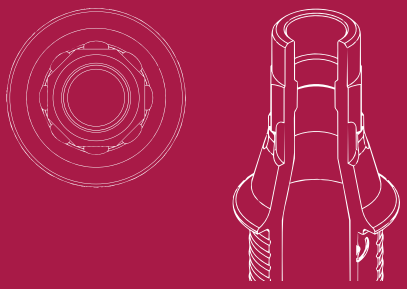

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	30°	-	31.323.223.01-2	31.313.223.01-2
2	25°	15°	31.323.223.02-2	31.313.223.02-2
3	20°	10°	31.323.223.03-2	31.313.223.03-2



LAB SCANBODY
30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.315.604.01-2
4	25°	33.415.604.01-2
6		33.615.604.01-2

ANALOG

DIGITAL ANALOG
34.613.223.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.223.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.078.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O229

LIST OF COMPATIBILITIES **AVAILABLE**

PALTOP

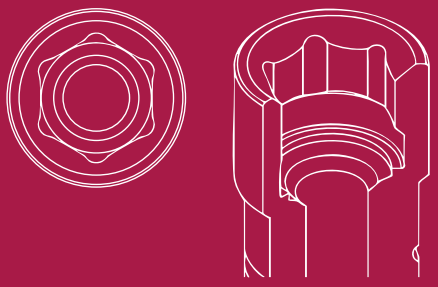

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	40°	-	31.320.229.01-2	31.310.229.01-2



LAB SCANBODY
30.410.006.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.064.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation


COMPATIBLE WITH

O236

LIST OF COMPATIBILITIES **AVAILABLE**

ROOTT





STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,5	20°	25°	31.322.236.01-2	31.312.236.01-2



LAB SCANBODY
30.412.001.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.236.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.075.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




COMPATIBLE WITH

O242

LIST OF COMPATIBILITIES **AVAILABLE**

OXY

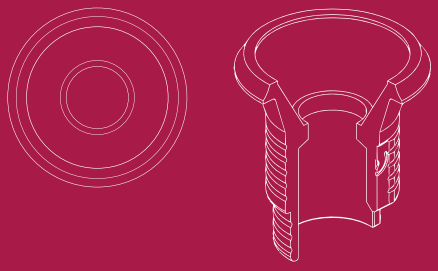

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	40°	-	31.323.242.01-2	-



LAB SCANBODY
30.413.005.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.370.716.01-2
4	25°	33.470.716.01-2
6		33.670.716.01-2

ANALOG

DIGITAL ANALOG
34.613.242.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.242.31-2	49.414.000.01-2	6	A	43.601.104.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	

CAPS	HEIGHT	TYPE
49.418.000.01-2	3,8	Regular
49.418.000.02-2	3,8	Wide
49.419.000.01-2	6	Regular
49.419.000.02-2	6	Wide
49.420.000.01-2	8	Regular
49.420.000.02-2	8	Wide



SCREWS

DYNAMIC SCREW	DYNAMIC SCREW Ø2,6	LENGTH	SCREWDRIVER
41.318.045.01-2	41.318.055.01-2 (Direct MU)	18	43.618.201.01-2
41.318.055.01-2 (IMPLANT DIRECT)		24	43.624.201.01-2
		32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O243

LIST OF COMPATIBILITIES **AVAILABLE**

GMI (ILERIMPLANT)

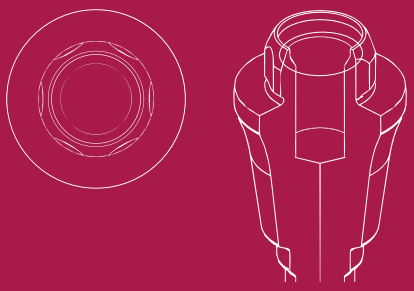

SCREWS

DYNAMIC SCREW	LENTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.084.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.003.01-2	Hex. 1.20	43.601.103.02-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
2	42.303.243.02-2
3	42.303.243.03-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{id} - Direct to implant maximum angulation

COMPATIBLE WITH

O245

LIST OF COMPATIBILITIES **AVAILABLE**

C-TECH

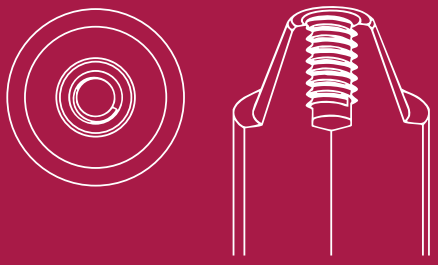

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,6	40°	-	31.323.245.01-2	-



LAB SCANBODY
30.413.005.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.039.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O246

LIST OF COMPATIBILITIES **AVAILABLE**

C-TECH

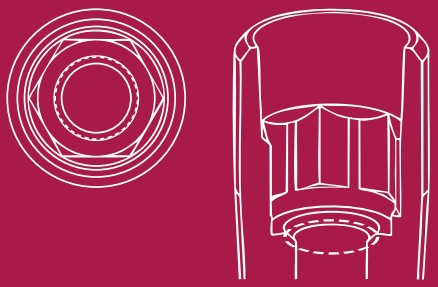

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	25°	-	31.322.246.01-2	31.312.246.01-2
2	25°	-	31.322.246.02-2	31.312.246.02-2



LAB SCANBODY
30.412.001.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.080.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH
O247

LIST OF COMPATIBILITIES **AVAILABLE**

DIO IMPLANTS

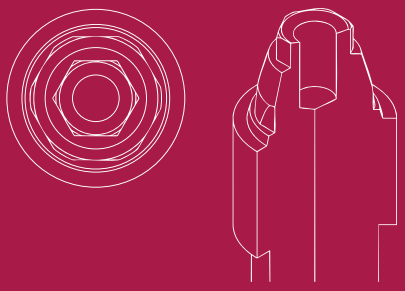

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	40°	-	31.323.247.01-2	-



LAB SCANBODY
30.413.005.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.247.31-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	

CAPS	HEIGHT	TYPE
49.418.000.01-2	3,8	Regular
49.418.000.02-2	3,8	Wide
49.419.000.01-2	6	Regular
49.419.000.02-2	6	Wide
49.420.000.01-2	8	Regular
49.420.000.02-2	8	Wide



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.040.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O249

LIST OF COMPATIBILITIES **AVAILABLE**

MEDENTIS

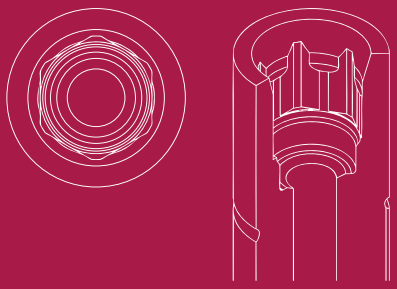

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	40°	-	31.320.249.01-2	31.310.249.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.128.01-2	50.310.249.03-2 (IG=3mm)	43.621.415.01-2



LAB SCANBODY
30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.315.804.01-2
4		33.415.804.01-2
6		33.615.804.01-2

ANALOG

DIGITAL ANALOG
34.610.249.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.314.080.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.003.08-2	Hex 1,20	43.601.103.02-2




COMPATIBLE WITH

O251

LIST OF COMPATIBILITIES **AVAILABLE**

BREDENT MEDICAL

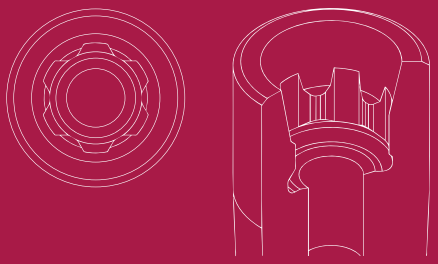

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1	40°	25°	31.322.251.01-2	31.312.251.01-2
1,5	40°	20°	31.322.251.02-2	31.312.251.02-2
3	25°	10°	31.322.251.04-2	31.312.251.04-2



LAB SCANBODY
30.412.001.01-2



ANALOG

DIGITAL ANALOG
34.612.251.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.251.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.064.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.01-2	Hex 1,20	43.601.107.01-2



LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.251.01-2
2	42.302.251.02-2
3	42.302.251.03-2
4	42.302.251.04-2

VIEW COMPONENTS



INTERNAL MULTI-UNIT

GH (mm)	NON ENGAGING
3	62.302.251.03-2
4	62.302.251.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O257

LIST OF COMPATIBILITIES **AVAILABLE**

BTI

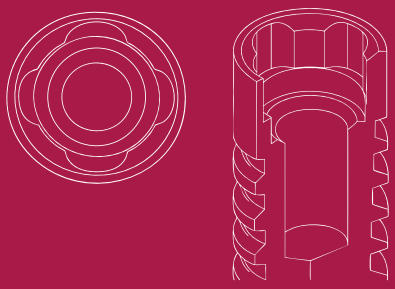

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.318.065.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.003.01-2	Hex. 1.20	43.601.103.02-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.257.01-2
2	42.302.257.02-2
3	42.302.257.03-2
4	42.302.257.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{id} - Direct to implant maximum angulation

COMPATIBLE WITH

O258

LIST OF COMPATIBILITIES **AVAILABLE**

ASTRA

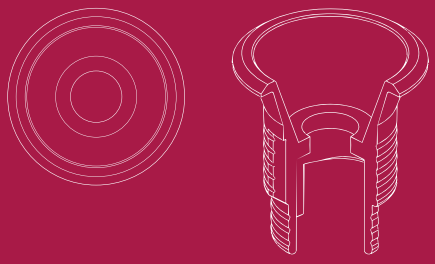

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,3	45°	30°	31.323.025.01-2	-



DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,3	30°	25°	10°	31.323.025.21-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.112.01-2	50.313.025.02-2 50.313.025.01-2	43.621.410.01-2 43.624.410.01-2
10	52.410.111.01-2		43.620.411.01-2



LAB SCANBODY	MINI SCANBODY	SCANALOG
30.413.005.01-2	53.413.025.01-2	23.413.025.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG	ANALOG
3	30°	33.390.716.01-2	34.613.025.01-2	22.613.025.01-2
4		33.490.716.01-2		
6		33.690.716.01-2		



SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.025.31-2	49.414.000.01-2	6	A	43.625.108.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



CAPS	HEIGHT	TYPE
49.418.000.01-2	3,8	Regular
49.418.000.02-2	3,8	Wide
49.419.000.01-2	6	Regular
49.419.000.02-2	6	Wide
49.420.000.01-2	8	Regular
49.420.000.02-2	8	Wide

LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S = Standard maximum angulation α_C = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.314.039.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.005.04-2	Hex 1,27	43.625.105.01-2




LIBRARY OPTIONS: **GH** = Gingival Height **CH** = Cement Height **H** = Height **IG** = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH
O260

LIST OF COMPATIBILITIES **AVAILABLE**

STRAUMANN

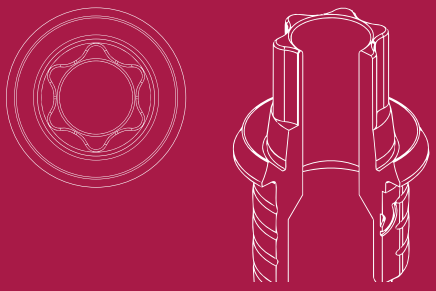

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	40°	-	31.320.260.01-2	31.310.260.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.310.207.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
12	52.412.103.01-2		



LAB SCANBODY	SCANALOG
30.410.006.01-2	23.410.260.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.345.856.01-2
4		33.445.856.01-2
6		33.645.856.01-2

ANALOG

DIGITAL ANALOG
34.610.260.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.207.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.066.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.03-2	TORX T6	43.601.107.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.207.01-2
2	42.302.207.02-2
3	42.302.207.03-2
4	42.302.207.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O261

LIST OF COMPATIBILITIES **AVAILABLE**

STRAUMANN

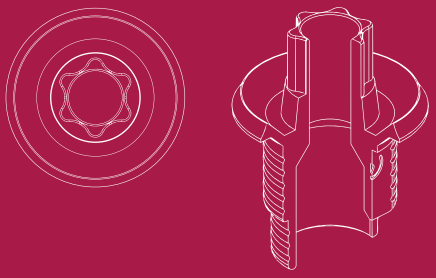

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	40°	-	31.323.261.01-2	31.313.261.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.310.207.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
12	52.412.103.01-2		



LAB SCANBODY	SCANALOG
30.413.004.01-2	23.413.261.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.345.856.01-2
4		33.445.856.01-2
6		33.645.856.01-2

ANALOG

DIGITAL ANALOG
34.613.261.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.207.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.066.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.03-2	TORX T6	43.601.107.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.207.01-2
2	42.302.207.02-2
3	42.302.207.03-2
4	42.302.207.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O262

LIST OF COMPATIBILITIES **AVAILABLE**

STRAUMANN

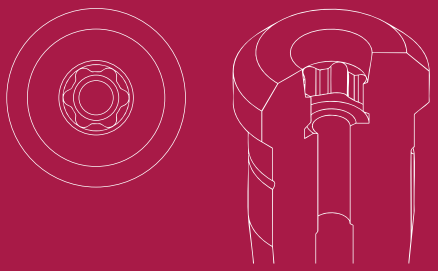

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	40°	-	31.324.262.01-2	31.314.262.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.310.207.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
12	52.412.103.01-2		



LAB SCANBODY
30.414.008.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.345.856.01-2
4		33.445.856.01-2
6		33.645.856.01-2

ANALOG

DIGITAL ANALOG
34.614.262.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.207.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.066.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.03-2	TORX T6	43.601.107.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.207.01-2
2	42.302.207.02-2
3	42.302.207.03-2
4	42.302.207.04-2

VIEW COMPONENTS




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O264

LIST OF COMPATIBILITIES **AVAILABLE**

MEGAGEN

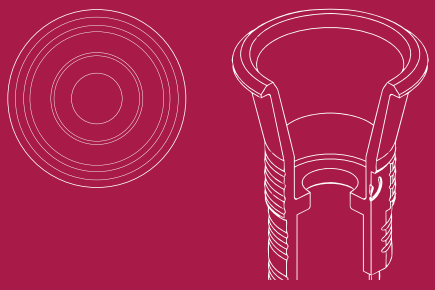

DYNAMIC 3TIBASE

GH (mm)	α_S CH=5mm	α_S CH=7mm	α_S CH=9mm	NON ENGAGING	ENGAGING
0,3	-	25°	25°	31.323.264.21-2	-



MINI SCANBODY
53.413.264.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.044.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_{di} - Direct to implant maximum angulation

COMPATIBLE WITH

O265

LIST OF COMPATIBILITIES **AVAILABLE**

ALPHA-DENT - PROTEG IMPLANTS

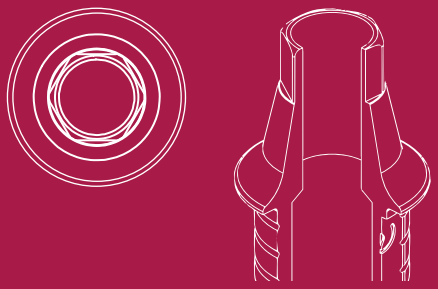

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
1,5	35°	-	31.322.265.03-2	31.312.265.03-2
2	25°	-	31.322.265.04-2	31.312.265.04-2



LAB SCANBODY
30.412.001.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.079.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O266

LIST OF COMPATIBILITIES **AVAILABLE**

TBR

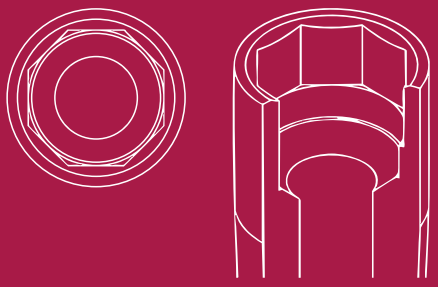

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	35°	-	31.320.266.01-2	31.310.266.01-2
2	25°	-	31.320.266.04-2	31.310.266.04-2



LAB SCANBODY
30.410.006.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.068.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O267

LIST OF COMPATIBILITIES **AVAILABLE**

TBR

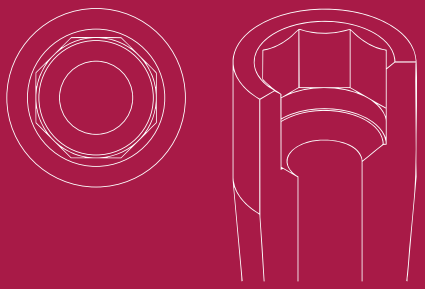

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	40°	-	31.322.267.01-2	31.312.267.01-2



LAB SCANBODY
30.412.001.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.068.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_S - Standard maximum angulation α_C - Standard maximum angulation α_d - Direct to implant maximum angulation

COMPATIBLE WITH

O268

LIST OF COMPATIBILITIES **AVAILABLE**

TBR

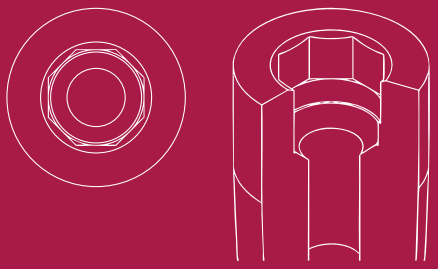

STANDARD DYNAMIC TIBASE

GH (mm)	α_S	α_C	NON ENGAGING	ENGAGING
0,5	45°	-	31.323.268.01-2	31.313.268.01-2



LAB SCANBODY
30.413.002.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.068.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LAB SCANBODY

EXTRAORAL LIBRARY

DYNAMIC TIBASE
DYNAMIC 3TIBASE

CAPTIVE LIBRARY

DYNAMIC TIBASE

DYNAMIC SCANBODY

SCANALOG

SCANBODY OP

CAPTIVE LIBRARY

DYNAMIC TIBASE

DIGITAL ANALOG

DYNAMIC SCANBODY
DAS_I/IG_XXXX

SCANALOG
DAS_SA_XXXX

SCANBODY OP
DAS_OP_XXXX

REFERENCE
DAS_R_XXXX

STANDARD LIBRARY

DYNAMIC TIBASE
DYNAMIC 3TIBASE

DIGITAL ANALOG

STANDARD PLUS LIBRARY

DYNAMIC TIBASE
DYNAMIC 3TIBASE

DIGITAL ANALOG

DIRECT TO IMPLANT

Implant connection NOT included

PREMIUM LIBRARY


DYNAMIC TIBASE
DYNAMIC 3TIBASE

DIGITAL ANALOG

DIRECT TO IMPLANT


Implant connection included


MULTI-UNIT DAS **LIBRARIES**

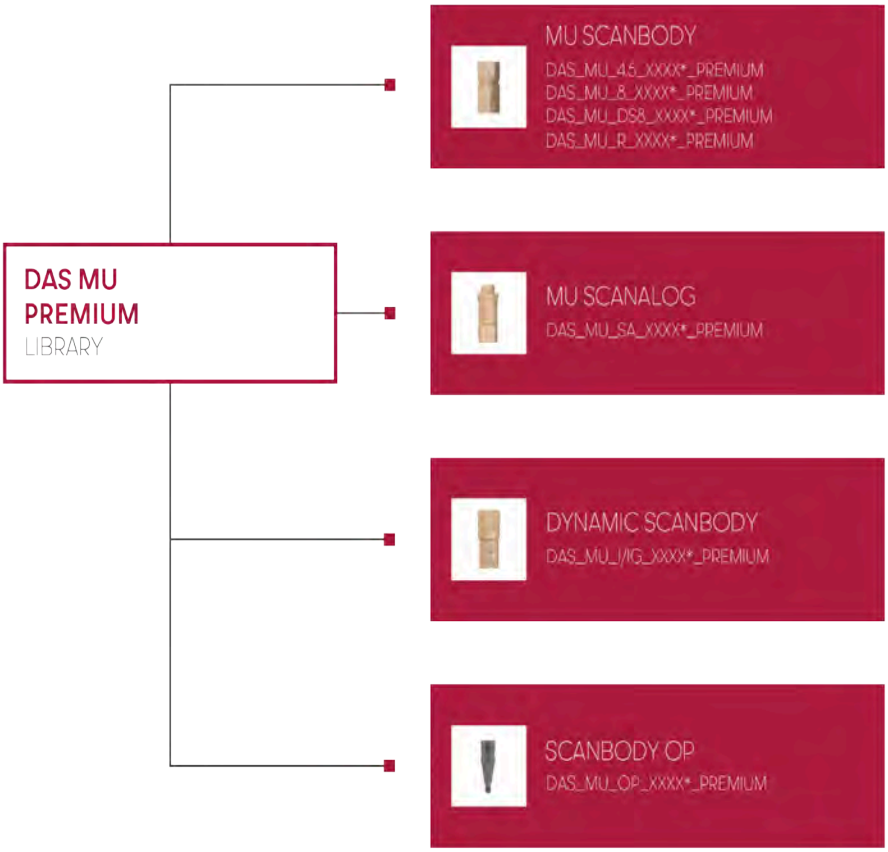

DYNAMIC SCREWS TECHNICAL SPECIFICATIONS

STRAIGHT SCREWS TECHNICAL SPECIFICATIONS

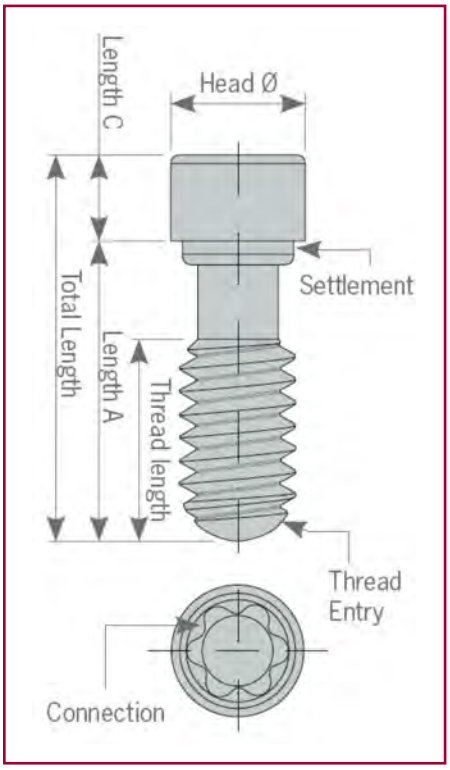

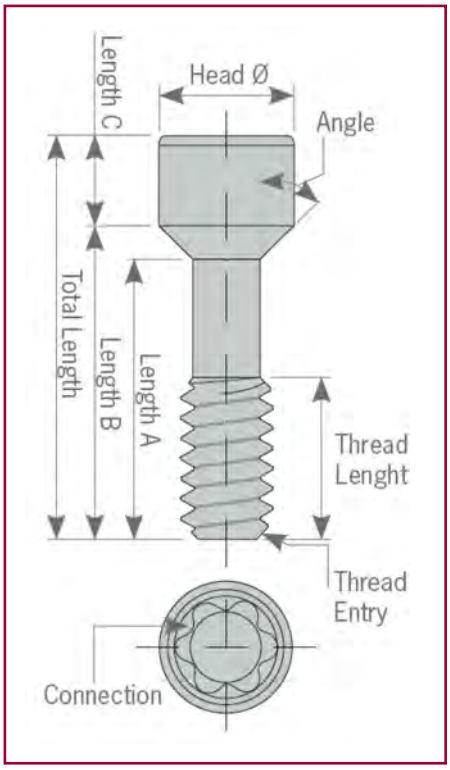

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
41.314.039.01-2	1.4	15 N·cm	3.9	1.8	2.1	-	1.8	2.4	straight	-	45° Chamfer	Hexalobular 1.70
41.314.040.02-2	1.4	15 N·cm	4	1.7	2.25	2.7	1.3	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.314.043.01-2	1.4	15 N·cm	4.3	1.8	2.03	2.9	1.4	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.314.044.01-2	1.4	15 N·cm	4.4	2.15	2.73	3	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.314.046.01-2	1.4	15 N·cm	4.6	2.5	2.5	3.17	1.43	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.314.064.01-2	1.4	15 N·cm	6.4	2.2	4.21	5.15	1.25	2.3	conical	25°	45° Chamfer	Hexalobular 1.70
41.314.067.02-2	1.4	15 N·cm	6.7	2.5	4.71	5.5	1.2	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.314.070.01-2	1.4	15 N·cm	7	2.3	5.39	5.65	1.35	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.314.074.01-2	1.4	15 N·cm	7.4	3.55	5	5.99	1.41	2.3	conical	25°	45° Chamfer	Hexalobular 1.70
41.314.076.01-2	1.4	15 N·cm	7.6	2.4	5.88	6.35	1.25	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.314.080.01-2	1.4	15 N·cm	8	2.1	4.96	6.8	1.2	2.3	conical	15°	45° Chamfer	Hexalobular 1.70
41.314.084.01-2	1.4	15 N·cm	8.4	2.5	5.92	6.85	1.55	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.314.105.01-2	1.4	15 N·cm	10.5	2.31	5	5.45	5.05	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.315.078.01-2	N0-80	15 N·cm	7.8	2.45	5.77	6	1.8	2.3	conical	65°	45° Chamfer	Hexalobular 1.70
41.316.040.01-2	1.6	20 N·cm	4	2.07	2.3	2.47	1.53	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.316.048.01-2	1.6	20 N·cm	4.8	2.6	2.93	3.5	1.3	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.316.048.02-2	1.6	20 N·cm	4.8	2.85	3	3.58	1.22	2.3	conical	31°	45° Chamfer	Hexalobular 1.70
41.316.064.01-2	1.6	20 N·cm	6.4	3.15	4.7	5	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.316.064.02-2	1.6	20 N·cm	6.4	1.6	4.08	5.48	0.92	2.3	conical	15°	45° Chamfer	Hexalobular 1.70
41.316.066.01-2	1.6	20 N·cm	6.6	1.95	4.78	5.2	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.316.071.01-2	1.6	20 N·cm	7.1	2.8	5.2	5.54	1.56	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.316.072.01-2	1.6	20 N·cm	7.2	3.5	5.2	5.82	1.38	2.3	conical	30°	45° Chamfer	Hexalobular 1.70
41.316.073.01-2	1.6	20 N·cm	7.3	2.2	4.71	5.56	1.74	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.316.076.01-2	1.6	20 N·cm	7.6	3.5	6.1	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.316.078.01-2	1.6	20 N·cm	7.84	2.2	5.51	7.04	0.8	2.3	conical	15°	45° Chamfer	Hexalobular 1.70
41.316.079.01-2	1.6	20 N·cm	7.9	2.30	5.42	6.60	1.3	2.3	conical	20°	45° Chamfer	Hexalobular 1.70
41.316.080.01-2	1.6	20 N·cm	8	3	6.3	6.51	1.49	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.316.081.01-2	1.6	20 N·cm	8.1	3	6.35	6.73	1.37	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.316.084.01-2	1.6	20 N·cm	8.4	3.5	6.8	-	1.6	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.316.084.02-2	1.6	20 N·cm	8.4	2.7	5.85	6.85	1.55	2.3	conical	30°	45° Chamfer	Hexalobular 1.70
41.316.086.01-2	1.6	20 N·cm	8.6	3	7.2	-	1.4	2.3	straight	-	45° Chamfer	Hexalobular 1.70
41.316.094.01-2	1.6	20 N·cm	9.4	2.9	7.62	8	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.316.108.01-2	1.6	20 N·cm	10.8	2.2	4.72	5.56	5.24	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.316.115.01-2	1.6	20 N·cm	11.5	3.5	5.2	5.82	5.68	2.3	conical	30°	45° Chamfer	Hexalobular 1.70
41.316.118.01-2	1.6	20 N·cm	11.8	3.5	6.1	-	5.7	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.316.124.01-2	1.6	20 N·cm	12.4	2.2	5.55	7.05	5.35	2.3	conical	15°	45° Chamfer	Hexalobular 1.70
41.316.132.01-2	1.6	20 N·cm	13.2	2.9	7.63	8	5.2	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.317.040.01-2	N1-72	25 N·cm	4	2.1	2.5	-	1.5	2.3	straight	-	45° Chamfer	Hexalobular 1.70
41.317.041.01-2	N1-72	25N·cm	4.1	1.9	2.3	2.47	1.63	2.3	conical	55°	45° Chamfer	Hexalobular 1.70
41.317.065.01-2	N1-72	25 N·cm	6.5	2.4	4.7	5.18	1.33	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.317.073.01-2	N1-72	25 N·cm	7.3	2.5	5.5	5.77	1.53	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.317.106.01-2	N1-72	25 N·cm	10.6	2.8	5.54	5.65	4.95	2.3	conical	70°	Semi-sphere	Hexalobular 1.70
41.318.043.01-2	1.8	25 N·cm	4.3	2	2.52	2.7	1.6	2.3	conical	55°	45° Chamfer	Hexalobular 1.70
41.318.044.01-2	1.8	25 N·cm	4.4	2.75	3	-	1.4	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.318.045.01-2	1.8	25 N·cm	4.5	2.3	2.81	2.9	1.6	2.3	conical	70°	45° Chamfer	Hexalobular 1.70
41.318.051.01-2	1.8	25 N·cm	5.1	2.7	3.55	3.7	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.318.064.01-2	1.8	25 N·cm	6.4	3.45	4.7	5.1	1.3	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.318.065.01-2	1.8	25 N·cm	6.5	2.83	5	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.318.067.01-2	1.8	25 N·cm	6.7	2.35	4.93	5.4	1.3	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.318.068.01-2	1.8	25 N·cm	6.8	4	5.25	5.4	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.318.071.01-2	1.8	25 N·cm	7.1	2.6	5.54	5.65	1.45	2.3	conical	70°	45° Chamfer	Hexalobular 1.70
41.318.074.01-2	1.8	25 N·cm	7.4	3.8	5.8	6.04	1.36	2.3	conical	50°	45° Chamfer	Hexalobular 1.70
41.318.075.01-2	1.8	25 N·cm	7.5	3.3	6.1	-	1.4	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.318.076.01-2	1.8	25 N·cm	7.6	2.52	5.73	6.2	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.318.077.01-2	1.8	25 N·cm	7.7	2.5	5.59	6.5	1.2	2.3	conical	30°	45° Chamfer	Hexalobular 1.70
41.318.077.02-2	1.8	25 N·cm	7.7	2.2	6.08	6.35	1.35	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.318.080.01-2	1.8	25 N·cm	8	4	6.5	-	1.5	2.3	straight	-	45° Chamfer	Hexalobular 1.70
41.318.083.01-2	1.8	25 N·cm	8.3	4.25	6.79	6.95	1.35	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.320.048.01-2	2	25 N·cm	4.8	2.7	3.3	3.4	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.320.051.01-2	2	25 N·cm	5.1	3.1	3.6	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.320.060.01-2	2	25 N·cm	6	2.7	4.5	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.320.065.01-2	2	25 N·cm	6.5	2.7	5	-	1.5	2.3	straight	-	45° Chamfer	Hexalobular 1.70
41.320.068.01-2	2	25 N·cm	6.8	4.4	5.3	5.4	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.320.090.01-2	2	25 N·cm	9	4	7.5	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.320.094.01-2	2	25 N·cm	9.4	3	7.84	8	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1.70

DYNAMIC SCREWS TECHNICAL SPECIFICATIONS

DYNAMIC ABUTMENT SOLUTIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
41.320.117.01-2	2	25 N·cm	11,7	2,75	5,91	6,18	5,52	2,3	conical	35°	Semi-sphere	Hexalobular 1,70
41.320.125.01-2	2	25 N·cm	12,5	3,3	6,33	6,5	6	2,3	conical	45°	45° Chamfer	Hexalobular 1,70
41.320.129.01-2	2	25 N·cm	12,9	4,7	6,7	-	6,2	2,4	straight	-	Semi-sphere	Hexalobular 1,70
41.320.137.01-2	2	25 N·cm	13,7	4	7,5	-	6,2	2,3	straight	-	Semi-sphere	Hexalobular 1,70
41.325.067.01-2	2,5	25 N·cm	6,7	4,6	5,1	-	1,6	2,85	straight	-	Semi-sphere	Hexalobular 1,70
41.318.051.01-2	1,8	25 N·cm	5,1	2,7	3,55	3,7	1,4	2,3	conical	60°	45° Chamfer	Hexalobular 1,70
41.318.051.02-2	1,8	25 N·cm	5,1	2,7	3,38	3,65	1,45	2,3	conical	45°	45° Chamfer	Hexalobular 1,70
41.318.064.01-2	1,8	25 N·cm	6,4	3,45	4,7	5,1	1,3	2,3	conical	35°	45° Chamfer	Hexalobular 1,70
41.318.067.01-2	1,8	25 N·cm	6,7	2,35	4,93	5,4	1,3	2,3	conical	45°	45° Chamfer	Hexalobular 1,70
41.318.069.01-2	1,8	25N·cm	6,9	3,5	5,4	-	1,5	2,3	straight	-	45° Chamfer	Hexalobular 1,70
41.318.070.01-2	1,8	25N·cm	7	3,4	5,303	5,7	1,3	2,3	conical	-	45° Chamfer	Hexalobular 1,70
41.318.071.01-2	1,8	25 N·cm	7,1	2,6	5,54	5,65	1,45	2,3	conical	70°	45° Chamfer	Hexalobular 1,70
41.318.074.01-2	1,8	25 N·cm	7,4	3,8	5,8	6,04	1,36	2,3	conical	50°	45° Chamfer	Hexalobular 1,70
41.318.076.01-2	1,8	25 N·cm	7,6	2,52	5,73	6,2	1,4	2,3	conical	45°	45° Chamfer	Hexalobular 1,70
41.318.077.01-2	1,8	25 N·cm	7,7	2,5	5,59	6,5	1,2	2,3	conical	30°	45° Chamfer	Hexalobular 1,70
41.318.079.01-2	1,8	25 N·cm	7,9	4	6,34	6,5	1,4	2,3	conical	60°	45° Chamfer	Hexalobular 1,70
41.318.080.01-2	1,8	25 N·cm	8	4	6,5	-	1,5	2,3	straight	-	45° Chamfer	Hexalobular 1,70
41.318.083.01-2	1,8	25 N·cm	8,3	4,25	6,79	6,95	1,35	2,3	conical	60°	45° Chamfer	Hexalobular 1,70
41.318.111.01-2	1,8	25 N·cm	11,1	2,2	6,06	6,35	4,75	2,3	conical	60°	45° Chamfer	Hexalobular 1,70
41.318.122.01-2	1,8	25N·cm	12,2	3,8	5,8	6	6,2	2,3	conical	50°	45° Chamfer	Hexalobular 1,70
41.320.038.01-2	2	25N·cm	3,81	2,35	2,35	2,42	1,39	2,35	conical	70°	45° Chamfer	Hexalobular 1,70
41.320.039.01-2	2	25N·cm	3,9	1,9	2,41	2,5	1,4	2,3	conical	60°	45° Chamfer	Hexalobular 1,70
41.320.042.01-2	2	25 N·cm	4,2	2,2	3,1	-	1,1	2,315	straight	-	30° Chamfer	Hexalobular 1,70
41.320.043.01-2	2	25 N·cm	4,3	2	2,5	-	1,8	2,3	straight	-	45° Chamfer	Hexalobular 1,70
41.320.044.01-2	2	25 N·cm	4,4	2,45	2,95	3,1	1,3	2,3	conical	45°	45° Chamfer	Hexalobular 1,70
41.320.047.01-2	2	25 N·cm	4,7	3	3,3	-	1,4	2,3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.048.01-2	2	25 N·cm	4,8	2,7	3,3	3,4	1,4	2,3	conical	60°	45° Chamfer	Hexalobular 1,70
41.320.050.01-2	2	25N·cm	5	2,8	3,35	3,6	1,4	2,3	conical	31°	Semi-sphere	Hexalobular 1,70
41.320.050.02-2	2	25N·cm	5	3	3,5	-	1,5	1,5	straight	-	45° Chamfer	Hexalobular 1,70
41.320.051.01-2	2	25 N·cm	5,1	3,1	3,6	-	1,5	2,3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.052.01-2	2	25 N·cm	5,2	3	3,7	-	1,5	2,6	straight	-	30° Chamfer	Hexalobular 1,70
41.320.060.01-2	2	25 N·cm	6	2,7	4,5	-	1,5	2,3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.065.01-2	2	25 N·cm	6,5	2,7	5	-	1,5	2,3	straight	-	45° Chamfer	Hexalobular 1,70
41.320.067.01-2	2	25 N·cm	6,7	2,3	3,59	5,7	1	2,58	conical	15°	45° Chamfer	Hexalobular 1,70
41.320.068.01-2	2	25 N·cm	6,8	4,4	5,3	5,4	1,4	2,3	conical	60°	45° Chamfer	Hexalobular 1,70
41.320.070.01-2	2	25 N·cm	7	3	5,6	-	1,4	2,3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.071.01-2	2	25N·cm	7,1	4	5,11	5,55	1,55	2,3	conical	20°	45° Chamfer	Hexalobular 1,70
41.320.074.01-2	2	25 N·cm	7,4	3,3	6	-	1,4	2,3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.075.01-2	2	25 N·cm	7,5	2,75	5,9	6,19	1,31	2,3	conical	35°	Semi-sphere	Hexalobular 1,70
41.320.079.01-2	2	25 N·cm	7,9	3,3	6,32	6,5	1,4	2,3	conical	45°	45° Chamfer	Hexalobular 1,70
41.320.081.01-2	2	25N·cm	8,1	4,6	5,53	5,8	2,3	2,3	conical	65°	45° Chamfer	Hexalobular 1,70
41.320.082.01-2	2	25 N·cm	8,2	4,7	6,7	-	1,5	2,4	straight	-	Semi-sphere	Hexalobular 1,70
41.320.090.01-2	2	25 N·cm	9	4	7,5	-	1,5	2,3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.094.01-2	2	25 N·cm	9,4	3	7,84	8	1,4	2,3	conical	45°	45° Chamfer	Hexalobular 1,70
41.320.094.02-2	2	25N·cm	9,4	3	7,9	-	1,5	2,3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.117.01-2	2	25 N·cm	11,7	2,75	5,91	6,18	5,52	2,3	conical	35°	Semi-sphere	Hexalobular 1,70
41.320.125.01-2	2	25 N·cm	12,5	3,3	6,33	6,5	6	2,3	conical	45°	45° Chamfer	Hexalobular 1,70
41.320.129.01-2	2	25 N·cm	12,9	4,7	6,7	-	6,2	2,4	straight	-	Semi-sphere	Hexalobular 1,70
41.320.137.01-2	2	25 N·cm	13,7	4	7,5	-	6,2	2,3	straight	-	Semi-sphere	Hexalobular 1,70
41.325.054.01-2	2,5	25 N·cm	5,4	4,6	4,1	-	1,3	2,865	straight	-	Semi-sphere	Hexalobular 1,70
41.325.067.01-2	2,5	25 N·cm	6,7	4,6	5,1	-	1,6	2,85	straight	-	Semi-sphere	Hexalobular 1,70

STRARICHT SCREWS TECHNICAL SPECIFICATIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
40.312.003.01-2	1,2	0,25	15 N·cm	7,85	2,7	6,2	6,55	1,3	1,9	conical	45° Chamfer	Hex. 1,20
40.314.003.01-2	1,4	0,3	15 N·cm	3,9	1,91	2,1	-	1,8	2,4	straight	45° Chamfer	Hex. 1,20
40.314.003.02-2	1,4	0,3	15 N·cm	4	2	2,2	-	1,8	2,3	straight	45° Chamfer	Hex. 1,20
40.314.003.03-2	1,4	0,3	15 N·cm	7,6	2,4	6,05	6,3	1,3	1,9	conical	45° Chamfer	Hex. 1,20
40.314.003.04-2	1,4	0,3	15 N·cm	7,5	2,5	5,45	5,7	1,8	1,85	conical	45° Chamfer	Hex. 1,20
40.314.003.05-2	1,4	0,3	15 N·cm	5,3	1,34	3,7	-	1,6	2,1	straight	30° Chamfer	Hex. 1,25
40.314.004.01-2	1,4	0,3	15 N·cm	6,3	2,2	4,6	5,1	1,2	2,1	conical	30° Chamfer	Hex. 1,25
40.314.005.01-2	1,4	0,3	15 N·cm	7,6	3,6	5,21	6	1,6	2,15	conical	45° Chamfer	Hex. 1,27
40.314.005.02-2	1,4	0,3	15 N·cm	7,5	2,4	5,5	5,7	1,8	2,1	conical	45° Chamfer	Hex. 1,27
40.314.005.04-2	1,4	0,3	15 N·cm	4	1,7	2,25	-	1,75	2,1	straight	45° Chamfer	Hex. 1,27
40.314.007.01-2	1,4	0,3	15 N·cm	4	1,8	2,01	2,8	1,2	2,2	conical	45° Chamfer	Torx T6
40.314.007.02-2	1,4	0,3	15 N·cm	7	2,1	6,2	2,25	0,8	2,1	conical	45° Chamfer	Torx T6
40.314.007.03-2	1,4	0,3	15 N·cm	5,1	1,1	3,35	3,9	1,2	2,1	conical	45° Chamfer	Torx T6
40.314.008.01-2	1,4	0,3	15 N·cm	3,6	1,8	2,1	-	1,5	2,1	straight	45° Chamfer	Unigrip
40.314.008.02-2	1,4	0,3	15 N·cm	6,7	2,5	4,87	5,3	1,4	1,8	conical	45° Chamfer	Unigrip
40.314.008.03-2	1,4	0,3	15 N·cm	6,65	1,6	3,65	5,75	0,9	2,95	conical	45° Chamfer	Unigrip
40.314.008.04-2	1,4	0,3	15 N·cm	4,8	1,1	3,05	3,6	1,2	2,1	conical	45° Chamfer	Unigrip
40.314.012.01-2	1,4	0,3	15 N·cm	4,5	1,7	2,01	2,4	2,1	2,15	conical	45° Chamfer	Star 1,50
40.314.014.01-2	1,4	0,3	15 N·cm	4,45	2,3	2,48	-	1,97	2,16	straight	45° Chamfer	Hex. 1,19
40.315.008.01-2	No-80	0,317	15 N·cm	8,3	2,45	5,79	5,95	2,35	2	conical	45° Chamfer	Unigrip
40.316.002.01-2	1,6	0,35	20 N·cm	7	2,79	4,86	5,44	1,56	2,3	conical	45° Chamfer	Cuad. 1,30
40.316.002.02-2	1,6	0,35	20 N·cm	9,3	3,3	7,3	-	2	2,3	straight	Semi-sphere	Cuad. 1,30
40.316.003.01-2	1,6	0,35	20 N·cm	8,4	2,5	6,6	-	1,8	2	straight	45° Chamfer	Hex. 1,20
40.316.003.02-2	1,6	0,35	20 N·cm	10,2	2	7,88	8,2	2	2,2	conical	45° Chamfer	Hex. 1,20
40.316.004.02-2	1,6	0,35	20 N·cm	8,8	3	6,73	7	1,8	2,1	conical	45° Chamfer	Hex. 1,25
40.316.004.03-2	1,6	0,35	20 N·cm	6,9	2,2	5,02	5,2	1,7	1,92	conical	45° Chamfer	Hex. 1,25
40.316.005.01-2	1,6	0,35	20 N·cm	7,5	3,6	5,44	5,9	1,6	2,13	conical	45° Chamfer	Hex. 1,27
40.316.005.02-2	1,6	0,35	20 N·cm	8,25	3	6,25	-	2	2,33	straight	45° Chamfer	Hex. 1,27
40.316.005.03-2	1,6	0,35	20 N·cm	8,25	3,03	6,25	-	2	2,45	straight	45° Chamfer	Hex. 1,27
40.316.005.04-2	1,6	0,35	20 N·cm	10,5	3,2	8,15	8,4	2,1	2,1	conical	45° Chamfer	Hex. 1,27
40.316.005.05-2	1,6	0,35	20 N·cm	7,6	2,7	5,21	5,5	2,1	2,1	conical	45° Chamfer	Hex. 1,27
40.316.005.06-2	1,6	0,35	20 N·cm	3,8	1,8	2,2	-	1,6	2,1	straight	45° Chamfer	Hex. 1,27
40.316.005.07-2	1,6	0,35	20 N·cm	8,8	2,85	6,73	6,9	1,9	2,15	conical	45° Chamfer	Hex. 1,27
40.316.005.08-2	1,6	0,35	20 N·cm	9	3,9	6,49	6,9	2,1	2,18	conical	45° Chamfer	Hex. 1,27
40.316.005.09-2	1,6	0,35	20 N·cm	8,5	1,6	6,46	7	1,5	2,2	conical	45° Chamfer	Hex. 1,27
40.316.007.01-2	1,6	0,35	20 N·cm	7,9	2	5,63	6,9	1	2,18	conical	45° Chamfer	Torx T6
40.316.007.02-2	1,6	0,35	20 N·cm	9	1,6	6,96	7,5	1,5	2,2	conical	45° Chamfer	Torx T6
40.316.008.02-2	1,6	0,35	20 N·cm	7,3	2,7	5,15	5,9	1,4	2,2	conical	45° Chamfer	Unigrip
40.316.008.03-2	1,6	0,35	20 N·cm	8,5	1,6	6,46	7	1,5	2,2	conical	45° Chamfer	Unigrip
40.316.012.01-2	1,6	0,35	20 N·cm	8	2,65	5,53	6	2	2,15	conical	45° Chamfer	Star 1,50
40.316.014.01-2	1,6	0,35	20 N·cm	7,9	2,3	5,42	6,46	1,44	2,2	conical	45° Chamfer	Hex. 1,19
40.317.002.01-2	N1-72	0,353	25 N·cm	8,17	3	5,31	5,87	2,3	2,4	conical	45° Chamfer	Cuad. 1,30
40.317.004.01-2	N1-72	0,353	25 N·cm	7,6	2,8	5,6	5,77	1,83	2,3	conical	45° Chamfer	Hex. 1,27
40.317.005.01-2	N1-72	0,353	25 N·cm	7,6	2,15	5,17	5,4	2,2	2,2	conical	45° Chamfer	Hex. 1,27
40.317.005.02-2	N1-72	0,353	25 N·cm	7,3	2,4	4,73	5,25	2,05	2,4	conical	45° Chamfer	Hex. 1,27
40.318.002.01-2	1,8	0,35	25 N·cm	7	3,2	5,2	-	1,8	2,5	straight	45° Chamfer	Cuad. 1,30
40.318.002.02-2	1,8	0,35	25 N·cm	8,3	2,6	6,6	-	1,7	2,45	straight	45° Chamfer	Cuad. 1,30
40.318.003.01-2	1,8	0,35	25 N·cm	6,8	3,3	5,2	-	1,6	2,3	straight	45° Chamfer	Hex. 1,20
40.318.003.02-2	1,8	0,35	25 N·cm	8	3,6	6	-	2	2,1	straight	45° Chamfer	Hex. 1,20
40.318.004.01-2	1,8	0,35	25 N·cm	7,2	4,8	5,36	5,9	1,3	2,4	conical	45° Chamfer	Hex. 1,25
40.318.004.02-2	1,8	0,35	25 N·cm	9,8	5,8	7,96	8,5	1,3	2,4	conical	45° Chamfer	Hex. 1,25
40.318.004.03-2	1,8	0,35	25 N·cm	7,65	3,3	5,17	5,75	1,9	2,4	conical	45° Chamfer	Hex. 1,25
40.318.005.01-2	1,8	0,35	25 N·cm	4,5	2,3	2,8	2,9	1,6	2,33	conical	45° Chamfer	Hex. 1,27
40.318.005.02-2	1,8	0,35	25 N·cm	7,6	3,6	5,76	6	1,6	2,33	conical	45° Chamfer	Hex. 1,27
40.318.005.03-2	1,8	0,35	25 N·cm	8,5	1,6	6,56	7	1,5	2,2	conical	45° Chamfer	Hex. 1,27
40.318.005.04-2	1,8	0,35	25 N·cm	5,2	1,6	3,41	3,8	1,4	2,2	conical	45° Chamfer	Hex. 1,27
40.318.006.01-2	1,8	0,35	25 N·cm	6	3	3,67	4	2	2,4	conical	45° Chamfer	Hex. 1,70
40.318.007.01-2	1,8	0,35	25 N·cm	9,1	4,25	7,32	7,45	1,65	2,18	conical	45° Chamfer	Torx T6
40.318.008.01-2	1,8	0,35	25 N·cm	8,3	2,5	6,5	-	1,8	2,45	straight	45° Chamfer	Unigrip
40.318.012.01-2	1,8	0,35	25 N·cm	7,25	2,4	4,93	5,25	2	2,15	conical	45° Chamfer	Star 1,50
40.318.012.02-2	1,8	0,35	25 N·cm	8	2,6	5,68	6	2	2,15	conical	45° Chamfer	Star 1,50

STRARICHT SCREWS TECHNICAL SPECIFICATIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
40.318.013.01-2	1,8	0,35	25 N·cm	7,7	2,5	5,7	6,4	1,3	2,2	conical	45° Chamfer	Hex. 1,00
40.320.002.01-2	2	0,4	30 N·cm	4,9	3,26	3,26	3,5	1,4	2,49	conical	45° Chamfer	Cuad. 1,30
40.320.002.02-2	2	0,4	30 N·cm	7,45	3	5,7	5,9	1,5	2,4	conical	45° Chamfer	Cuad. 1,30
40.320.002.03-2	2	0,4	30 N·cm	10,2	3,15	8,4	-	1,8	2,45	straight	45° Chamfer	Cuad. 1,30
40.320.003.01-2	2	0,4	30 N·cm	4,7	3	3,33	-	1,37	2,35	straight	45° Chamfer	Hex. 1,20
40.320.003.02-2	2	0,4	30 N·cm	7	3,25	5	-	2	2,4	straight	45° Chamfer	Hex. 1,20
40.320.003.03-2	2	0,4	30 N·cm	7,9	3,7	5,55	6,05	1,85	2,4	conical	45° Chamfer	Hex. 1,20
40.320.003.04-2	2	0,4	30 N·cm	8,4	2,75	5,68	6,35	2,05	2,3	conical	45° Chamfer	Hex. 1,20
40.320.003.05-2	2	0,4	30 N·cm	4,8	3,3	3,65	3,9	0,9	2,45	conical	45° Chamfer	Hex. 1,20
40.320.003.06-2	2	0,25	25 N·cm	4	2	2,5	-	1,5	2,3	straight	30° Chamfer	Hex. 1,20
40.320.003.07-2	2	0,25	25 N·cm	8,5	1,6	6,63	7	1,5	2,2	conical	45° Chamfer	Hex. 1,20
40.320.005.01-2	2	0,4	30 N·cm	7,6	3,7	6	-	1,6	2,33	straight	45° Chamfer	Hex. 1,27
40.320.005.02-2	2	0,4	30 N·cm	10,3	4	8,3	-	2	2,45	straight	45° Chamfer	Hex. 1,27
40.320.005.03-2	2	0,4	30 N·cm	10,3	3,5	8,3	-	2	2,33	straight	45° Chamfer	Hex. 1,27
40.320.005.04-2	2	0,4	30 N·cm	10,5	3,2	8,15	8,4	2,1	2,5	conical	45° Chamfer	Hex. 1,27
40.320.007.01-2	2	0,4	30 N·cm	6,7	2,25	3,59	5,7	1	2,58	conical	45° Chamfer	Torx T6
40.320.007.02-2	2	0,4	30 N·cm	7,4	3,3	6	-	1,4	2,3	straight	Semi-sphere	Torx T6
40.320.007.03-2	2	0,4	30 N·cm	7,4	2,8	5,9	6,1	1,3	2,4	conical	Semi-sphere	Torx T6
40.320.007.04-2	2	0,4	30 N·cm	4,6	2,96	3,21	3,5	1,1	2,45	conical	45° Chamfer	Torx T6
40.320.007.05-2	2	0,25	25 N·cm	5	3	3,5	-	1,5	2,6	straight	30° Chamfer	Torx T6
40.320.008.01-2	2	0,4	30 N·cm	7	3,25	5	-	2	2,4	straight	45° Chamfer	Unigrip
40.320.008.02-2	2	0,4	30 N·cm	7,3	3	5,8	6,2	1,1	2,5	conical	45° Chamfer	Unigrip
40.320.008.03-2	2	0,4	30 N·cm	10	3,1	8,5	-	1,5	2,45	straight	45° Chamfer	Unigrip
40.320.008.04-2	2	0,4	30 N·cm	8,5	1,6	6,63	7	1,5	2,2	conical	45° Chamfer	Unigrip
40.325.002.01-2	2,5	0,45	30 N·cm	7,41	3,5	4,75	5,29	2,12	2,87	conical	Semi-sphere	Cuad. 1,30
40.325.008.01-2	2,5	0,45	30 N·cm	7	2,8	5,6	-	1,4	3,4	straight	45° Chamfer	Unigrip
40.320.003.01-2	2	0,4	30 N·cm	4,7	3	3,33	-	1,37	2,35	straight	45° Chamfer	Hex. 1,20
40.320.003.02-2	2	0,4	30 N·cm	7	3,25	5	-	2	2,4	straight	45° Chamfer	Hex. 1,20
40.320.003.03-2	2	0,4	30 N·cm	7,9	3,7	5,55	6,05	1,85	2,4	conical	45° Chamfer	Hex. 1,20
40.320.003.04-2	2	0,4	30 N·cm	8,4	2,75	5,68	6,35	2,05	2,3	conical	45° Chamfer	Hex. 1,20
40.320.003.05-2	2	0,4	30 N·cm	4,8	3,3	3,65	3,9	0,9	2,45	conical	45° Chamfer	Hex. 1,20
40.320.003.06-2	2	0,25	25 N·cm	4	2	2,5	-	1,5	2,3	straight	30° Chamfer	Hex. 1,20
40.320.003.07-2	2	0,25	25 N·cm	8,5	1,6	6,63	7	1,5	2,2	conical	45° Chamfer	Hex. 1,20
40.320.003.08-2	2	0,4	25 N·cm	4,2	2,2	2,7	-	1,5	2,3	straight	30° Chamfer	Hex. 1,20
40.320.005.01-2	2	0,4	30 N·cm	7,6	3,7	6	-	1,6	2,33	straight	45° Chamfer	Hex. 1,27
40.320.005.02-2	2	0,4	30 N·cm	10,3	4	8,3	-	2	2,45	straight	45° Chamfer	Hex. 1,27
40.320.005.03-2	2	0,4	30 N·cm	10,3	3,5	8,3	-	2	2,33	straight	45° Chamfer	Hex. 1,27
40.320.005.04-2	2	0,4	30 N·cm	10,5	3,2	8,15	8,4	2,1	2,5	conical	45° Chamfer	Hex. 1,27
40.320.005.05-2	2	0,4	25 N·cm	9	2,15	6,93	7,3	1,7	2,2	conical	45° Chamfer	Hex. 1,27

SCREWDRIVERS



REF: 43.601.103.02-2
Hex. 1.20mm



REF: 43.601.102.01-2
Squa. 1.30mm



REF: 43.601.104.01-2
Hex. 1.25mm



REF: 43.625.105.01-2
Hex. 1.27mm



REF: 43.625.108.01-2
Unigrip



REF: 43.601.107.01-2
Torx T6

STRAIGHT SCREWS

Straight screws cover all the thread metrics available on the market. We have several lengths for each metric to make the adaptation to the milled structures easier.




DYNAMIC MILLING TOOL SPECIFICATIONS

DYNAMIC ABUTMENT SOLUTIONS



MAIN COMPATIBILITY	REFERENCE	CUTTING DIAMETER Øc	SEAT	CUTTING LENGTH Lc	USEFUL LENGTH (max. drilling depth) Lu	STEM CUTTING DIAMETER Øv	SUPPORT DIAMETER (SHANK) Øs	TOTAL LENGTH Lt
BEGO RS/RSX 3* ASTRA EVOLUTION 3.0* *Only for titanium and soft materials	33.325.472.01-2	1.4	25	0.4	4.7	0.5	3	50
	33.425.472.01-2	1.4	25	0.4	4.7	0.5	4	50
	33.625.472.01-2	1.4	25	0.4	4.7	0.5	6	50
STRAUMANN BONE LEVEL NP STRAUMANN BONE LEVEL RP MEDENTIS ICX TEMPLANT 4.1 STRAUMANN SYNOCTA 3.5 MEDENTIS ICX NARROW	33.315.804.01-2	1.6	15	0.7	8	0.65	3	50
	33.415.804.01-2	1.6	15	0.7	8	0.65	4	50
	33.615.804.01-2	1.6	15	0.7	8	0.65	6	50
ANTHOGYR AXIOM RG/PX XNP ANTHOGYR AXIOM RG/PX RP ANTHOGYR AXIOM RG/PX WP	33.320.704.01-2	1.6	20	0.7	7	0.8	3	50
	33.420.704.01-2	1.6	20	0.7	7	0.8	4	50
	33.620.704.01-2	1.6	20	0.7	7	0.8	6	50
ASTRA EVOLUTION 3.6 ANKYLOS ALPHABIO CONICAL STANDARD CONNECTION LASAK BIONIQ QR NEODENT GM ANKYLOS BALANCE BASE	33.330.734.01-2	1.6	30	0.7	7.3	0.8	3	50
	33.430.734.01-2	1.6	30	0.7	7.3	0.8	4	50
	33.630.734.01-2	1.6	30	0.7	7.3	0.8	6	50
NOBEL BIOCARE ACTIVE NP NOBEL BIOCARE ACTIVE 3.0 LASAK BIONIQ QN	33.335.754.01-2	1.6	35	0.7	7.5	0.65	0.5	50
	33.435.754.01-2	1.6	35	0.7	7.5	0.65	4	50
	33.635.754.01-2	1.6	35	0.7	7.5	0.65	6	50
OSSTEM TS NP CAMLOG SCREW LINE 3.8 NP CAMLOG SCREW LINE 4.3 RP KLOCKNER VEGA NV XIVE S 3.4 BIOTECH DENTAL KONTACT XNP BIOTECH DENTAL KONTACT RP DIO UF NP CAMLOG SCREW-LINE 3.3	33.345.804.01-2	1.6	45	0.7	8	0.65	3	50
	33.445.804.01-2	1.6	45	0.7	8	0.65	4	50
	33.645.804.01-2	1.6	45	0.7	8	0.65	6	50
MIS C1 NP MIS M4 NP CONELOG 3.8 CONELOG 4.3 ASTRA YELLOW ALPHABIO CONICAL HEX CONNECTION	33.360.754.01-2	1.6	60	0.7	7.5	0.65	3	50
	33.460.754.01-2	1.6	60	0.7	7.5	0.65	4	50
	33.660.754.01-2	1.6	60	0.7	7.5	0.65	6	50
BIOMET 3I CERTAIN NP ASTRA AQUA	33.390.754.01-2	1.6	90	0.7	7.5	0.65	3	50
	33.490.754.01-2	1.6	90	0.7	7.5	0.65	4	50
	33.690.754.01-2	1.6	90	0.7	7.5	0.65	6	50
ASTRA EVOLUTION 4.2	33.350.775.01-2	1.7	50	0.7	7.7	0.8	3	50
	33.450.775.01-2	1.7	50	0.7	7.7	0.8	4	50
	33.650.775.01-2	1.7	50	0.7	7.7	0.8	6	50
BIOMET 3I CERTAIN RP NOBEL BIOCARE BRANEMARK NP NOBEL BIOCARE REPLACE NP MEGAGEN ANYRIDGE RP BIOMET 3i CERTAIN WP	33.390.805.01-2	1.7	90	0.7	8	0.65	3	50
	33.490.805.01-2	1.7	90	0.7	8	0.65	4	50
	33.690.805.01-2	1.7	90	0.7	8	0.65	6	50
"BEGO S/RI 3.25-3.75 BEGO S/RI 4.1 BEGO S/RI 4.5 BEGO S/RI 5.50 STRAUMANN SCREW-RETAINED NC/RC BEGO MULTI-PLUS"	33.335.676.01-2	1.8	35	1	6.7	0.9	3	50
	33.435.676.01-2	1.8	35	1	6.7	0.9	4	50
	33.635.676.01-2	1.8	35	1	6.7	0.9	6	50
"KLOCKNER ESSENTIAL CONE 4.5 DIRECTO IMPLANTE KLOCKNER ESSENTIAL CONE 4.5 OCTACONE 12° KLOCKNER ESSENTIAL CONE 4.5 OCTACONE 25° KLOCKNER VEGA RV XIVE S 3.8 XIVE S 4.5 BIOHORIZONS 3.0 STRAUMANN SYNOCTA 6.5 STRAUMANN BLX RB STRAUMANN BLX WB STRAUMANN TLX NT STRAUMANN TLX RT STRAUMANN TLX WT DENTIUM MU SUPERLINE"	33.345.856.01-2	1.8	45	1	8.5	0.9	3	50
	33.445.856.01-2	1.8	45	1	8.5	0.9	4	50
	33.645.856.01-2	1.8	45	1	8.5	0.9	6	50

DYNAMIC MILLING TOOL SPECIFICATIONS

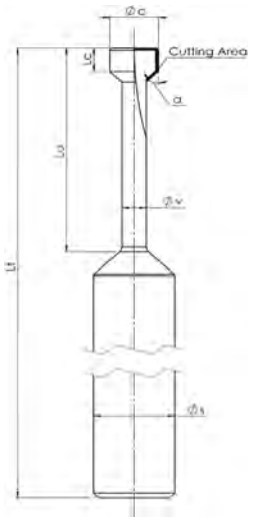

3 FLUTE T-SLOT CUTTER



MAIN COMPATIBILITY	REFERENCE	CUTTING DIAMETER Øc	SEAT	CUTTING LENGTH Lc	USEFUL LENGTH (max. drilling depth) Lu	STEM CUTTING DIAMETER Øv	SUPPORT DIAMETER (SHANK) Øs	TOTAL LENGTH Lt
"MIS C1 RP PALTOP UNIVERSAL MULTI UNIT MIS C1 WP S&M PREMIUM KHONO 3,3 S&M PREMIUM KHONO 3,8 S&M OUTLINK 3,3 S&M OUTLINK 4,1 S&M PREMIUM KHONO 4,25 BREDENT SKY NP BREDENT SKY RP ADIN TOUAREG/CLOSEFIT NP ADIN TOUAREG/CLOSEFIT UNP CAMLOG CONELOG 3.3 GLOBAL D (TEKKA) EASY IMPLANT MINI ROOT R"	33.360.756.01-2	1,8	60	1	7.5	0,9	3	50
	33.460.756.01-2	1,8	60	1	7.5	0,9	4	50
	33.660.756.01-2	1,8	60	1	7.5	0,9	6	50
"ZIMMER SCREW-VENT 3.5 ZIMMER SCREW-VENT 4.5 ASTRA EVOLUTION UNIT ABUTMENT ZIMMER TYPE 5.7 OXY FIXO	33.370.716.01-2	1,8	70	1	7.1	0,9	3	50
	33.470.716.01-2	1,8	70	1	7.1	0,9	4	50
	33.670.716.01-2	1,8	70	1	7.1	0,9	6	50
"NOBEL BIOCARE BRANEMARK RP NOBEL BIOCARE MULTI-UNIT RP BIOMET 3I OSSEOTITE NP BTI EXTERNAL CONNECTION NP BTI INTERNAL CONNECTION RP MIS MULTI-UNIT ST KEYSTONE PRIMA NP KEYSTONE PRIMA RP KEYSTONE PRIMA WP NEOSS PROACTIVE 3.4 NEOSS PROACTIVE 4.1 BIOMET 3i OSSEOTITE WP BTI EXTERNAL CONNECTION WP BTI MULTI-IM UNIVERSAL RP ANTHOGYRD MULTI-UNIT 4.8 BEGO MINI BTI INTERNAL WP LASAK MULTI-UNIT QN/QR SIC SICACE 3.3 SIC SICACE 4.2 IMPLANT DIRECT"	33.390.716.01-2	1,8	90	1	7.1	0,9	3	50
	33.490.716.01-2	1,8	90	1	7.1	0,9	4	50
	33.690.716.01-2	1,8	90	1	7.1	0,9	6	50
"STRAUMANN INTERNAL OCTAGON RP STRAUMANN INTERNAL OCTAGON 6.5"	33.315.708.01-2	1,8	15	1	7	1	3	50
	33.415.708.01-2	2	15	1	7	1	4	50
	33.615.708.01-2	2	15	1	7	1	6	50
STRAUMANN SYNOCTA RP	33.330.708.01-2	2	30	1	7	1	3	50
	33.430.708.01-2	2	30	1	7	1	4	50
	33.630.708.01-2	2	30	1	7	1	6	50
"NOBEL BIOCARE ACTIVE RP NOBEL BIOCARE ACTIVE WP"	33.335.758.01-2	2	35	1	7.5	1	3	50
	33.435.758.01-2	2	35	1	7.5	1	4	50
	33.635.758.01-2	2	35	1	7.5	1	6	50
"OSSTEM TS RP CAMLOG SCREW-LINE 5.0 CAMLOG SCREW-LINE 6.0"	33.345.808.01-2	2	45	1	8	1	3	50
	33.445.808.01-2	2	45	1	8	1	4	50
	33.645.808.01-2	2	45	1	8	1	6	50
"NOBEL BIOCARE REPLACE RP ASTRA LILAC NOBEL BIOCARE REPLACE WP ASTRA EVOLUTION 4.8 NOBEL BIOCARE BRANEMARK WP ASTRA EVOLUTION 5.4 NOBEL BIOCARE REPLACE 6.0"	33.390.958.01-2	2	90	1	9.5	1	3	50
	33.490.958.01-2	2	90	1	9.5	1	4	50
	33.690.958.01-2	2	90	1	9.5	1	6	50

SCREWDRIVER ADAPTOR

Screwdriver for the Dynamic Scanbody System



Ref. 43.621.410.01-2
Screwdriver with manual handle
Standard length: 21 mm



Ref. 43.624.410.01-2
Contra-angle
Length: 24 mm



Ref. 43.621.415.01-2
Tiny Screwdriver with manual handle
Length: 21 mm



Ref. 43.620.411.01-2
Multi-Unit
Contra-angle
Length: 20 mm

COMPLEMENTS



Manual handle

Made of stainless steel.
They are used to connect screwdriver bits with the contra-angle connection

Large manual handle for laboratory

Ref. 49.601.000.03-2

Ideal to manipulate models in the laboratory
Length: 55.65 mm



Manual handle for clinic

Ref. 49.601.000.01-2

Clinic handle: used to position the prosthesis in the mouth prior to torque control in the clinic.
Length: 15.65 mm



Universal manual torque wrench prosthetic

Ref. 11.990.990.07-2

Torque wrench
4 mm square connection.
Torque 10-35N.c



Dynamic Screw Transfer

Ref. 49.413.000.01-2

Manual torque wrench adapter prosthetic

Piece to connect the screwdriver with contra-angle connection to the torque wrench.



Universal Manual torque wrench adapter
Ref. 49.604.000.05-2
4 mm Square connection



Straumann Manual torque wrench adapter
Ref. 49.604.000.07-2
Straumann connection



Nobel Biocare Manual torque wrench adapter
Ref. 49.604.000.08-2



MIS Manual torque wrench adapter
Ref. 49.604.000.09-2

DYNAMIC SCREWDRIVERS

Screwdriver with hexalobular head, exclusively to the 3.0 Dynamic Abutment System.
Lenghts: 18, 24, 32 mm



Ref. 43.618.201.01-2
Hexalobular 1,70 mm.
Lenght: 18 mm



Ref. 43.624.201.01-2
Hexalobular 1,70 mm.
Lenght: 24 mm



Ref. 43.632.201.01-2
Hexalobular 1,70 mm.
Lenght: 32 mm

DAS MU SYSTEM COMPONENTS



MU Dynamic TiBase
Non-engaging*
31.322.209.01-2

Engaging*
31.312.209.01-2



MU Dynamic 3TiBase
Non-engaging*
31.322.209.21-2



Reference Scanbody
Non-engaging*
54.322.209.31-2



Engaging*
54.312.209.31-2



Healing Cap
Regular
40.320.003.88-2



Wide
40.320.003.89-2



MU ScAnalog
23.412.209.01-2



MU Scanbody 4,5 mm
53.412.209.01-2



MU Scanbody 8 mm
Non-engaging*
53.422.209.02-2



MU Dynamic Scanbody
52.408.137.01-2



Dynamic Scanbody Adaptor
50.312.209.01-2



Screwdriver Adaptor
43.621.410.01-2



43.624.410.01-2



Impression coping
Non-engaging*
29.301.000.11-2



Titanium Abutment
Non-engaging*
35.312.209.21-2

Engaging*
35.322.209.21-2



Digital Analog
34.312.209.01-2



Analog
22.612.209.01-2



Digital Analog Positioner
49.309.000.01-2



Dynamic Screw
41.320.040.01-2



Provisional (temporary) Dynamic Screw
41.320.050.02-2



Straight Screw
40.320.003.06-2


COMPONENTS OPTIONS: * Non-engaging = R * Engaging = NR

DAS MU SYSTEM COMPONENTS

Peek Pins



Type A
49.414.000.01-2 (6 mm)
49.415.000.01-2 (9 mm)
49.416.000.01-2 (13 mm)



Type B
49.414.000.02-2 (6 mm)
49.415.000.02-2 (9 mm)
49.416.000.02-2 (13 mm)



Type C
49.414.000.03-2 (6 mm)
49.415.000.03-2 (9 mm)
49.416.000.03-2 (13 mm)



Type D
49.416.000.04-2 (13 mm)



Type E
49.416.000.05-2 (13 mm)

CAPS



Regular
49.418.000.01-2 (3,8 mm)
49.419.000.01-2 (6 mm)
49.420.000.01-2 (8 mm)



Wide
49.418.000.02-2 (3,8 mm)
49.419.000.02-2 (6 mm)
49.420.000.02-2 (8 mm)



Ratchet
49.409.000.01-2



Screwdriver
43.321.316.01-2



43.322.316.01-2



Mu ANG Insertion tool
49.422.000.01-2



Dynamic Screwdriver
43.618.201.01-2 (18 mm)
43.624.201.01-2 (24 mm)
43.632.201.01-2 (32 mm)



Screwdriver Hex.1,2
43.601.103.02-2



MU DMTone
33.390.716.01-2 Shank Ø3
33.490.716.01-2 Shank Ø4
33.690.716.01-2 Shank Ø6

COMPONENTS OPTIONS: * Non-engaging = R * Engaging = NR

INTERNAL DAS MU SYSTEM COMPONENTS



MU Dynamic TiBase

Type A Engaging*
31.312.210.01-2



Type B Engaging*
31.313.210.01-2



Non-engaging*
31.322.210.01-2



Reference Scanbody

Engaging*
54.312.210.31-2




Healing Cap

Regular
40.318.003.89-2

Peek Pins



Type A
49.414.000.01-2 (6 mm)
49.415.000.01-2 (9 mm)
49.416.000.01-2 (13 mm)



Type B
49.414.000.02-2 (6 mm)
49.415.000.02-2 (9 mm)
49.416.000.02-2 (13 mm)



Type C
49.414.000.03-2 (6 mm)
49.415.000.03-2 (9 mm)
49.416.000.03-2 (13 mm)



Type D
49.416.000.04-2 (13 mm)



Type E
49.416.000.05-2 (13 mm)

CAPS



Regular
49.418.000.01-2 (3,8 mm)
49.419.000.01-2 (6 mm)
49.420.000.01-2 (8 mm)



Wide
49.418.000.02-2 (3,8 mm)
49.419.000.02-2 (6 mm)
49.420.000.02-2 (8 mm)



Dynamic Screw

41.318.050.01-2



Provisional (temporary) Dynamic Screw

41.318.057.01-2



Ratchet

49.409.000.02-2



Screwdriver

43.321.320.01-2



Digital Analog

34.312.210.01-2



Digital Analog Positioner

49.309.000.01-2



Dynamic Screwdriver

43.618.201.01-2 (18 mm)
43.624.201.01-2 (24 mm)
43.632.201.01-2 (32 mm)



MU DMTone

33.390.716.01-2 Shank Ø3
33.490.716.01-2 Shank Ø4
33.690.716.01-2 Shank Ø6

COMPONENTS OPTIONS: * Non-engaging = R * Engaging = NR

TALLADIUM GUARANTEE

TERMS AND CONDITIONS
These guarantee terms and conditions ("T&C") cover the entire range of Talladium products ("Products"), manufactured by TALLADIUM ESPAÑA S.L. and distributed by Geoda Medical S.L. or official dealers. The guarantee described in these T&C is exclusively in benefit of the clinician ("Clinician") and of the dental technician ("Technician") and not for the benefit of third parties or institutions, including patients.

GUARANTEE PERIOD
TALLADIUM ESPAÑA S.L. offers a lifelong guarantee for its entire range of products starting from the date of issue of the invoice.

GUARANTEE SCOPE
Subject to the limitations and exceptions described in these T&C, TALLADIUM ESPAÑA S.L. will offer the following benefits:
QUALITY: If there are defects in the materials or in the manufacturing of the Product, TALLADIUM ESPAÑA S.L. will replace the Product with no additional cost.
SAFETY: If, having complied with all the product indications, the prosthesis should have to be made again, due to a fault in the Dynamic Abutment or Dynamic Titanium Base system, TALLADIUM ESPAÑA S.L. will replace the abutments and screws necessary to remake the prosthesis, as well as the costs derived from its manufacturing.
In case of having used our products and having complied with all the product indications, the implants suffer any damage, TALLADIUM ESPAÑA S.L. will pay the cost of the implants. This coverage will only be valid during the first 6 months after the collocation of the prosthesis which includes our products.

CLAIM REQUIREMENTS AND PROCEDURE
To receive the benefits indicated in these T&C, the treating Clinician must satisfy the following requirements:
a) The claim must be notified to TALLADIUM ESPAÑA S.L. within (30) days since the date the claimed defect was detected.
b) This requires that the Clinician or Technician must contact the customer service department by telephone or by e-mail to make the claim.
c) A claim form will be completed, which, together with a document or report which justifies the faulty Product and the faulty Product itself, will be sent by the customer to TALLADIUM ESPAÑA S.L. offices, within the previously indicated period.
d) Clinicians or Technicians presenting a claim in agreement with these T&C must be up to date in any payments owing to TALLADIUM ESPAÑA S.L. or to any of its subsidiaries, at the time when the claim form is presented.
e) All the use procedures of our Products must be carried out in agreement with the instructions of TALLADIUM ESPAÑA S.L. as well as in accordance with commonly accepted dentistry practices.
f) The expenses derived from this procedure will be assumed by the customer. The return shipping costs will be assumed by TALLADIUM ESPAÑA S.L. in all those cases covered by these T&C.
Regardless of the guarantee rights, claims should be notified as soon as possible in order to comply with regulatory requirements.

GENERAL LIMITATIONS OF THIS GUARANTEE
With the exception of the guarantee described in these T&C, neither TALLADIUM ESPAÑA S.L. nor its representatives, nor third parties manufacturing or distributing the Products, represent or offer a guarantee, agreement or any other express or implicit, oral or written, commitment, with respect to the Products (without limitation), including guarantees involved in the marketing, durability or suitability for individual uses or purposes. In addition and within the maximum extent permitted by the relative law, TALLADIUM ESPAÑA S.L. rejects (on its own behalf, and on behalf of its representatives and third parties that manufacture or distribute Products) any responsibility with respect to any direct or indirect damage caused, which may result from or be a consequence of the design, composition of the dental prosthesis into which the Products are integrated.

GUARANTEE EXCLUSIONS
TALLADIUM ESPAÑA S.L. limits this guarantee to:
- Transformed abutments that form part of the dental prosthesis. But not the screws used to anchor them.
- Those products that are not used with the accessories and parts marketed by Talladium España


AMENDMENT OR SUSPENSION OF THE GUARANTEE
TALLADIUM ESPAÑA S.L. reserves the right to amend or withdraw these T&C at any time and without prior notification. Any modification or suspension shall not affect products already placed in patients.

This printed version is probably outdated and may not include all products or compatibilities.

Scan and download the latest version of this catalogue

www.dynamicabutment.com



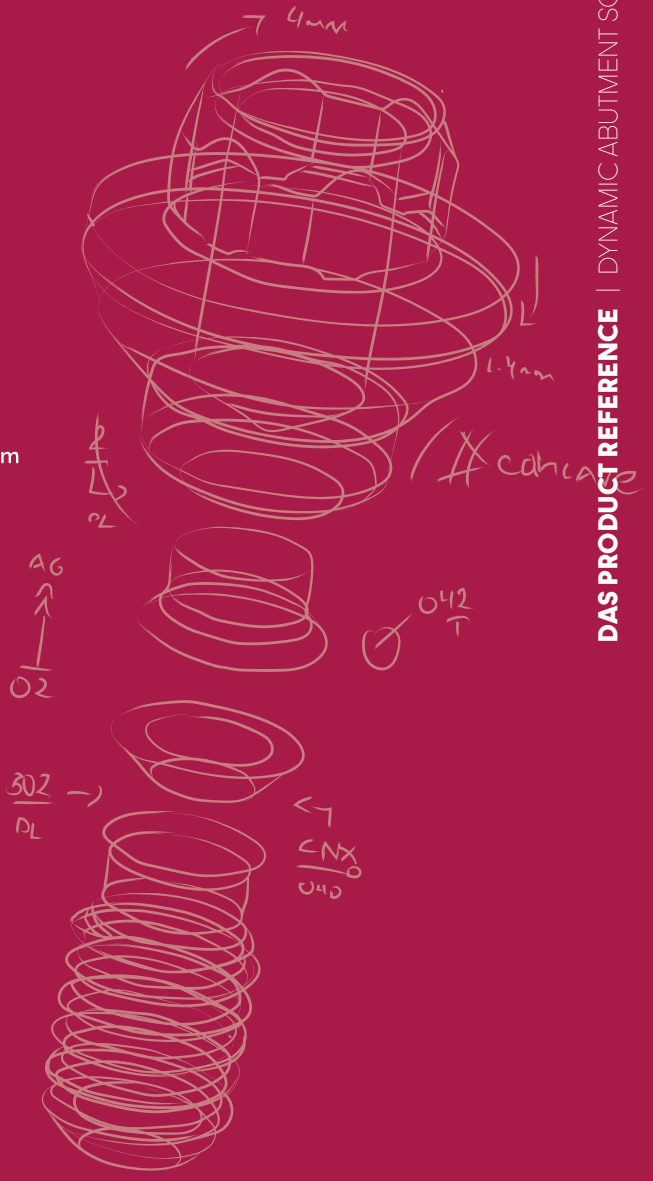

www.dynamicabutment.com

DAS PRODUCT REFERENCE | DYNAMIC ABUTMENT SOLUTIONS

DYNAMIC ABUTMENT SOLUTIONS

Virginia Woolf, 17
25005 · Lleida (Spain)

INTERNATIONAL +34 873 450 709
das@dynamicabutment.com

SPAIN +34 973 289 580
spain@dynamicabutment.com

2026-01